

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641565

Luminaire Tested: ML5612LSVWFL7597FS1E - 696WB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641565
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-92)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 696WB - 1200LM - 5000K
Description: ML56 RR, 75D TIR OPTIC, 6" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1647.7 lumens
Efficiency: N/A
Efficacy: 99.9 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641565
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 696WB - 1200LM - 5000K

Luminous Intensity Polar Plot

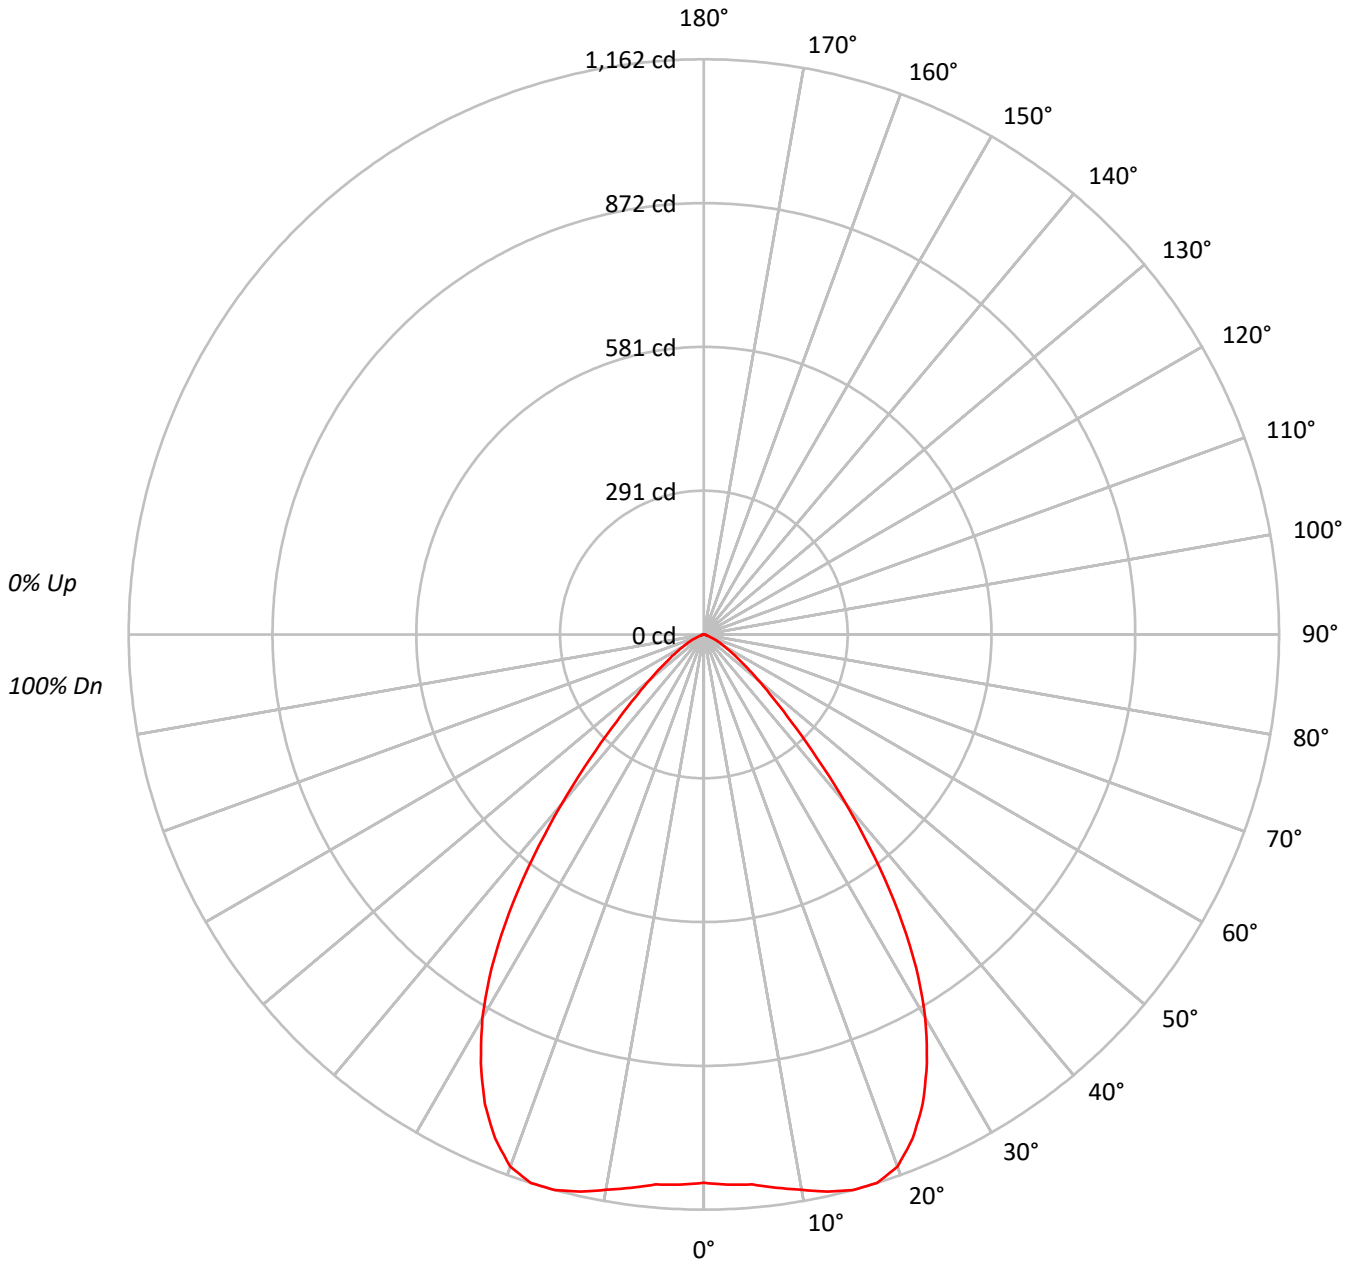



TEST NUMBER: P641565

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 696WB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	104	110	107	105	103	103	101	99	99	98	96	96	95	94	92			
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	77	76			
4	94	85	79	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69			
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	65	63			
6	83	73	66	61	81	72	65	61	70	64	60	69	64	60	67	63	59	58			
7	78	67	60	56	76	67	60	55	65	59	55	64	59	55	63	58	55	53			
8	73	63	56	51	72	62	56	51	61	55	51	60	54	51	59	54	50	49			
9	69	58	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45			
10	66	55	48	44	64	54	48	44	53	48	44	52	47	43	52	47	43	42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60735
5°	61380
10°	63426
15°	65942
20°	66733
25°	63294
30°	56635
35°	45916
40°	31910
45°	19320
50°	12290
55°	7895
60°	5263
65°	3502
70°	1683
75°	953
80°	947
85°	943

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19320 cd/sqm



TEST NUMBER: P641565

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 696WB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.3	6.5
10°-20°	327.4	19.9
20°-30°	476.1	28.9
30°-40°	421.5	25.6
40°-50°	203.6	12.4
50°-60°	77.6	4.7
60°-70°	26.7	1.6
70°-80°	5.3	0.3
80°-90°	2.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	910.8	55.3
0°-40°	1332.4	80.9
0°-60°	1613.6	97.9
0°-90°	1647.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1647.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1108	
5°	1115	107
15°	1162	327
25°	1046	476
35°	686	422
45°	249	204
55°	83	78
65°	27	27
75°	4	5
85°	2	2
90°	0	



TEST NUMBER: P641565

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 696WB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1107.9
2.5°	1112.4
5°	1115.4
7.5°	1127.4
10°	1139.4
12.5°	1152.9
15°	1161.9
17.5°	1161.9
20°	1143.9
22.5°	1101.9
25°	1046.4
27.5°	975.8
30°	894.7
32.5°	798.7
35°	686.1
37.5°	564.5
40°	445.9
42.5°	337.8
45°	249.2
47.5°	186.2
50°	144.1
52.5°	109.6
55°	82.6
57.5°	61.6
60°	48.0
62.5°	36.0
65°	27.0
67.5°	16.5
70°	10.5
72.5°	6.0
75°	4.5
77.5°	3.0
80°	3.0
82.5°	3.0
85°	1.5
87.5°	1.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)