

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641621

Luminaire Tested: ML5612LSVWFL97FS1E - 592W - 1200LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641621  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-96)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL97FS1E - 592W - 1200LM - 2700K  
Description: ML56 RR, MILKY OPTIC, 5" WHITE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1287.6 lumens  
Efficiency: N/A  
Efficacy: 78.0 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.14  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641621  
CATALOG NUMBER: ML5612LSVWFL97FS1E - 592W - 1200LM - 2700K

### Luminous Intensity Polar Plot

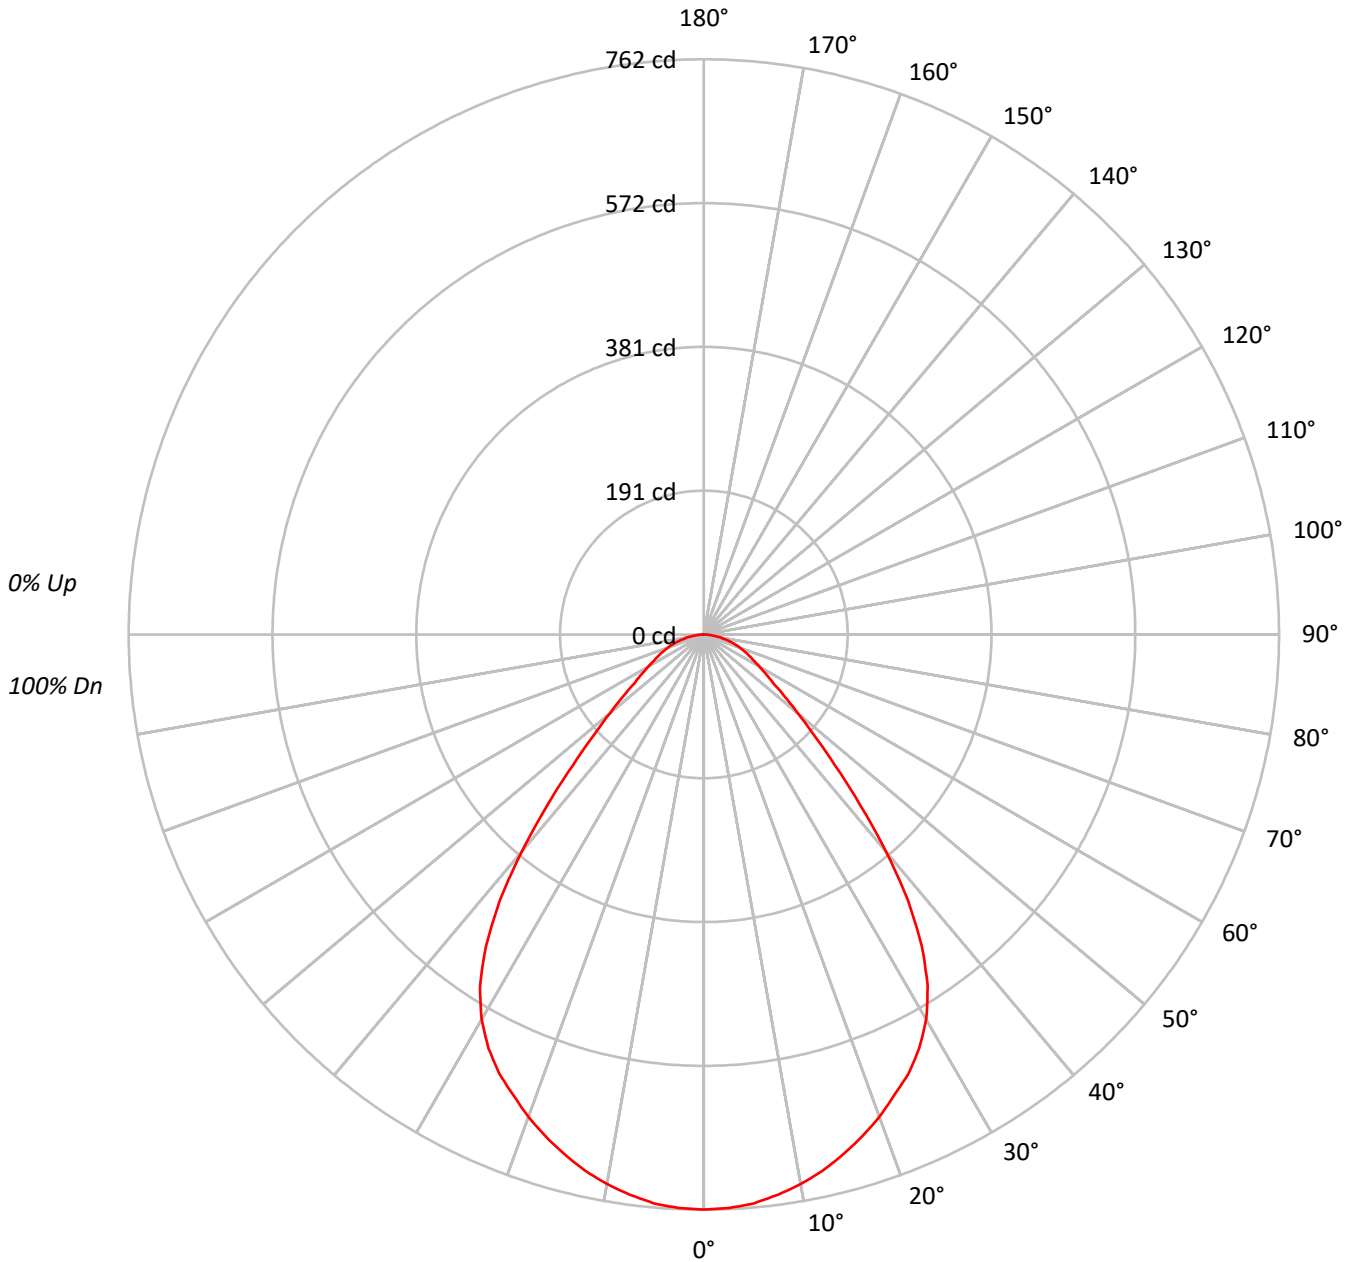



TEST NUMBER: P641621

CATALOG NUMBER: ML5612LSVWFL97FS1E - 592W - 1200LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89																			
2	103	97	91	87	101	95	90	86	92	88	84	89	85	82	86	83	80	78																			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70																			
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	68	64	62																			
5	84	73	65	60	82	72	65	59	70	64	59	68	62	58	66	61	58	56																			
6	78	67	59	54	76	66	59	53	64	58	53	63	57	53	61	56	52	50																			
7	73	61	54	49	72	61	54	48	59	53	48	58	52	48	57	52	48	46																			
8	69	57	49	44	67	56	49	44	55	49	44	54	48	44	53	47	44	42																			
9	65	53	46	41	63	52	45	41	51	45	40	50	44	40	49	44	40	38																			
10	61	49	42	37	60	49	42	37	48	41	37	47	41	37	46	41	37	35																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	41767
5°	41635
10°	41159
15°	40466
20°	39670
25°	38815
30°	37278
35°	33669
40°	26836
45°	19041
50°	13850
55°	10724
60°	9265
65°	8561
70°	8046
75°	7562
80°	6661
85°	4969

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19041 cd/sqm



TEST NUMBER: P641621

CATALOG NUMBER: ML5612LSVWFL97FS1E - 592W - 1200LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	71.6	5.6
10°-20°	200.9	15.6
20°-30°	294.4	22.9
30°-40°	308.4	24.0
40°-50°	195.0	15.1
50°-60°	104.3	8.1
60°-70°	65.6	5.1
70°-80°	37.6	2.9
80°-90°	9.7	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	566.9	44.0
0°-40°	875.4	68.0
0°-60°	1174.7	91.2
0°-90°	1287.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1287.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	762	
5°	757	72
15°	713	201
25°	642	294
35°	503	308
45°	246	195
55°	112	104
65°	66	66
75°	36	38
85°	8	10
90°	0	



TEST NUMBER: P641621

CATALOG NUMBER: ML5612LSVWFL97FS1E - 592W - 1200LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	761.9
2.5°	760.5
5°	756.6
7.5°	748.7
10°	739.4
12.5°	727.5
15°	713.0
17.5°	697.2
20°	680.0
22.5°	660.2
25°	641.7
27.5°	617.9
30°	588.9
32.5°	551.9
35°	503.1
37.5°	443.7
40°	375.0
42.5°	306.3
45°	245.6
47.5°	198.1
50°	162.4
52.5°	134.7
55°	112.2
57.5°	97.7
60°	84.5
62.5°	73.9
65°	66.0
67.5°	58.1
70°	50.2
72.5°	43.6
75°	35.7
77.5°	27.7
80°	21.1
82.5°	14.5
85°	7.9
87.5°	2.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)