

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641655

Luminaire Tested: ML5612LSVWFL97FS1E - 593SNB - 1200LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641655  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-99)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL97FS1E - 593SNB - 1200LM - 5000K  
Description: ML56 RR, MILKY OPTIC, 5" SATIN NICKLE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1259.6 lumens  
Efficiency: N/A  
Efficacy: 76.3 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.14  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641655

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 1200LM - 5000K

### Luminous Intensity Polar Plot

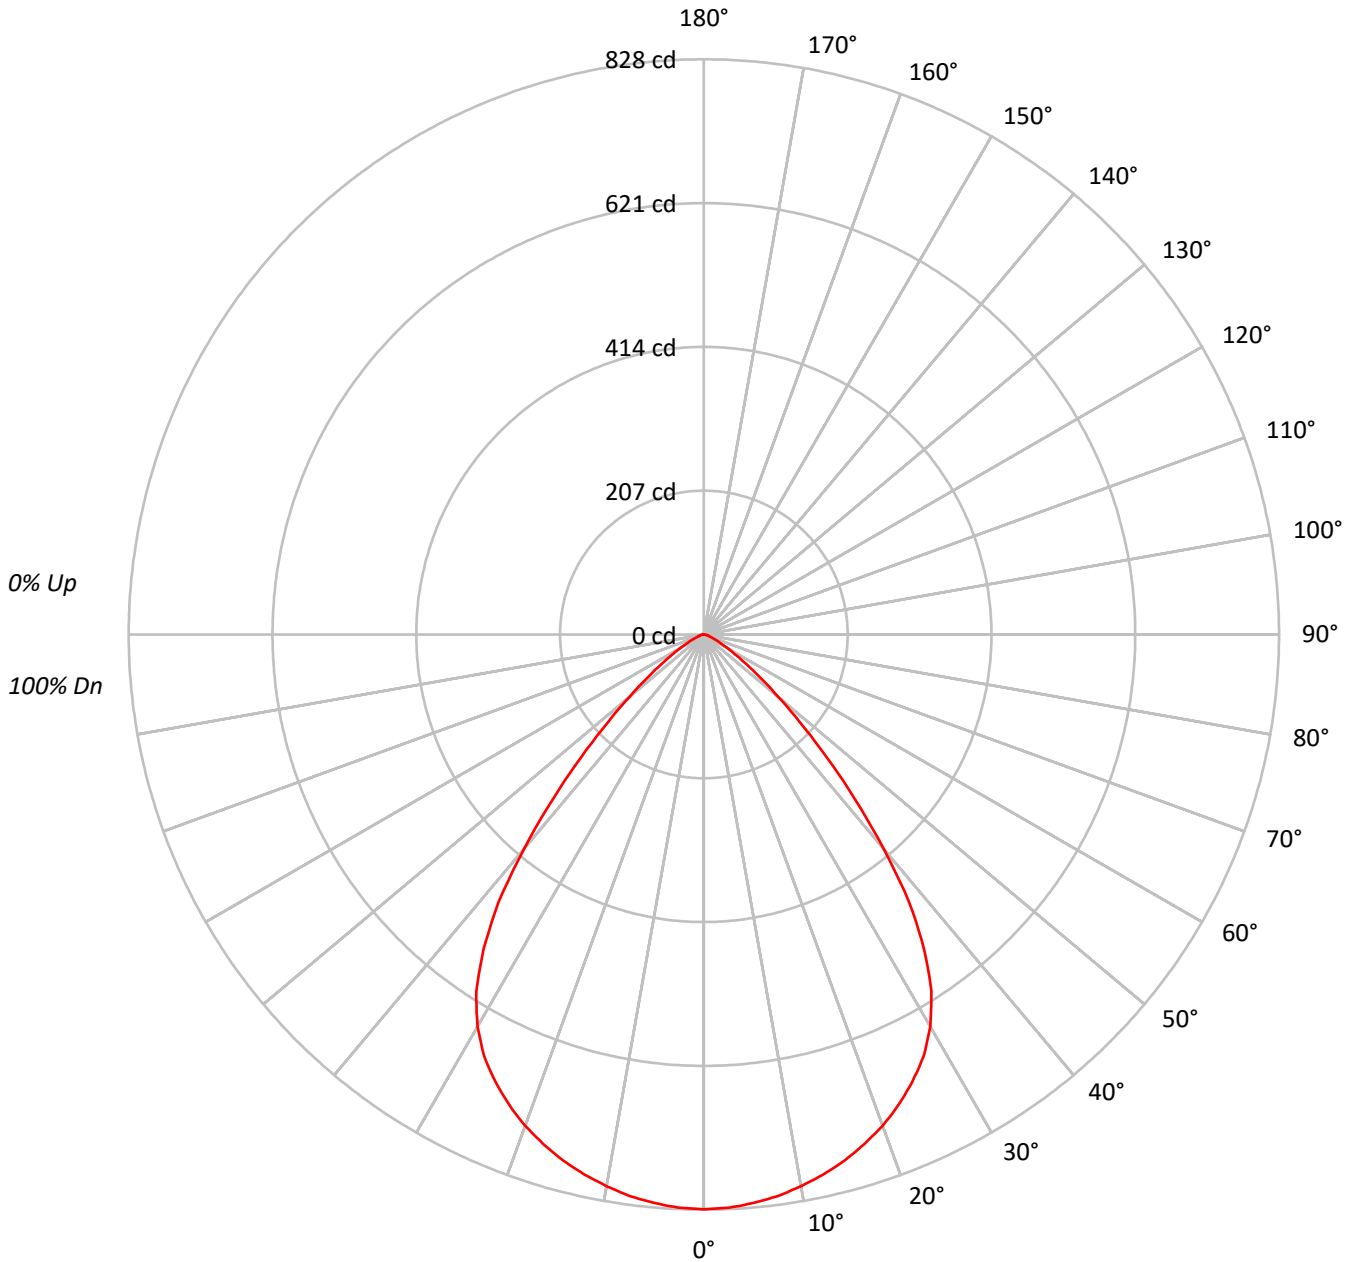



TEST NUMBER: P641655

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 1200LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82																			
3	99	91	85	81	97	90	84	80	87	82	79	84	81	77	82	79	76	74																			
4	93	84	77	72	91	82	76	72	80	75	71	78	73	70	76	72	69	67																			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61																			
6	81	71	64	59	80	70	63	58	68	62	58	67	62	58	65	61	57	55																			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51																			
8	72	61	54	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																			
9	68	56	50	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43																			
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	65324
5°	65098
10°	64640
15°	64065
20°	63207
25°	61868
30°	59414
35°	53254
40°	41478
45°	27832
50°	17157
55°	10336
60°	6157
65°	3642
70°	2077
75°	1830
80°	1364
85°	1359

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 27832 cd/sqm



TEST NUMBER: P641655

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 1200LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.0	6.2
10°-20°	220.9	17.5
20°-30°	326.1	25.9
30°-40°	338.5	26.9
40°-50°	196.5	15.6
50°-60°	71.4	5.7
60°-70°	20.7	1.6
70°-80°	6.3	0.5
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	625.0	49.6
0°-40°	963.5	76.5
0°-60°	1231.4	97.8
0°-90°	1259.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1259.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	828	
5°	822	78
15°	784	221
25°	710	326
35°	553	338
45°	249	197
55°	75	71
65°	20	21
75°	6	6
85°	2	1
90°	0	



TEST NUMBER: P641655

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 1200LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	827.5
2.5°	826.0
5°	821.5
7.5°	815.4
10°	806.4
12.5°	795.9
15°	783.9
17.5°	768.9
20°	752.4
22.5°	732.8
25°	710.3
27.5°	684.8
30°	651.8
32.5°	609.7
35°	552.6
37.5°	485.1
40°	402.5
42.5°	321.4
45°	249.3
47.5°	187.7
50°	139.7
52.5°	103.6
55°	75.1
57.5°	54.1
60°	39.0
62.5°	27.0
65°	19.5
67.5°	13.5
70°	9.0
72.5°	7.5
75°	6.0
77.5°	4.5
80°	3.0
82.5°	1.5
85°	1.5
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)