

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641676

Luminaire Tested: ML5612LSVWFL97FS1E - 593TBZB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641676
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-100)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 593TBZB - 900LM - 2700K
Description: ML56 RR, MILKY OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 800.9 lumens
Efficiency: N/A
Efficacy: 60.2 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.12
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641676
CATALOG NUMBER: ML5612LSVWFL97FS1E - 593TBZB - 900LM - 2700K

Luminous Intensity Polar Plot

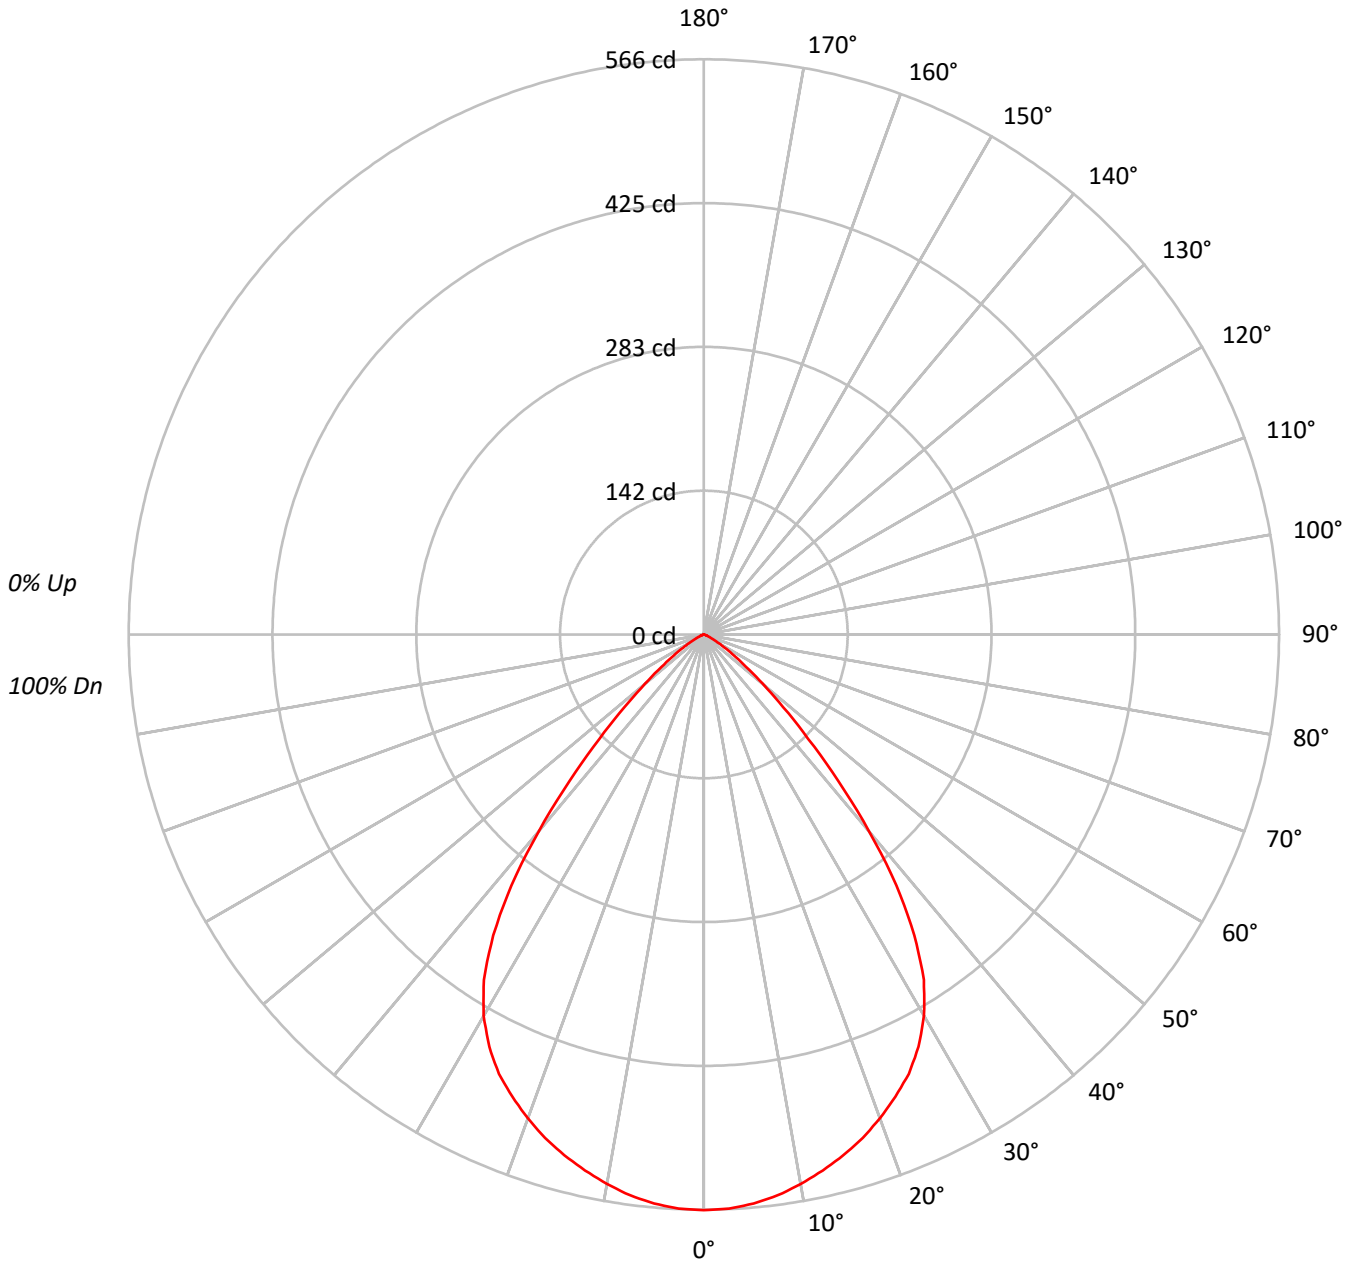



TEST NUMBER: P641676

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593TBZB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92																			
2	106	101	96	92	104	99	95	91	96	92	89	92	90	87	90	87	85	84																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	85	79	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69																			
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63																			
6	83	72	65	61	81	71	65	60	70	64	60	68	63	59	67	62	59	57																			
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	53																			
8	73	62	55	51	72	62	55	51	60	55	50	59	54	50	58	53	50	48																			
9	69	58	51	47	68	57	51	47	56	51	46	55	50	46	55	50	46	45																			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	44720
5°	44542
10°	44007
15°	43355
20°	42550
25°	41547
30°	39497
35°	34818
40°	26092
45°	16210
50°	9248
55°	4955
60°	2416
65°	1027
70°	508
75°	336
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16210 cd/sqm



TEST NUMBER: P641676

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593TBZB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.2	6.6
10°-20°	149.5	18.7
20°-30°	218.5	27.3
30°-40°	220.5	27.5
40°-50°	116.4	14.5
50°-60°	34.9	4.4
60°-70°	6.7	0.8
70°-80°	1.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	421.2	52.6
0°-40°	641.8	80.1
0°-60°	793.0	99.0
0°-90°	800.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	566	
5°	562	53
15°	530	149
25°	477	218
35°	361	221
45°	145	116
55°	36	35
65°	6	7
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641676

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593TBZB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	566.5
2.5°	565.4
5°	562.1
7.5°	556.7
10°	549.0
12.5°	540.3
15°	530.5
17.5°	519.6
20°	506.5
22.5°	492.3
25°	477.0
27.5°	457.3
30°	433.3
32.5°	402.8
35°	361.3
37.5°	311.1
40°	253.2
42.5°	195.4
45°	145.2
47.5°	105.9
50°	75.3
52.5°	52.4
55°	36.0
57.5°	24.0
60°	15.3
62.5°	9.8
65°	5.5
67.5°	3.3
70°	2.2
72.5°	1.1
75°	1.1
77.5°	1.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)