

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641692

Luminaire Tested: ML5612LSVWFL97FS1E - 593WB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641692
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-97)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 593WB - 900LM - 3000K
Description: ML56 RR, MILKY OPTIC, 5" WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1087.2 lumens
Efficiency: N/A
Efficacy: 81.7 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.14
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641692
CATALOG NUMBER: ML5612LSVWFL97FS1E - 593WB - 900LM - 3000K

Luminous Intensity Polar Plot

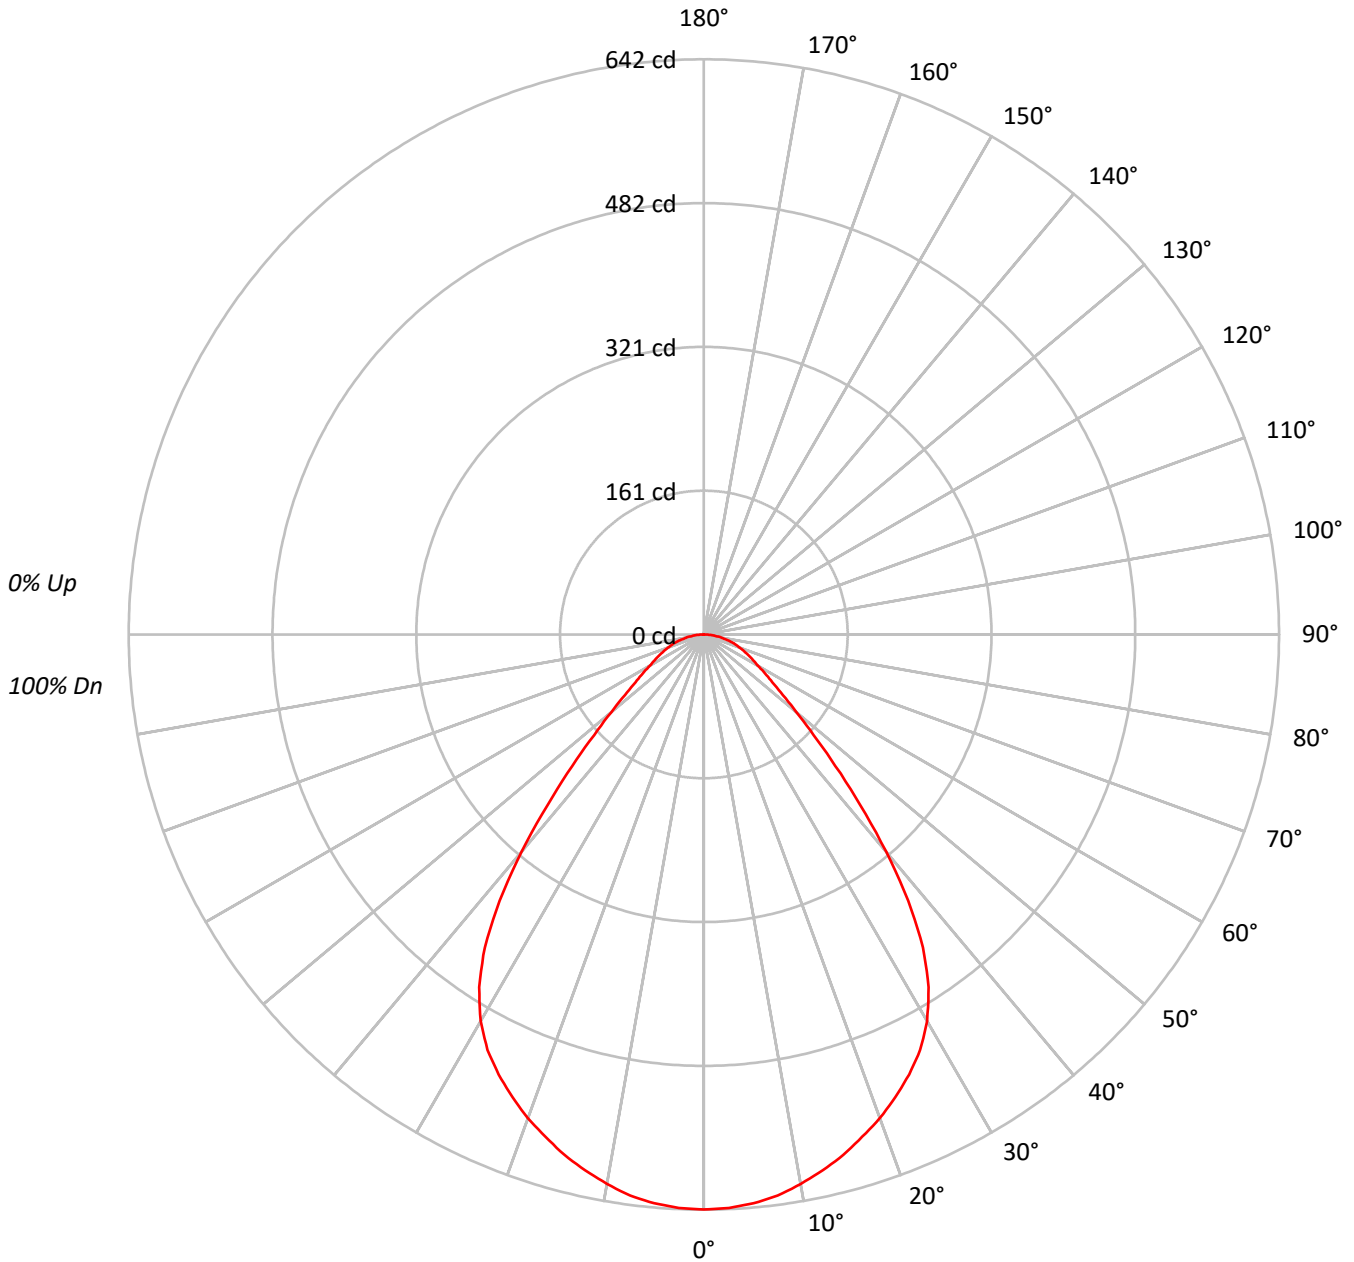



TEST NUMBER: P641692

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593WB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89																			
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78																			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	69																			
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	67	64	62																			
5	84	73	65	60	82	72	65	59	70	63	59	68	62	58	66	61	58	56																			
6	78	67	59	54	76	66	59	53	64	58	53	63	57	53	61	56	52	50																			
7	73	61	54	49	72	61	54	48	59	53	48	58	52	48	57	51	48	46																			
8	69	57	49	44	67	56	49	44	55	49	44	54	48	44	53	47	43	42																			
9	65	53	45	41	63	52	45	41	51	45	40	50	44	40	49	44	40	38																			
10	61	49	42	37	60	49	42	37	48	41	37	47	41	37	46	41	37	35																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50664
5°	50501
10°	49915
15°	49150
20°	48262
25°	47200
30°	45412
35°	41092
40°	32605
45°	23176
50°	16530
55°	12813
60°	10989
65°	10273
70°	9832
75°	9577
80°	9183
85°	8152

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23176 cd/sqm



TEST NUMBER: P641692

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593WB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.4	5.6
10°-20°	169.4	15.6
20°-30°	248.9	22.9
30°-40°	260.9	24.0
40°-50°	164.0	15.1
50°-60°	86.3	7.9
60°-70°	54.7	5.0
70°-80°	32.8	3.0
80°-90°	9.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	478.7	44.0
0°-40°	739.6	68.0
0°-60°	989.9	91.1
0°-90°	1087.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1087.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	642	
5°	637	60
15°	601	169
25°	542	249
35°	426	261
45°	208	164
55°	93	86
65°	55	55
75°	31	33
85°	9	10
90°	0	



TEST NUMBER: P641692

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593WB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	641.8
2.5°	640.7
5°	637.3
7.5°	631.7
10°	622.7
12.5°	612.6
15°	601.4
17.5°	587.9
20°	574.5
22.5°	558.8
25°	541.9
27.5°	522.9
30°	498.2
32.5°	466.8
35°	426.4
37.5°	374.8
40°	316.4
42.5°	258.1
45°	207.6
47.5°	166.1
50°	134.6
52.5°	111.1
55°	93.1
57.5°	80.8
60°	69.6
62.5°	61.7
65°	55.0
67.5°	48.2
70°	42.6
72.5°	37.0
75°	31.4
77.5°	24.7
80°	20.2
82.5°	13.5
85°	9.0
87.5°	3.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)