

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641731

Luminaire Tested: ML5612LSVWFL97FS1E - 594WB - 600LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641731  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-101)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL97FS1E - 594WB - 600LM - 2700K  
Description: ML56 RR, MILKY OPTIC, 5" WHITE GIMBAL TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 932.9 lumens  
Efficiency: N/A  
Efficacy: 90.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.28  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641731  
CATALOG NUMBER: ML5612LSVWFL97FS1E - 594WB - 600LM - 2700K

### Luminous Intensity Polar Plot

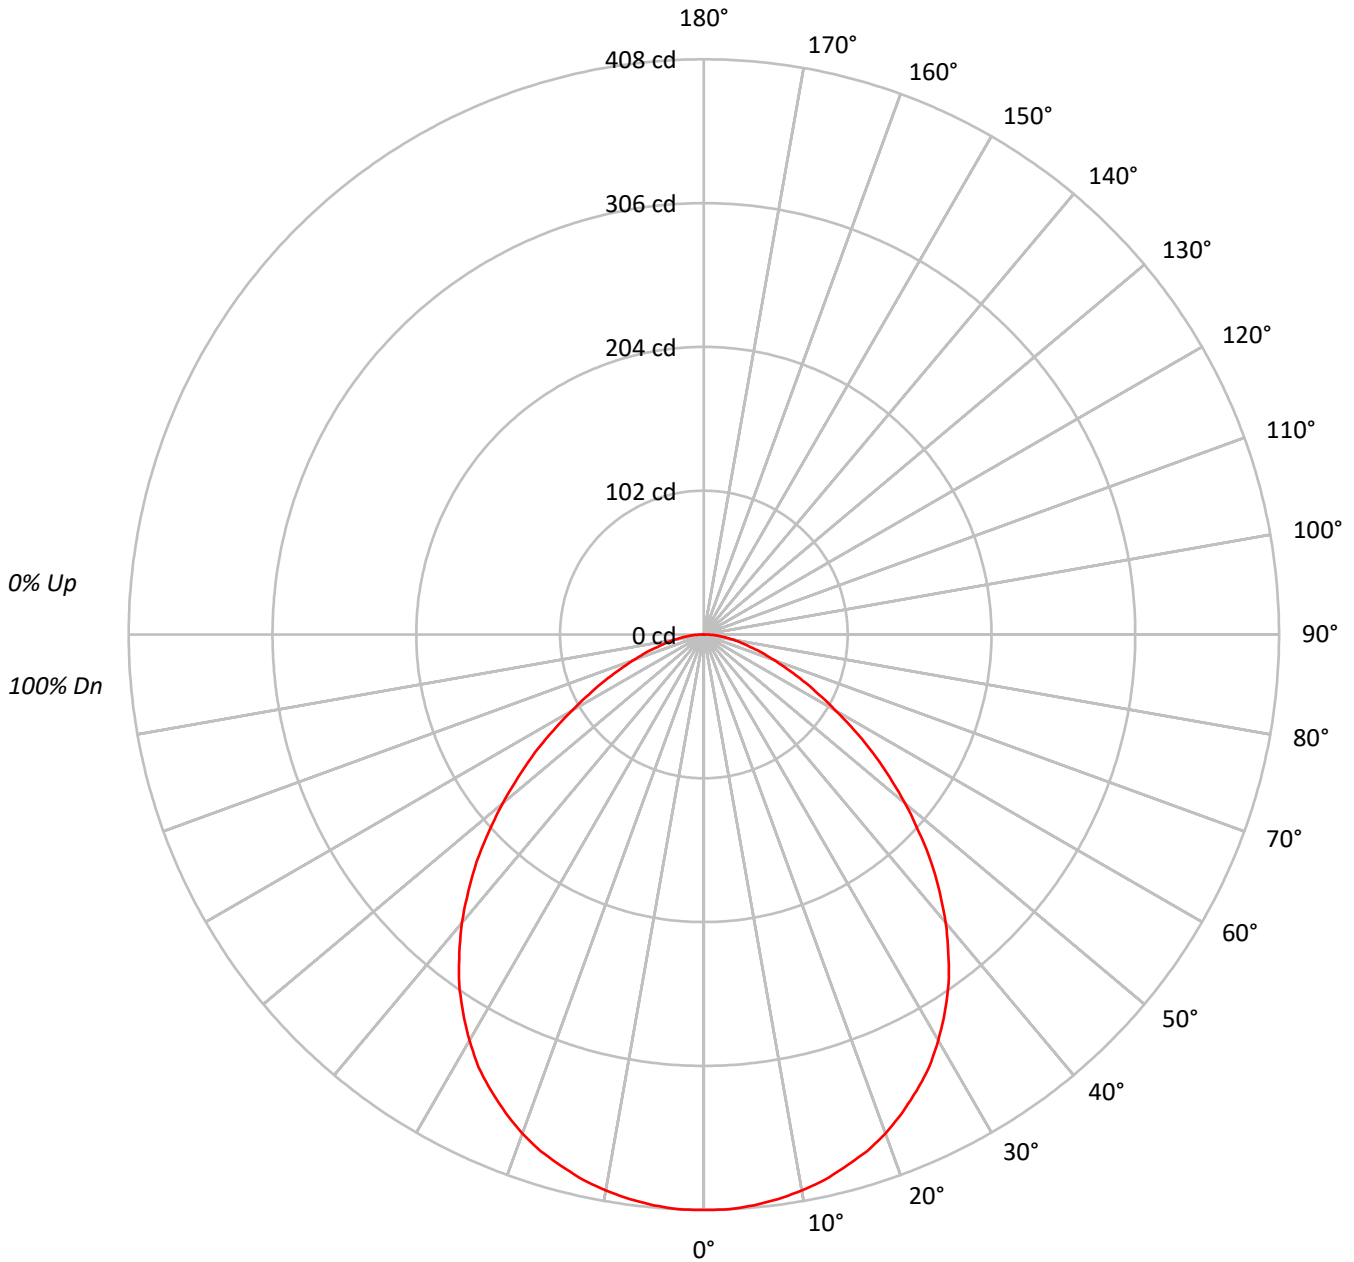



TEST NUMBER: P641731

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594WB - 600LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86																			
2	101	94	88	82	99	92	86	82	88	84	80	85	81	78	82	79	76	74																			
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	70	66	64																			
4	86	75	67	60	84	73	66	60	71	64	59	69	63	58	67	62	58	56																			
5	79	67	59	53	77	66	58	53	64	57	52	62	56	51	60	55	51	49																			
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43																			
7	68	56	47	42	67	55	47	41	53	46	41	52	46	41	51	45	41	39																			
8	64	51	43	37	62	50	43	37	49	42	37	48	41	37	47	41	37	35																			
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	37	33	31																			
10	56	43	36	31	55	43	36	31	42	35	31	41	35	31	40	34	30	29																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	32224
5°	32212
10°	32104
15°	31898
20°	31646
25°	31104
30°	30308
35°	29171
40°	27514
45°	25443
50°	22867
55°	20135
60°	17051
65°	14458
70°	12164
75°	10370
80°	9274
85°	8514

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 25443 cd/sqm



TEST NUMBER: P641731

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594WB - 600LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	38.6	4.1
10°-20°	110.2	11.8
20°-30°	164.3	17.6
30°-40°	188.5	20.2
40°-50°	175.0	18.8
50°-60°	130.7	14.0
60°-70°	77.4	8.3
70°-80°	37.2	4.0
80°-90°	10.9	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	313.1	33.6
0°-40°	501.6	53.8
0°-60°	807.4	86.5
0°-90°	932.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	932.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	408	
5°	406	39
15°	390	110
25°	357	164
35°	303	188
45°	228	175
55°	146	131
65°	77	77
75°	34	37
85°	9	11
90°	0	



TEST NUMBER: P641731

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594WB - 600LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	408.2
2.5°	408.2
5°	406.5
7.5°	403.9
10°	400.5
12.5°	396.3
15°	390.3
17.5°	384.4
20°	376.7
22.5°	367.3
25°	357.1
27.5°	346.1
30°	332.5
32.5°	318.0
35°	302.7
37.5°	284.9
40°	267.0
42.5°	247.4
45°	227.9
47.5°	206.6
50°	186.2
52.5°	165.8
55°	146.3
57.5°	126.7
60°	108.0
62.5°	91.8
65°	77.4
67.5°	63.8
70°	52.7
72.5°	43.4
75°	34.0
77.5°	27.2
80°	20.4
82.5°	14.5
85°	9.4
87.5°	6.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)