

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641771

Luminaire Tested: ML5612LSVWFL97FS1E - 692H - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641771
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-107)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 692H - 1200LM - 2700K
Description: ML56 RR, MILKY OPTIC, 6" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1287.7 lumens
Efficiency: N/A
Efficacy: 78.0 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.1
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641771

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692H - 1200LM - 2700K

Luminous Intensity Polar Plot

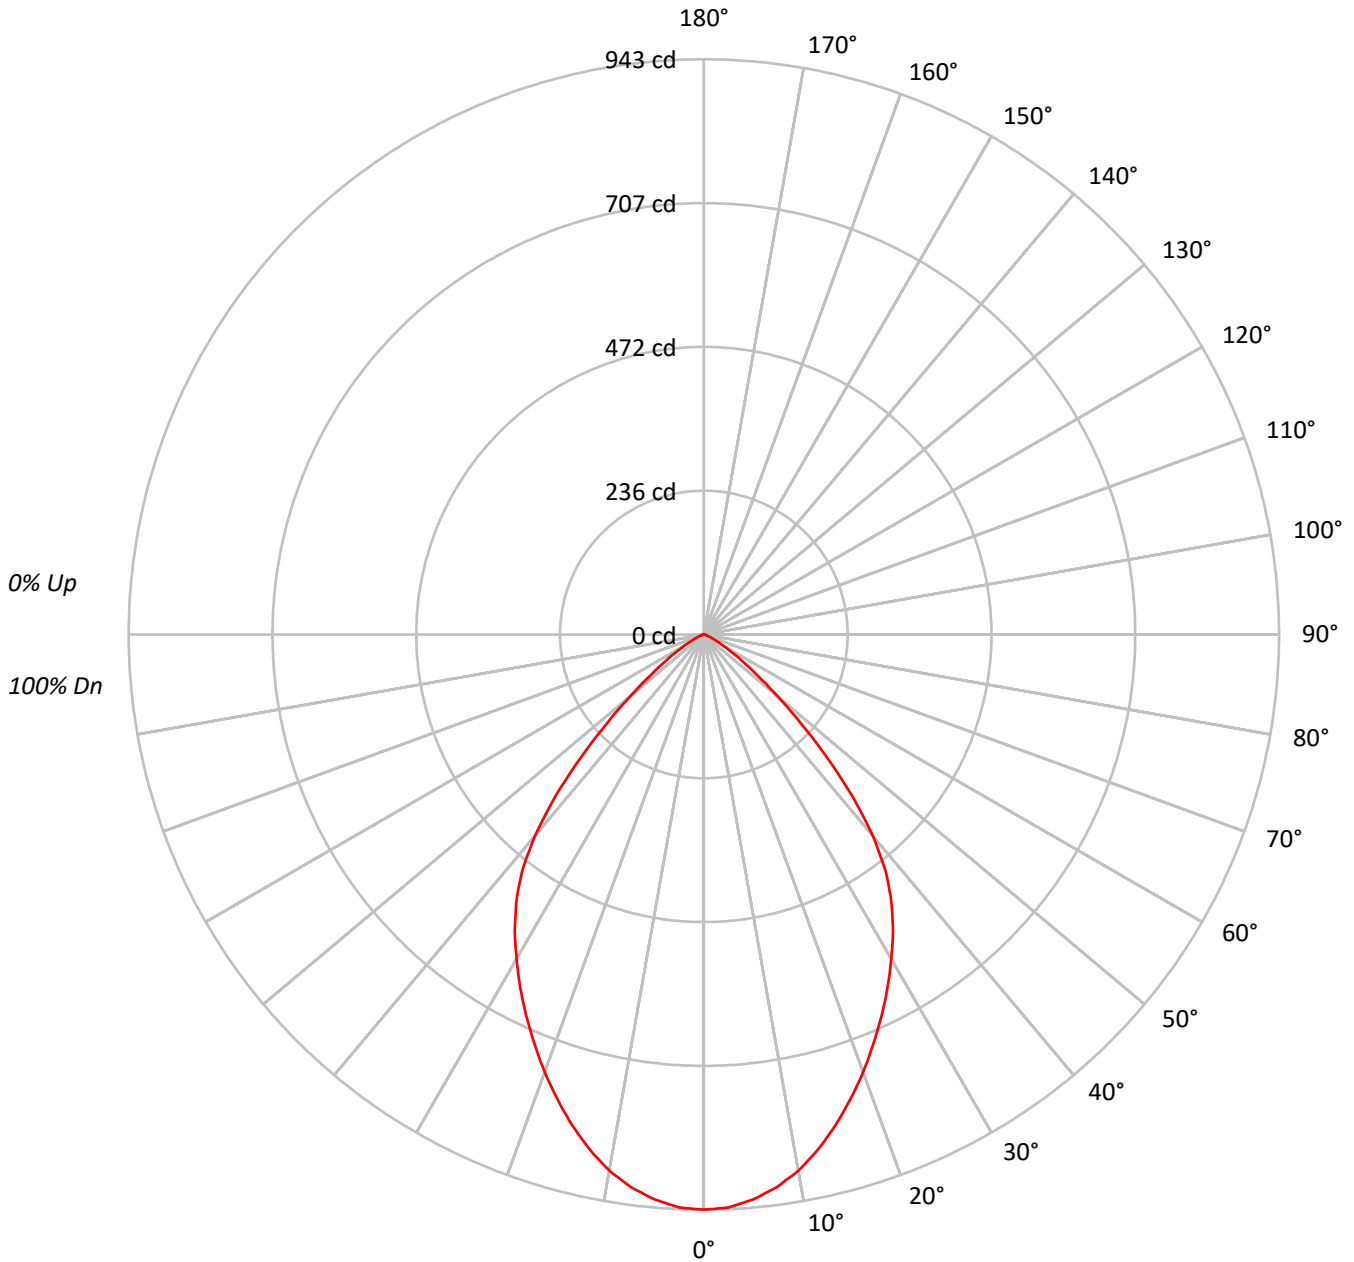



TEST NUMBER: P641771

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692H - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83																			
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75																			
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	72	69	67																			
5	87	77	70	65	85	76	70	65	74	68	64	72	67	64	71	66	63	61																			
6	81	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	57	56																			
7	77	66	59	54	75	65	58	54	64	58	53	62	57	53	61	56	53	51																			
8	72	61	54	49	71	60	54	49	59	53	49	58	53	49	57	52	48	47																			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43																			
10	64	53	46	42	63	52	46	42	52	46	42	51	45	41	50	45	41	40																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	51690
5°	51161
10°	49693
15°	47293
20°	44530
25°	41694
30°	38867
35°	35877
40°	30808
45°	22111
50°	13398
55°	7570
60°	4057
65°	1881
70°	1058
75°	847
80°	410
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22111 cd/sqm



TEST NUMBER: P641771

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692H - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.6	6.8
10°-20°	233.8	18.2
20°-30°	317.0	24.6
30°-40°	331.6	25.8
40°-50°	220.6	17.1
50°-60°	75.8	5.9
60°-70°	17.0	1.3
70°-80°	3.8	0.3
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	638.3	49.6
0°-40°	969.9	75.3
0°-60°	1266.3	98.3
0°-90°	1287.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1287.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	943	
5°	930	88
15°	833	234
25°	689	317
35°	536	332
45°	285	221
55°	79	76
65°	14	17
75°	4	4
85°	0	1
90°	0	



TEST NUMBER: P641771

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692H - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	942.9
2.5°	940.2
5°	929.7
7.5°	913.8
10°	892.7
12.5°	864.9
15°	833.3
17.5°	798.9
20°	763.3
22.5°	726.3
25°	689.3
27.5°	652.3
30°	614.0
32.5°	577.1
35°	536.1
37.5°	489.9
40°	430.5
42.5°	360.5
45°	285.2
47.5°	215.2
50°	157.1
52.5°	112.2
55°	79.2
57.5°	54.1
60°	37.0
62.5°	23.8
65°	14.5
67.5°	9.2
70°	6.6
72.5°	4.0
75°	4.0
77.5°	2.6
80°	1.3
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)