

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641794

Luminaire Tested: ML5612LSVWFL97FS1E - 692SC - 600LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641794
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-106)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 692SC - 600LM - 4000K
Description: ML56 RR, MILKY OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1001.5 lumens
Efficiency: N/A
Efficacy: 97.2 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641794

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 4000K

Luminous Intensity Polar Plot

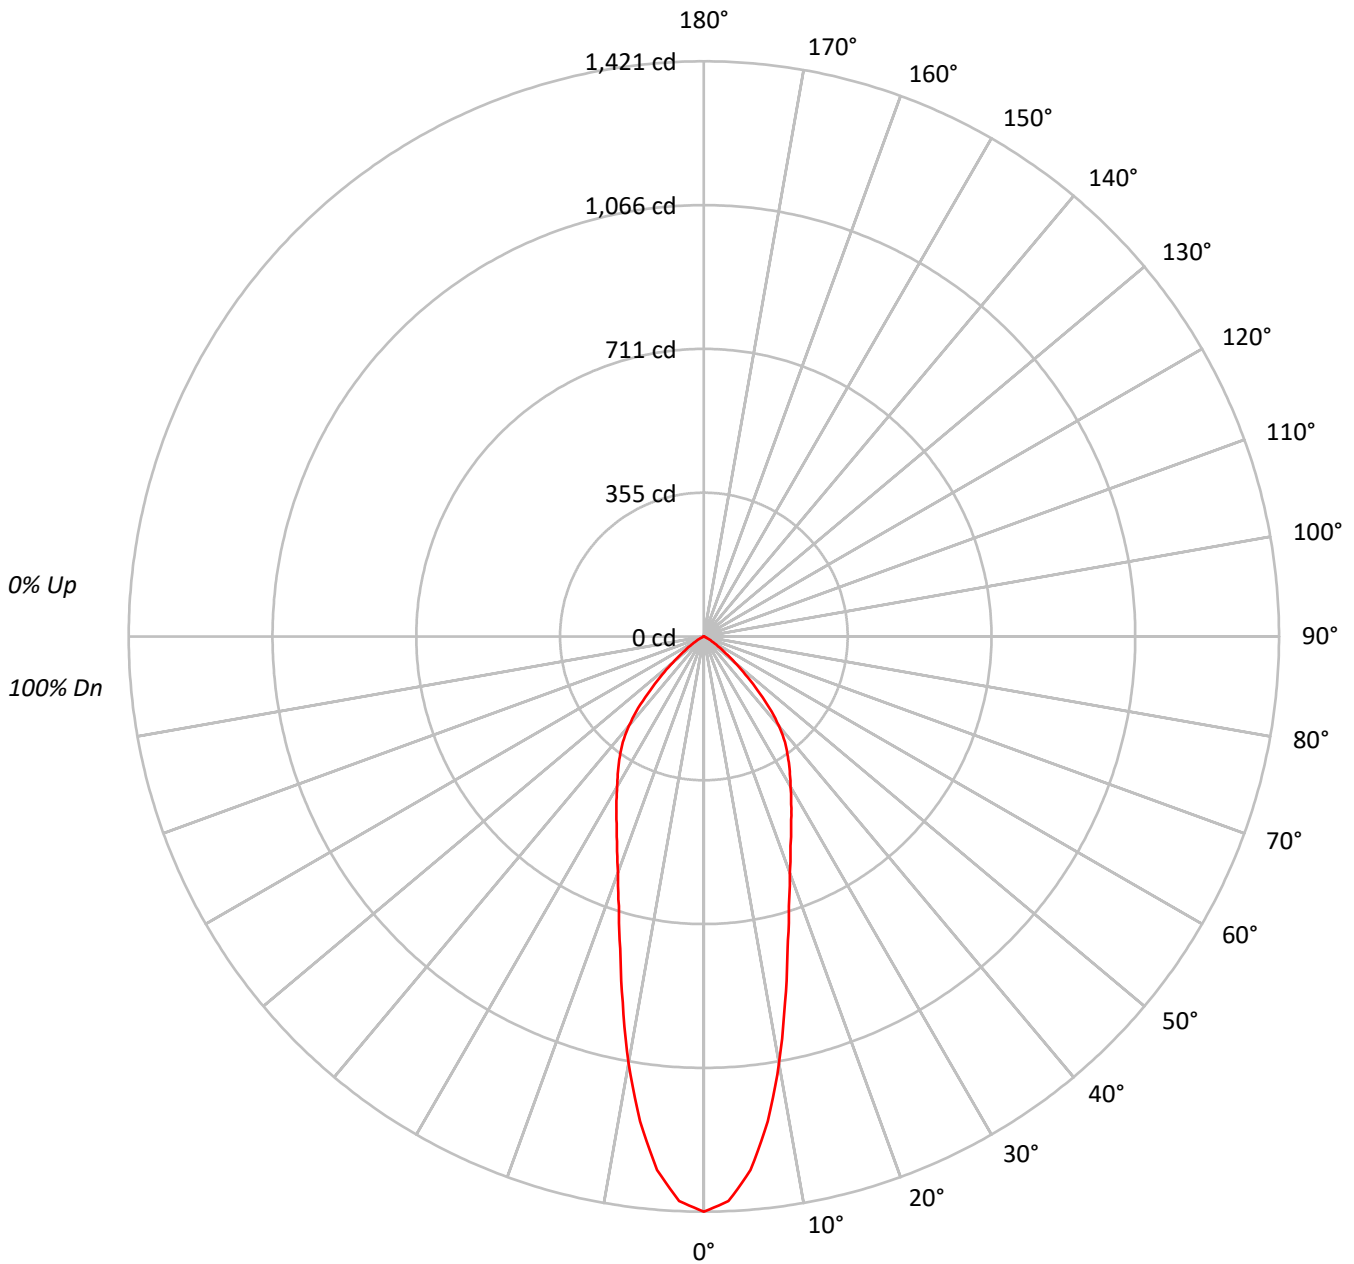



TEST NUMBER: P641794

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	93	105	100	96	92	97	93	90	93	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78																			
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49																			
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77905
5°	72826
10°	59562
15°	45295
20°	36176
25°	30836
30°	27131
35°	24213
40°	20632
45°	14552
50°	8494
55°	4435
60°	2017
65°	623
70°	160
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14552 cd/sqm



TEST NUMBER: P641794

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.1	11.8
10°-20°	225.0	22.5
20°-30°	236.0	23.6
30°-40°	225.1	22.5
40°-50°	145.3	14.5
50°-60°	45.1	4.5
60°-70°	6.6	0.7
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	579.1	57.8
0°-40°	804.2	80.3
0°-60°	994.5	99.3
0°-90°	1001.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1001.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1421	
5°	1323	118
15°	798	225
25°	510	236
35°	362	225
45°	188	145
55°	46	45
65°	5	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641794

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1421.1
2.5°	1396.0
5°	1323.4
7.5°	1208.3
10°	1070.0
12.5°	925.8
15°	798.1
17.5°	698.5
20°	620.1
22.5°	560.1
25°	509.8
27.5°	467.3
30°	428.6
32.5°	394.7
35°	361.8
37.5°	328.9
40°	288.3
42.5°	239.9
45°	187.7
47.5°	139.3
50°	99.6
52.5°	68.7
55°	46.4
57.5°	30.0
60°	18.4
62.5°	10.6
65°	4.8
67.5°	1.9
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)