

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641795

Luminaire Tested: ML5612LSVWFL97FS1E - 692SC - 600LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641795  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-106)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL97FS1E - 692SC - 600LM - 5000K  
Description: ML56 RR, MILKY OPTIC, 6" SPECULAR CLEAR TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1001.9 lumens  
Efficiency: N/A  
Efficacy: 97.3 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.69  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641795  
CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 5000K

### Luminous Intensity Polar Plot

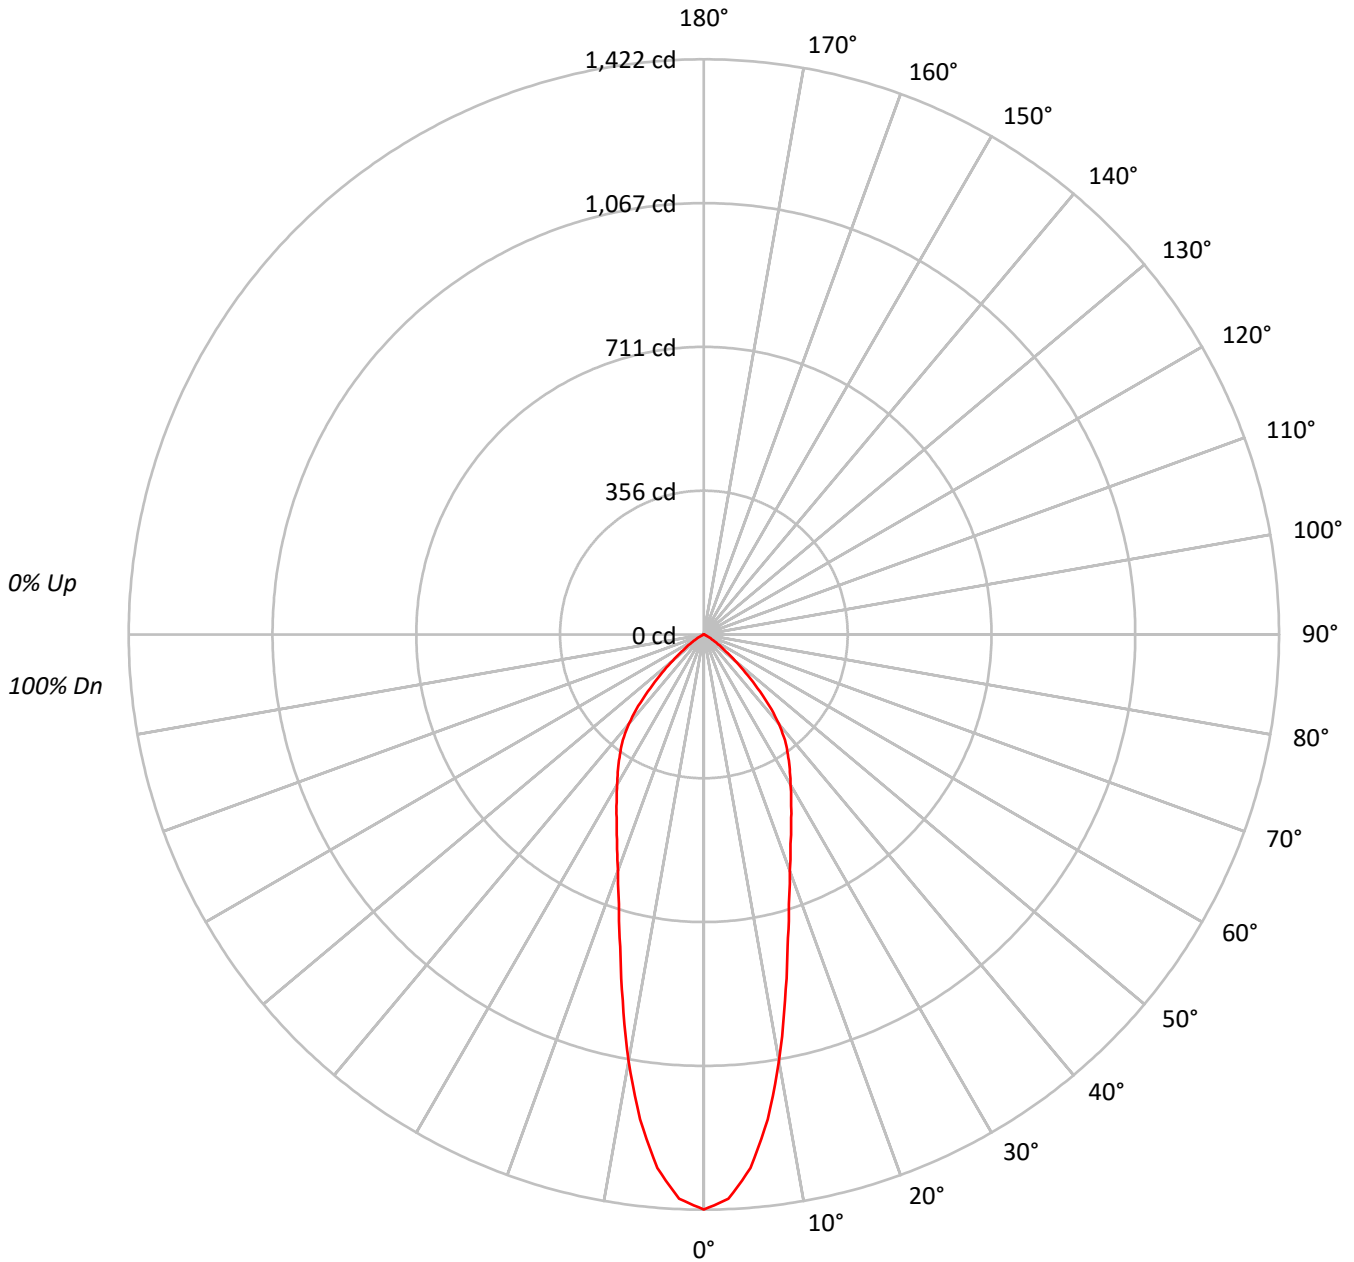



TEST NUMBER: P641795

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	93	105	100	96	92	97	93	90	93	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78																
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71			71																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	70	67	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	58	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49			49																
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	77938
5°	72854
10°	59585
15°	45312
20°	36193
25°	30849
30°	27137
35°	24226
40°	20639
45°	14560
50°	8503
55°	4444
60°	2017
65°	623
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14560 cd/sqm



TEST NUMBER: P641795

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	118.1	11.8
10°-20°	225.1	22.5
20°-30°	236.1	23.6
30°-40°	225.2	22.5
40°-50°	145.3	14.5
50°-60°	45.1	4.5
60°-70°	6.6	0.7
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	579.3	57.8
0°-40°	804.5	80.3
0°-60°	995.0	99.3
0°-90°	1001.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1001.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1422	
5°	1324	118
15°	798	225
25°	510	236
35°	362	225
45°	188	145
55°	46	45
65°	5	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641795

CATALOG NUMBER: ML5612LSVWFL97FS1E - 692SC - 600LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1421.7
2.5°	1396.5
5°	1323.9
7.5°	1208.8
10°	1070.4
12.5°	926.2
15°	798.4
17.5°	698.7
20°	620.4
22.5°	560.4
25°	510.0
27.5°	467.4
30°	428.7
32.5°	394.9
35°	362.0
37.5°	329.0
40°	288.4
42.5°	240.0
45°	187.8
47.5°	139.4
50°	99.7
52.5°	68.7
55°	46.5
57.5°	30.0
60°	18.4
62.5°	10.6
65°	4.8
67.5°	1.9
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)