

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641816

Luminaire Tested: ML5612LSVWFL97FS1E - 693BB - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641816
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-110)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 693BB - 1200LM - 2700K
Description: ML56 RR, MILKY OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1023.8 lumens
Efficiency: N/A
Efficacy: 62.0 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.21
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641816
CATALOG NUMBER: ML5612LSVWFL97FS1E - 693BB - 1200LM - 2700K

Luminous Intensity Polar Plot

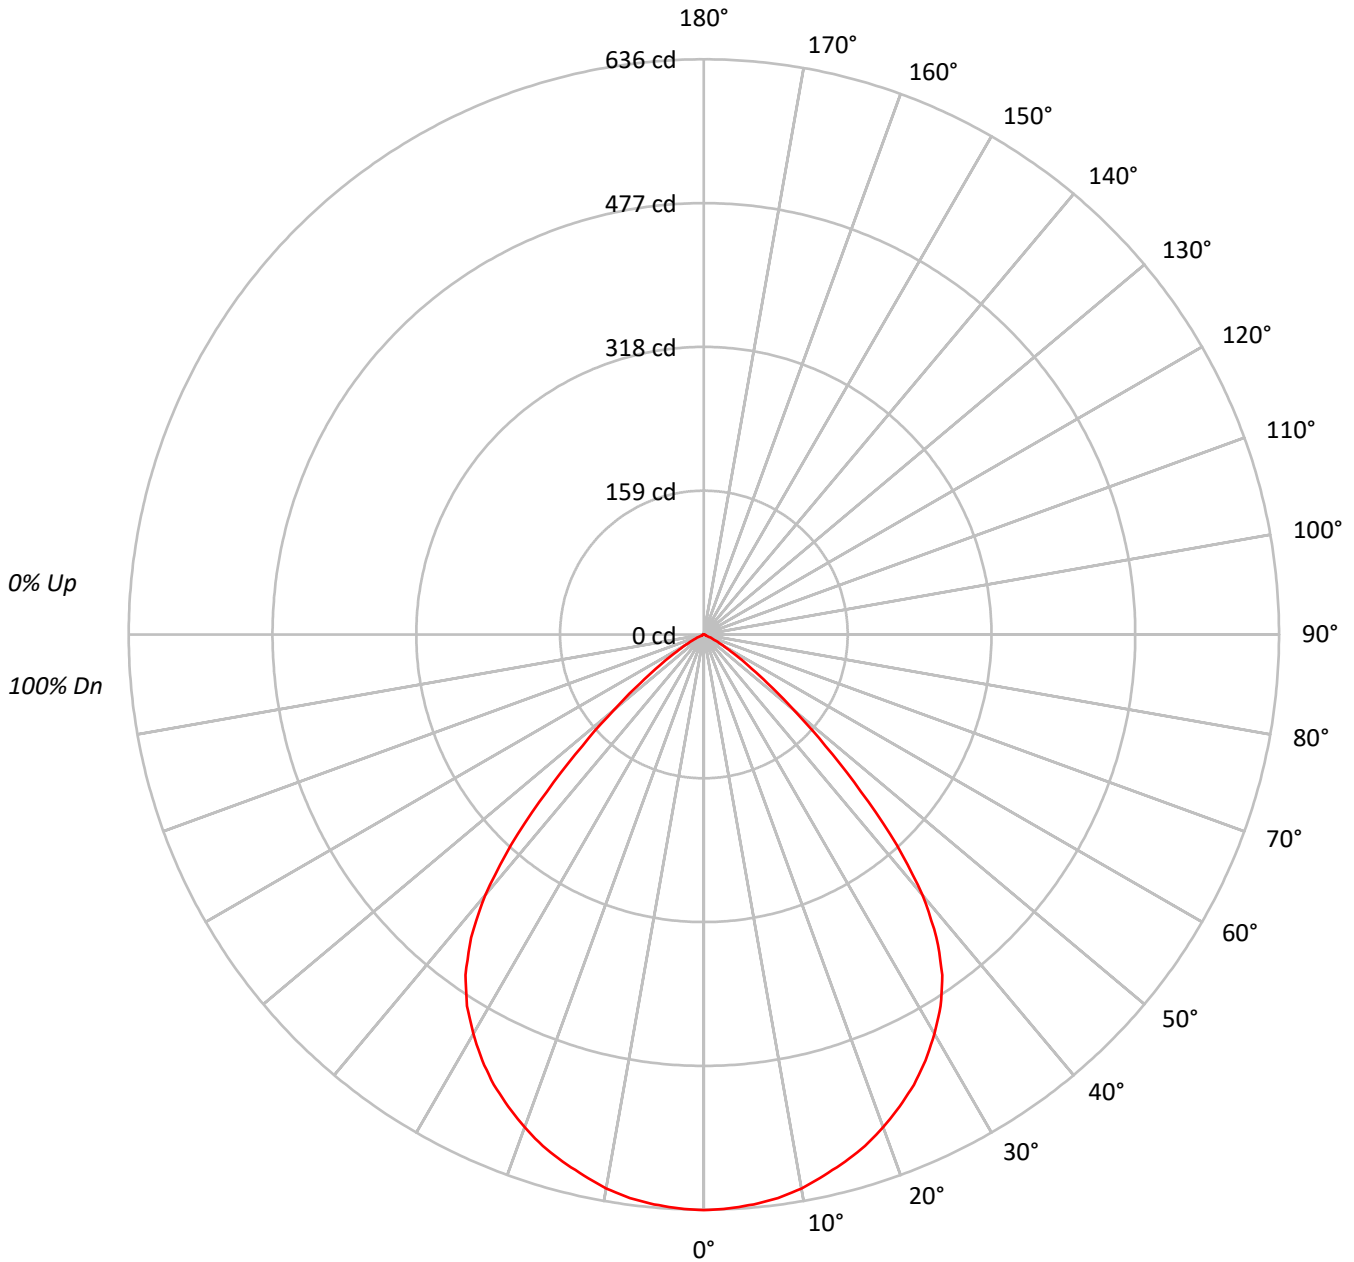



TEST NUMBER: P641816
 CATALOG NUMBER: ML5612LSVWFL97FS1E - 693BB - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91				
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83				
3	99	91	85	81	97	90	84	80	87	82	79	84	81	77	82	79	76	74				
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67				
5	86	77	70	64	85	76	69	64	74	68	63	72	67	63	70	66	62	61				
6	81	70	63	58	79	70	63	58	68	62	57	66	61	57	65	60	57	55				
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50				
8	71	60	53	48	70	59	53	48	58	52	48	57	52	48	56	51	47	46				
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	43	42				
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34893
5°	34812
10°	34624
15°	34251
20°	33819
25°	33232
30°	32264
35°	30758
40°	26936
45°	19041
50°	11036
55°	5677
60°	2609
65°	856
70°	208
75°	275
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19041 cd/sqm



TEST NUMBER: P641816

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693BB - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.1	5.9
10°-20°	170.2	16.6
20°-30°	252.5	24.7
30°-40°	283.1	27.6
40°-50°	190.2	18.6
50°-60°	58.1	5.7
60°-70°	8.5	0.8
70°-80°	1.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	482.8	47.2
0°-40°	765.8	74.8
0°-60°	1014.1	99.0
0°-90°	1023.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1023.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	636	
5°	633	60
15°	604	170
25°	549	253
35°	460	283
45°	246	190
55°	59	58
65°	7	9
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641816

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693BB - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	636.5
2.5°	635.2
5°	632.6
7.5°	628.6
10°	622.0
12.5°	612.8
15°	603.5
17.5°	592.9
20°	579.7
22.5°	565.2
25°	549.4
27.5°	530.9
30°	509.7
32.5°	487.3
35°	459.6
37.5°	422.6
40°	376.4
42.5°	315.6
45°	245.6
47.5°	182.2
50°	129.4
52.5°	88.5
55°	59.4
57.5°	38.3
60°	23.8
62.5°	13.2
65°	6.6
67.5°	2.6
70°	1.3
72.5°	1.3
75°	1.3
77.5°	1.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)