

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641848

Luminaire Tested: ML5612LSVWFL97FS1E - 693TBZB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641848
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-112)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 693TBZB - 1200LM - 3500K
Description: ML56 RR, MILKY OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1135.5 lumens
Efficiency: N/A
Efficacy: 68.8 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.21
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641848

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 1200LM - 3500K

Luminous Intensity Polar Plot

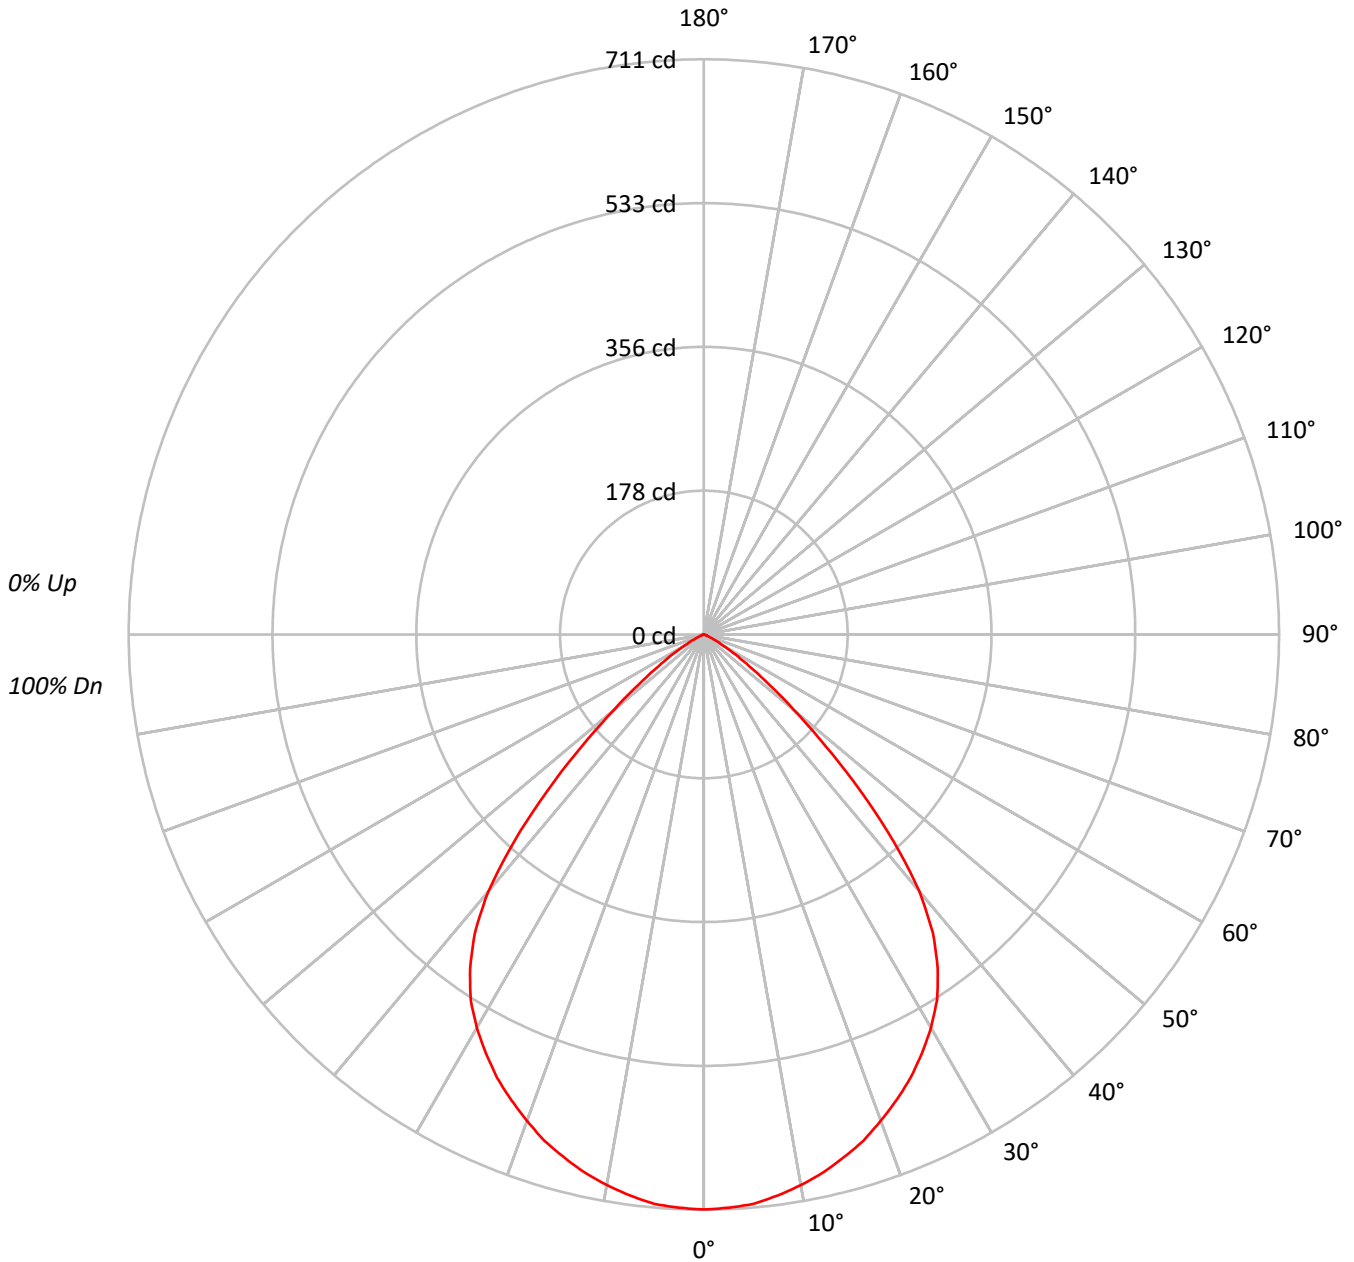



TEST NUMBER: P641848

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82																			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	69	76	72	69	67																			
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62	60																			
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	56	55																			
7	76	65	58	53	74	64	57	52	63	57	52	61	56	52	60	55	52	50																			
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46																			
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42																			
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	38961
5°	38878
10°	38471
15°	37957
20°	37307
25°	36571
30°	35531
35°	33729
40°	29677
45°	21219
50°	12383
55°	6537
60°	3059
65°	1271
70°	449
75°	297
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 21219 cd/sqm



TEST NUMBER: P641848

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.9	5.9
10°-20°	188.6	16.6
20°-30°	278.0	24.5
30°-40°	311.2	27.4
40°-50°	211.1	18.6
50°-60°	67.0	5.9
60°-70°	11.3	1.0
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	533.5	47.0
0°-40°	844.7	74.4
0°-60°	1122.7	98.9
0°-90°	1135.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1135.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	711	
5°	706	67
15°	669	189
25°	605	278
35°	504	311
45°	274	211
55°	68	67
65°	10	11
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641848

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	710.7
2.5°	709.3
5°	706.5
7.5°	699.5
10°	691.1
12.5°	681.4
15°	668.8
17.5°	656.2
20°	639.5
22.5°	622.7
25°	604.6
27.5°	583.6
30°	561.3
32.5°	536.2
35°	504.0
37.5°	464.9
40°	414.7
42.5°	347.7
45°	273.7
47.5°	203.9
50°	145.2
52.5°	101.9
55°	68.4
57.5°	46.1
60°	27.9
62.5°	16.8
65°	9.8
67.5°	4.2
70°	2.8
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)