

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641858

Luminaire Tested: ML5612LSVWFL97FS1E - 693TBZB - 900LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641858
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-112)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 693TBZB - 900LM - 3500K
Description: ML56 RR, MILKY OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 938.1 lumens
Efficiency: N/A
Efficacy: 70.5 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.21
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641858
CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 900LM - 3500K

Luminous Intensity Polar Plot

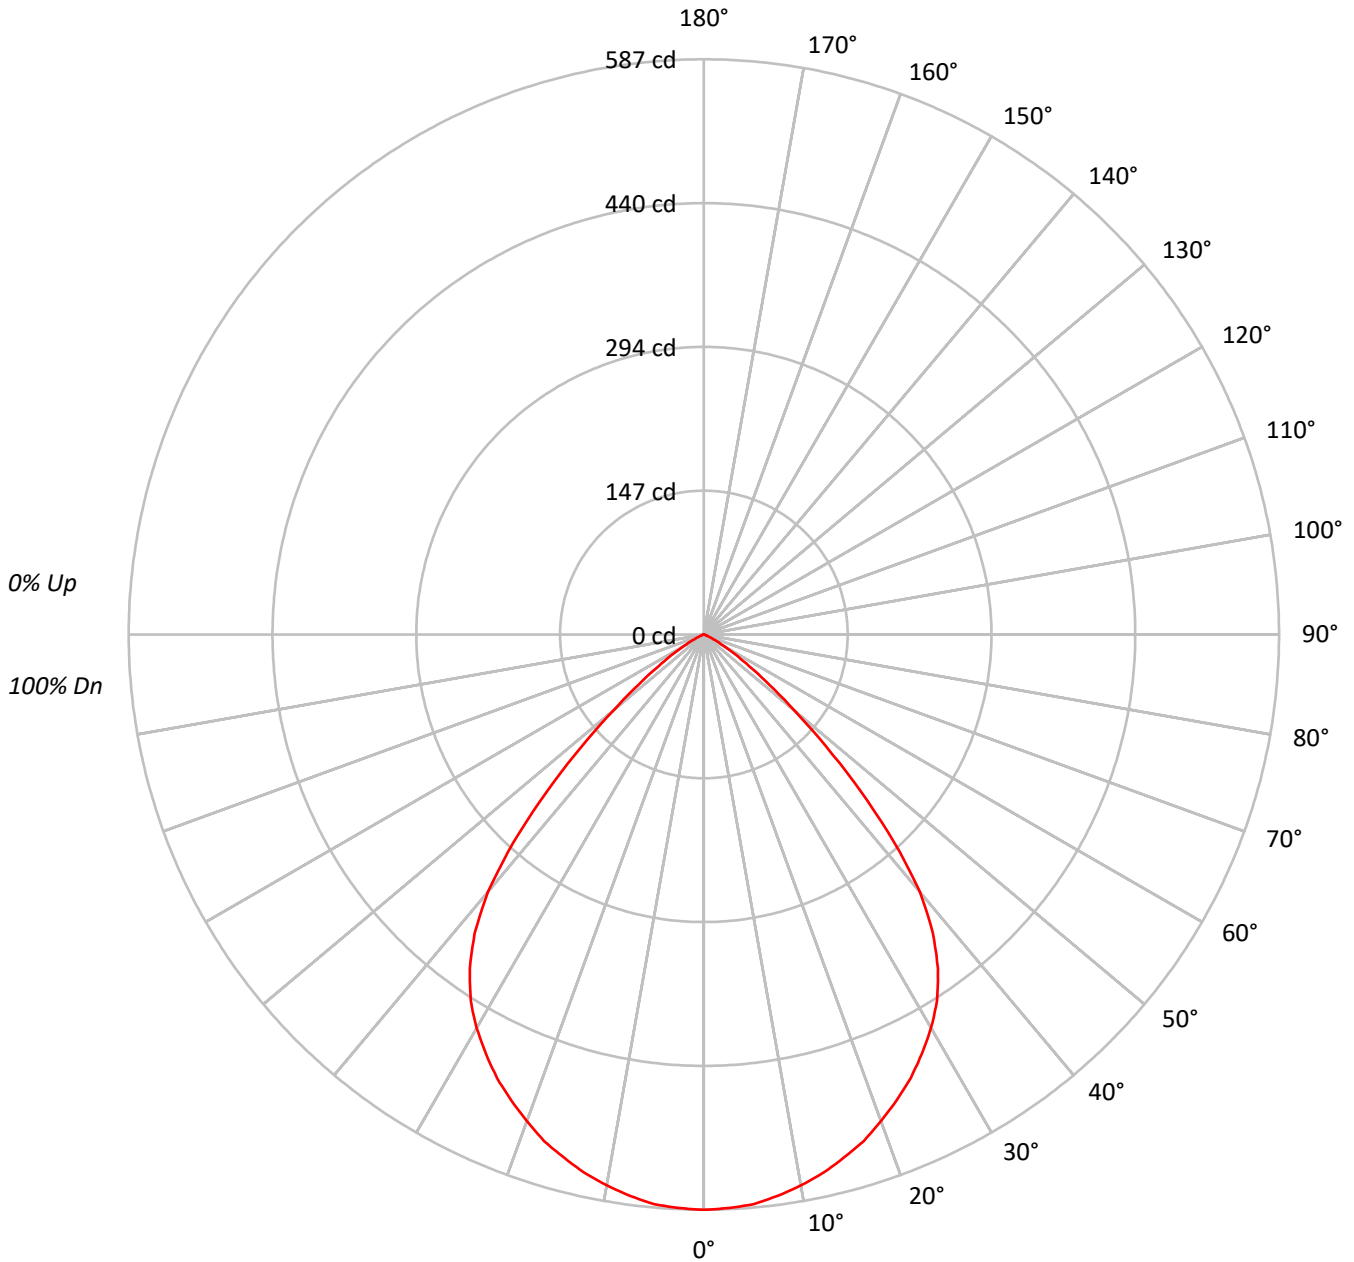



TEST NUMBER: P641858

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 900LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82																			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	69	76	72	69	67																			
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62	60																			
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	56	55																			
7	76	65	58	53	74	64	57	52	63	57	52	61	56	52	60	55	51	50																			
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46																			
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42																			
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	32185
5°	32115
10°	31780
15°	31357
20°	30820
25°	30207
30°	29353
35°	27867
40°	24517
45°	17529
50°	10234
55°	5400
60°	2533
65°	1051
70°	369
75°	254
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17529 cd/sqm



TEST NUMBER: P641858

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 900LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.3	5.9
10°-20°	155.8	16.6
20°-30°	229.6	24.5
30°-40°	257.1	27.4
40°-50°	174.4	18.6
50°-60°	55.3	5.9
60°-70°	9.3	1.0
70°-80°	1.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	440.7	47.0
0°-40°	697.8	74.4
0°-60°	927.5	98.9
0°-90°	938.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	938.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	587	
5°	584	55
15°	552	156
25°	499	230
35°	416	257
45°	226	174
55°	56	55
65°	8	9
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641858

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693TBZB - 900LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	587.1
2.5°	585.9
5°	583.6
7.5°	577.8
10°	570.9
12.5°	562.9
15°	552.5
17.5°	542.1
20°	528.3
22.5°	514.4
25°	499.4
27.5°	482.1
30°	463.7
32.5°	442.9
35°	416.4
37.5°	384.1
40°	342.6
42.5°	287.2
45°	226.1
47.5°	168.4
50°	120.0
52.5°	84.2
55°	56.5
57.5°	38.1
60°	23.1
62.5°	13.8
65°	8.1
67.5°	3.5
70°	2.3
72.5°	1.2
75°	1.2
77.5°	1.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)