

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641871

Luminaire Tested: ML5612LSVWFL97FS1E - 693WB - 900LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641871  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-109)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL97FS1E - 693WB - 900LM - 2700K  
Description: ML56 RR, MILKY OPTIC, 6" WHITE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1091.0 lumens  
Efficiency: N/A  
Efficacy: 82.0 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.22  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641871  
CATALOG NUMBER: ML5612LSVWFL97FS1E - 693WB - 900LM - 2700K

### Luminous Intensity Polar Plot

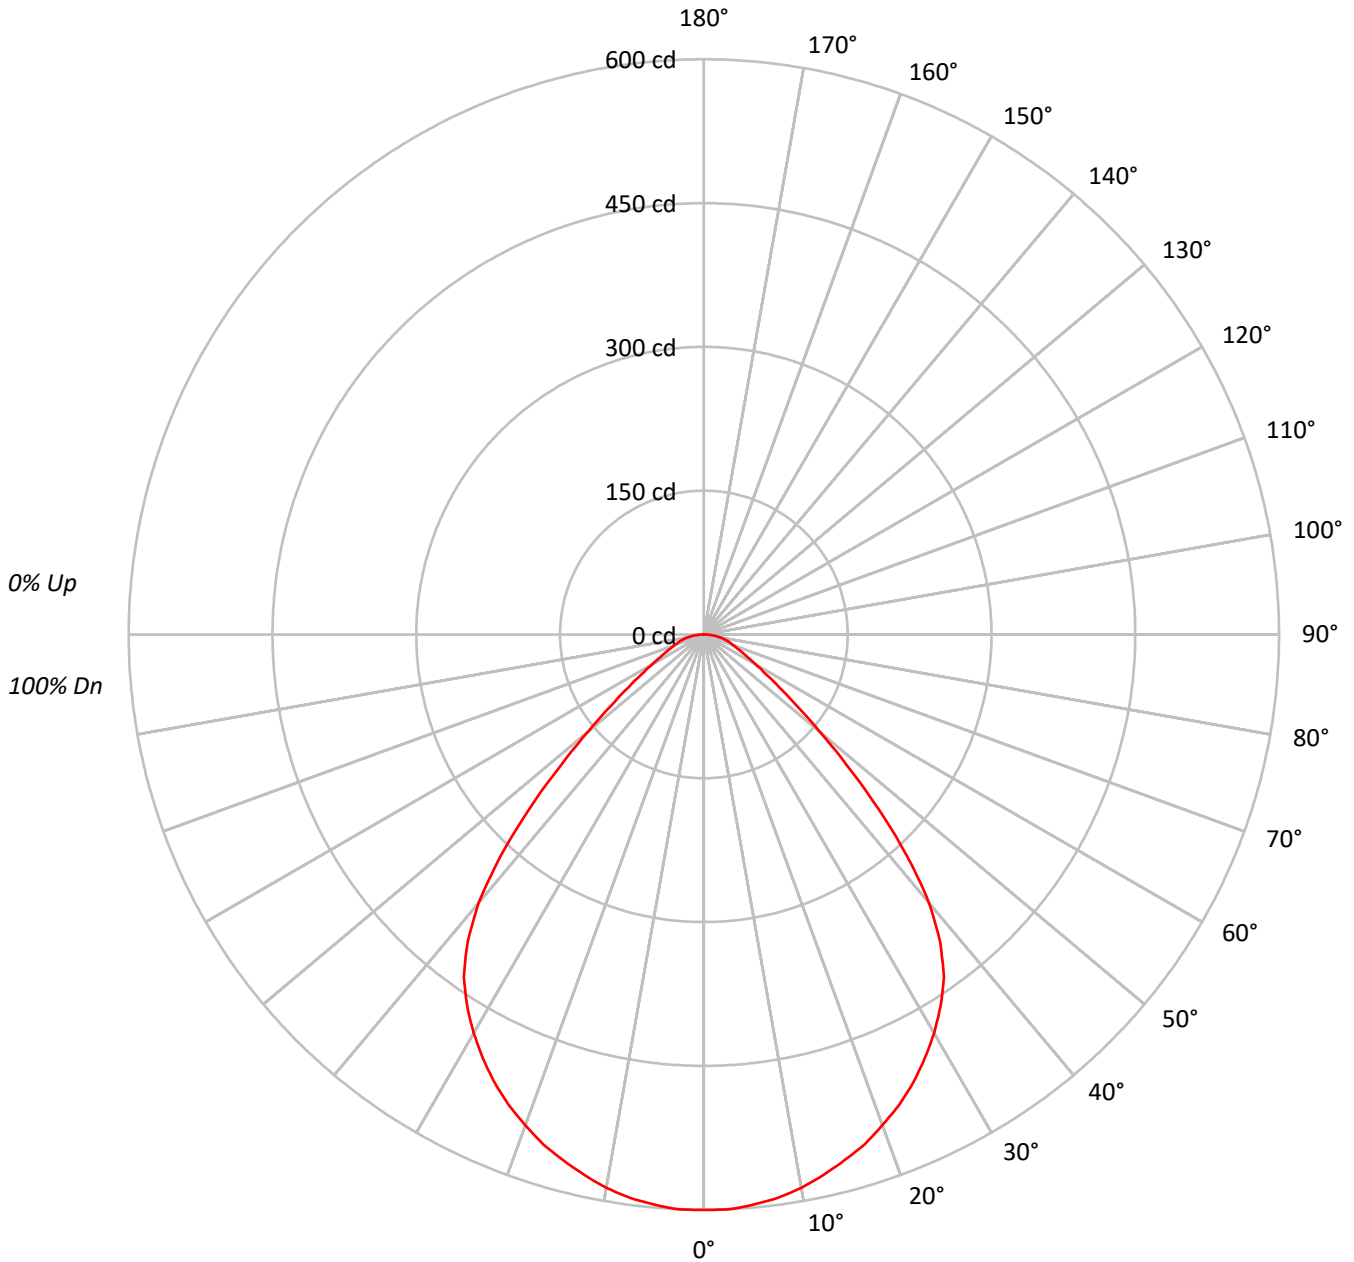



TEST NUMBER: P641871

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693WB - 900LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89																			
2	103	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	80	79																			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70																			
4	89	80	72	67	87	78	72	66	76	70	65	74	69	65	72	67	64	62																			
5	83	73	65	59	81	71	64	59	70	63	58	68	62	58	66	61	57	56																			
6	78	66	59	53	76	65	58	53	64	57	53	62	57	52	61	56	52	50																			
7	73	61	53	48	71	60	53	48	59	52	48	57	52	47	56	51	47	45																			
8	68	56	49	44	67	56	48	43	54	48	43	53	47	43	52	47	43	41																			
9	64	52	45	40	63	52	45	40	50	44	40	49	44	39	48	43	39	38																			
10	60	48	41	37	59	48	41	36	47	41	36	46	40	36	45	40	36	34																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	32909
5°	32853
10°	32626
15°	32214
20°	31771
25°	31230
30°	30397
35°	29219
40°	26163
45°	19971
50°	13407
55°	9175
60°	6820
65°	5669
70°	5241
75°	5316
80°	5177
85°	4780

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19971 cd/sqm



TEST NUMBER: P641871

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693WB - 900LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	56.7	5.2
10°-20°	160.1	14.7
20°-30°	237.4	21.8
30°-40°	269.4	24.7
40°-50°	198.4	18.2
50°-60°	89.9	8.2
60°-70°	44.4	4.1
70°-80°	26.1	2.4
80°-90°	8.8	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	454.2	41.6
0°-40°	723.5	66.3
0°-60°	1011.8	92.7
0°-90°	1091.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1091.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	600	
5°	597	57
15°	568	160
25°	516	237
35°	437	269
45°	258	198
55°	96	90
65°	44	44
75°	25	26
85°	8	9
90°	0	



TEST NUMBER: P641871

CATALOG NUMBER: ML5612LSVWFL97FS1E - 693WB - 900LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	600.3
2.5°	600.3
5°	597.0
7.5°	592.7
10°	586.1
12.5°	577.4
15°	567.6
17.5°	557.7
20°	544.6
22.5°	531.5
25°	516.3
27.5°	498.8
30°	480.2
32.5°	459.5
35°	436.6
37.5°	404.9
40°	365.6
42.5°	314.3
45°	257.6
47.5°	203.0
50°	157.2
52.5°	122.2
55°	96.0
57.5°	76.4
60°	62.2
62.5°	51.3
65°	43.7
67.5°	37.1
70°	32.7
72.5°	28.4
75°	25.1
77.5°	20.7
80°	16.4
82.5°	13.1
85°	7.6
87.5°	3.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)