

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641895

Luminaire Tested: ML5612LSVWFL97FS1E - 694WB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641895
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-113)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 694WB - 1200LM - 5000K
Description: ML56 RR, MILKY OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1631.2 lumens
Efficiency: N/A
Efficacy: 98.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.28
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641895
CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 1200LM - 5000K

Luminous Intensity Polar Plot

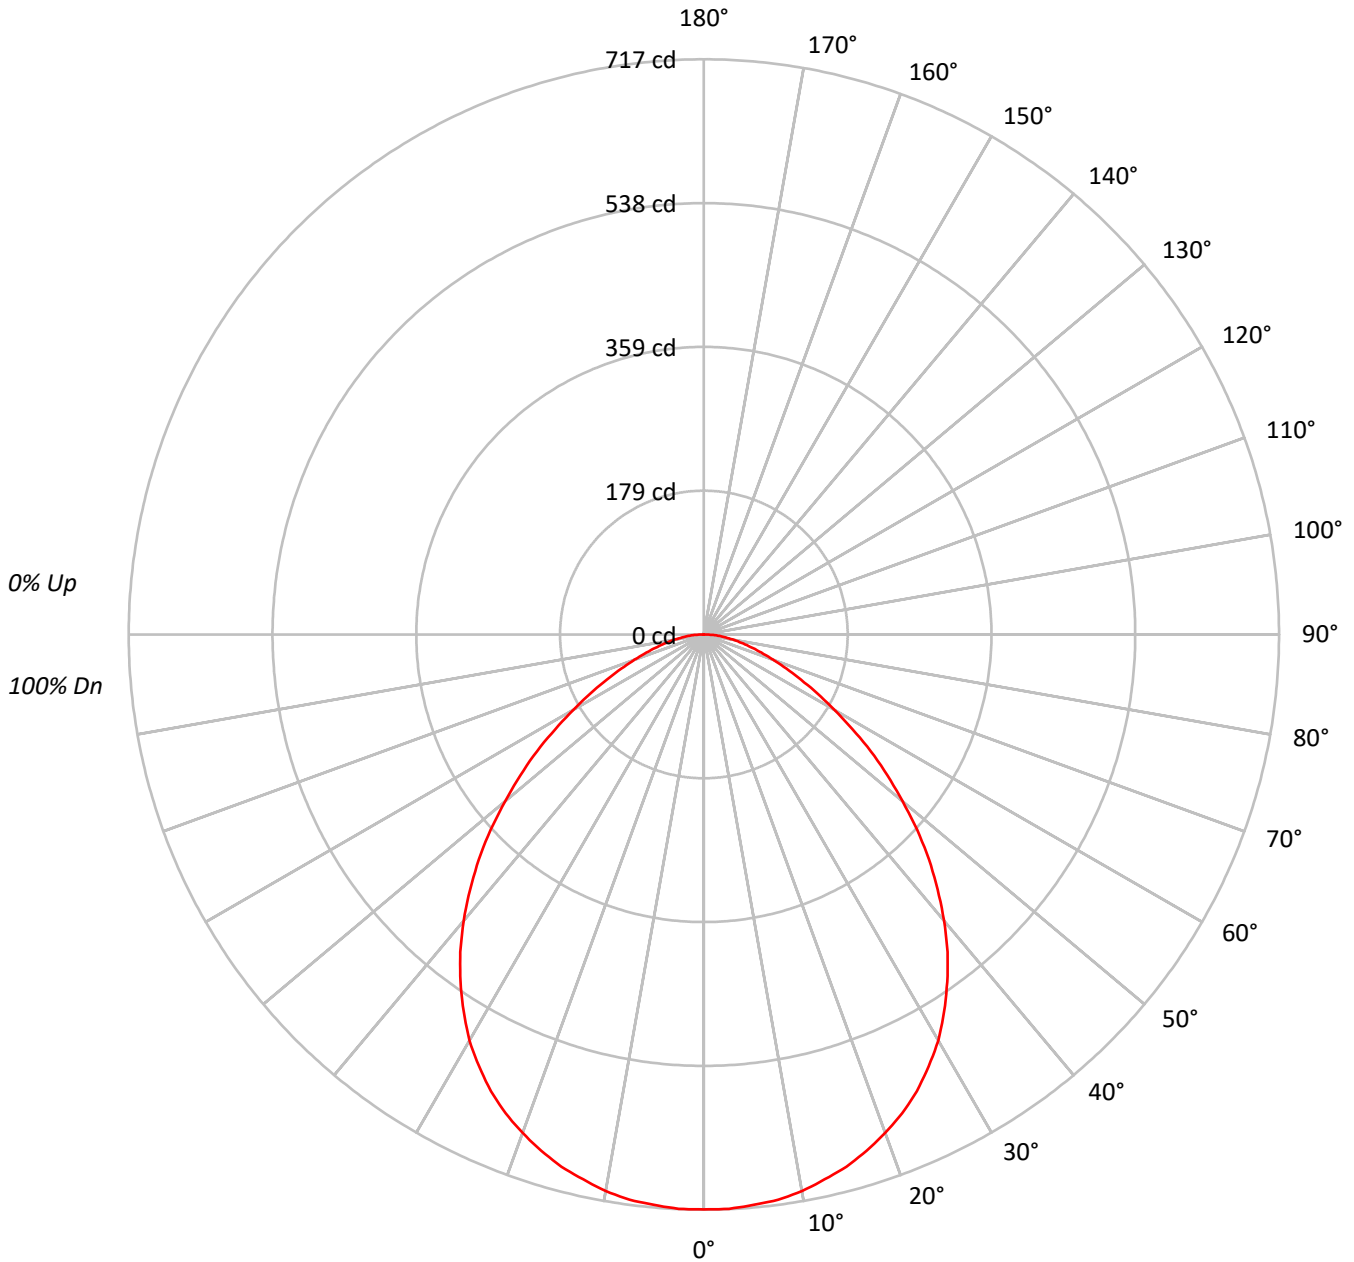



TEST NUMBER: P641895

CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86																			
2	101	94	88	83	99	92	86	82	88	84	80	85	81	78	82	79	76	74																			
3	93	83	76	70	91	82	75	70	79	73	68	76	71	67	74	70	66	64																			
4	86	75	67	61	84	73	66	60	71	64	59	69	63	59	67	62	58	56																			
5	79	67	59	53	77	66	58	53	64	57	52	62	56	51	61	55	51	49																			
6	74	61	53	47	72	60	52	46	58	51	46	57	51	46	55	50	45	43																			
7	68	56	47	42	67	55	47	41	53	46	41	52	46	41	51	45	41	39																			
8	64	51	43	37	62	50	43	37	49	42	37	48	42	37	47	41	37	35																			
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	38	33	32																			
10	56	44	36	31	55	43	36	31	42	35	31	41	35	31	40	35	30	29																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39290
5°	39275
10°	39228
15°	38973
20°	38568
25°	37992
30°	36999
35°	35396
40°	33334
45°	30755
50°	27547
55°	24267
60°	20590
65°	17343
70°	14698
75°	12730
80°	11397
85°	11322

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30755 cd/sqm



TEST NUMBER: P641895

CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	67.9	4.2
10°-20°	193.5	11.9
20°-30°	288.7	17.7
30°-40°	330.0	20.2
40°-50°	305.0	18.7
50°-60°	227.0	13.9
60°-70°	134.4	8.2
70°-80°	65.2	4.0
80°-90°	19.6	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	550.1	33.7
0°-40°	880.1	54.0
0°-60°	1412.0	86.6
0°-90°	1631.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1631.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	717	
5°	714	68
15°	687	194
25°	628	289
35°	529	330
45°	397	305
55°	254	227
65°	134	134
75°	60	65
85°	18	20
90°	0	



TEST NUMBER: P641895

CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	716.7
2.5°	716.7
5°	713.7
7.5°	710.7
10°	704.7
12.5°	695.7
15°	686.7
17.5°	674.6
20°	661.1
22.5°	646.1
25°	628.1
27.5°	607.0
30°	584.5
32.5°	557.4
35°	528.9
37.5°	498.8
40°	465.8
42.5°	431.2
45°	396.7
47.5°	360.6
50°	323.0
52.5°	288.5
55°	253.9
57.5°	219.4
60°	187.8
62.5°	159.3
65°	133.7
67.5°	111.2
70°	91.7
72.5°	75.1
75°	60.1
77.5°	48.1
80°	36.1
82.5°	25.5
85°	18.0
87.5°	10.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)