

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641897

Luminaire Tested: ML5612LSVWFL97FS1E - 694WB - 600LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641897
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-113)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 694WB - 600LM - 3000K
Description: ML56 RR, MILKY OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 949.9 lumens
Efficiency: N/A
Efficacy: 92.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.28
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641897
CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 600LM - 3000K

Luminous Intensity Polar Plot

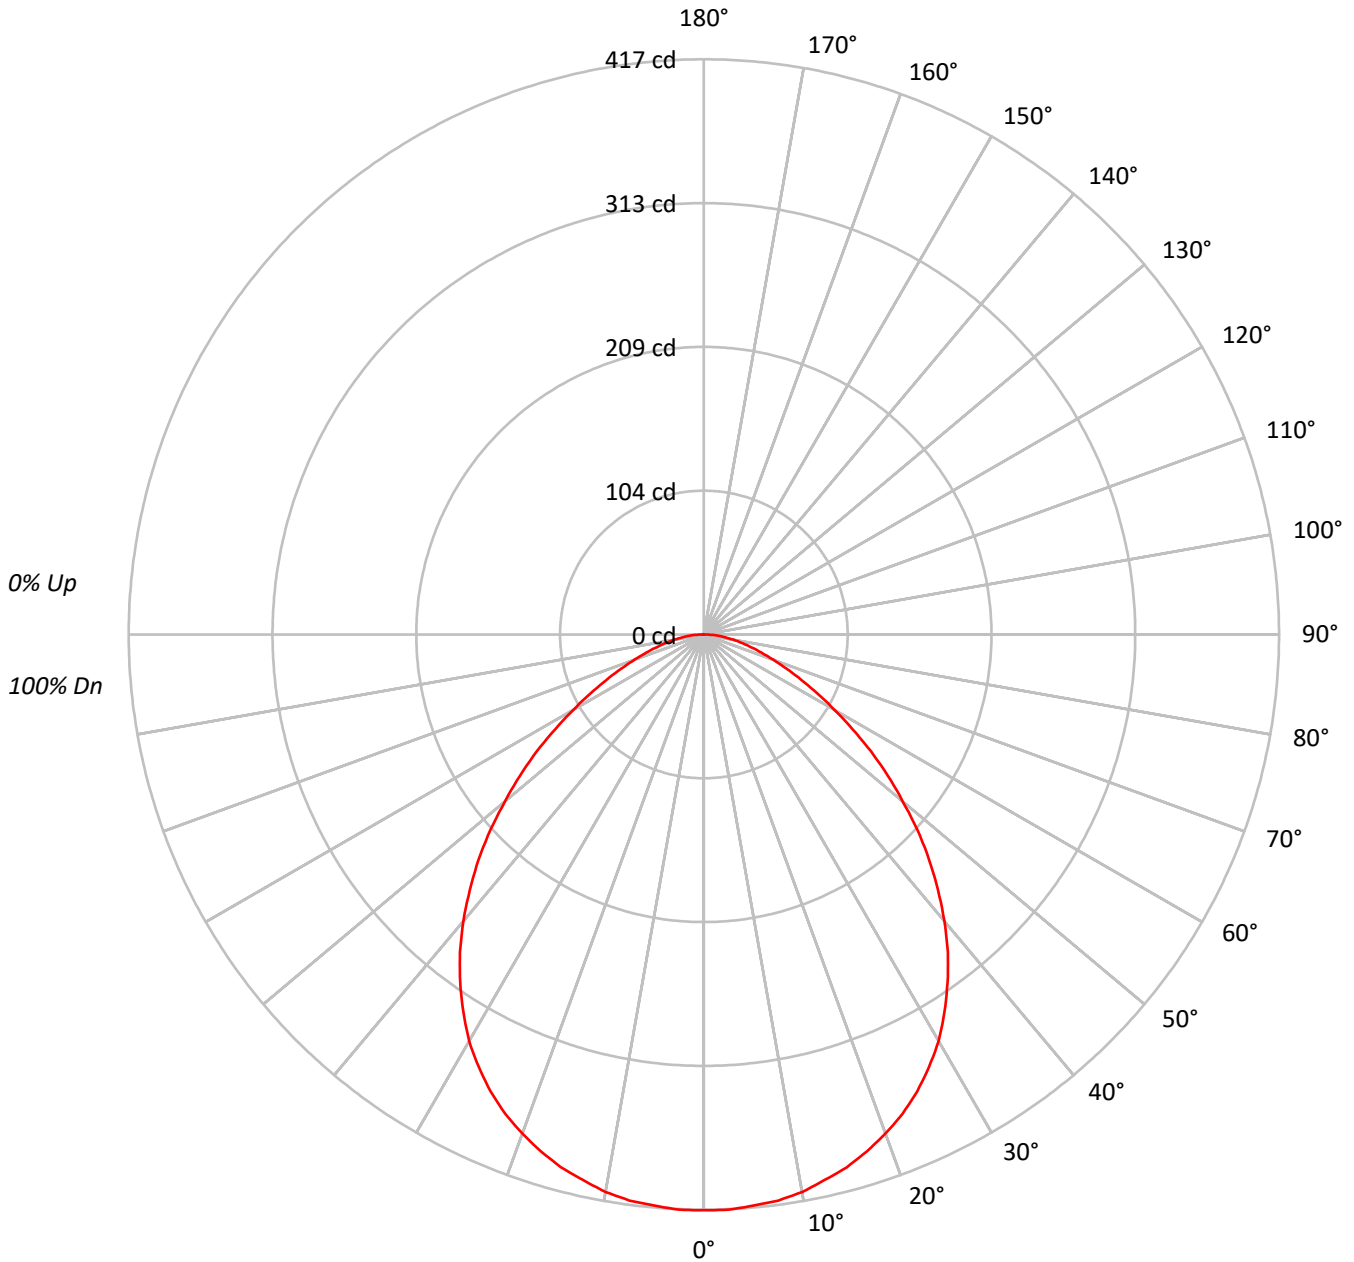



TEST NUMBER: P641897

CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 600LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86			
2	101	94	88	83	99	92	86	82	88	84	80	85	81	78	82	79	76	74			
3	93	83	76	70	91	82	75	70	79	73	68	76	71	67	74	70	66	64			
4	86	75	67	61	84	73	66	60	71	64	59	69	63	59	67	62	58	56			
5	79	67	59	53	77	66	58	53	64	57	52	62	56	51	61	55	51	49			
6	74	61	53	47	72	60	52	46	58	51	46	57	51	46	55	50	45	43			
7	68	56	47	42	67	55	47	41	53	46	41	52	46	41	51	45	41	39			
8	64	51	43	37	62	50	43	37	49	42	37	48	42	37	47	41	37	35			
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	38	33	32			
10	56	44	36	31	55	43	36	31	42	35	31	41	35	31	40	35	30	29			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	22882
5°	22870
10°	22845
15°	22696
20°	22460
25°	22120
30°	21548
35°	20612
40°	19408
45°	17909
50°	16042
55°	14136
60°	11995
65°	10105
70°	8559
75°	7413
80°	6630
85°	6604

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17909 cd/sqm



TEST NUMBER: P641897

CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 600LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.5	4.2
10°-20°	112.7	11.9
20°-30°	168.1	17.7
30°-40°	192.2	20.2
40°-50°	177.6	18.7
50°-60°	132.2	13.9
60°-70°	78.2	8.2
70°-80°	37.9	4.0
80°-90°	11.4	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	320.4	33.7
0°-40°	512.5	54.0
0°-60°	822.3	86.6
0°-90°	949.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	949.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	417	
5°	416	40
15°	400	113
25°	366	168
35°	308	192
45°	231	178
55°	148	132
65°	78	78
75°	35	38
85°	10	11
90°	0	



TEST NUMBER: P641897

CATALOG NUMBER: ML5612LSVWFL97FS1E - 694WB - 600LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	417.4
2.5°	417.4
5°	415.6
7.5°	413.9
10°	410.4
12.5°	405.1
15°	399.9
17.5°	392.9
20°	385.0
22.5°	376.2
25°	365.7
27.5°	353.5
30°	340.4
32.5°	324.6
35°	308.0
37.5°	290.5
40°	271.2
42.5°	251.1
45°	231.0
47.5°	210.0
50°	188.1
52.5°	168.0
55°	147.9
57.5°	127.7
60°	109.4
62.5°	92.7
65°	77.9
67.5°	64.7
70°	53.4
72.5°	43.7
75°	35.0
77.5°	28.0
80°	21.0
82.5°	14.9
85°	10.5
87.5°	6.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)