

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641947

Luminaire Tested: ML5612LSWFL5597FS1E - 592H - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641947
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-49)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 592H - 900LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 5" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1260.2 lumens
Efficiency: N/A
Efficacy: 94.8 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.88
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641947
CATALOG NUMBER: ML5612LSWFL5597FS1E - 592H - 900LM - 3000K

Luminous Intensity Polar Plot

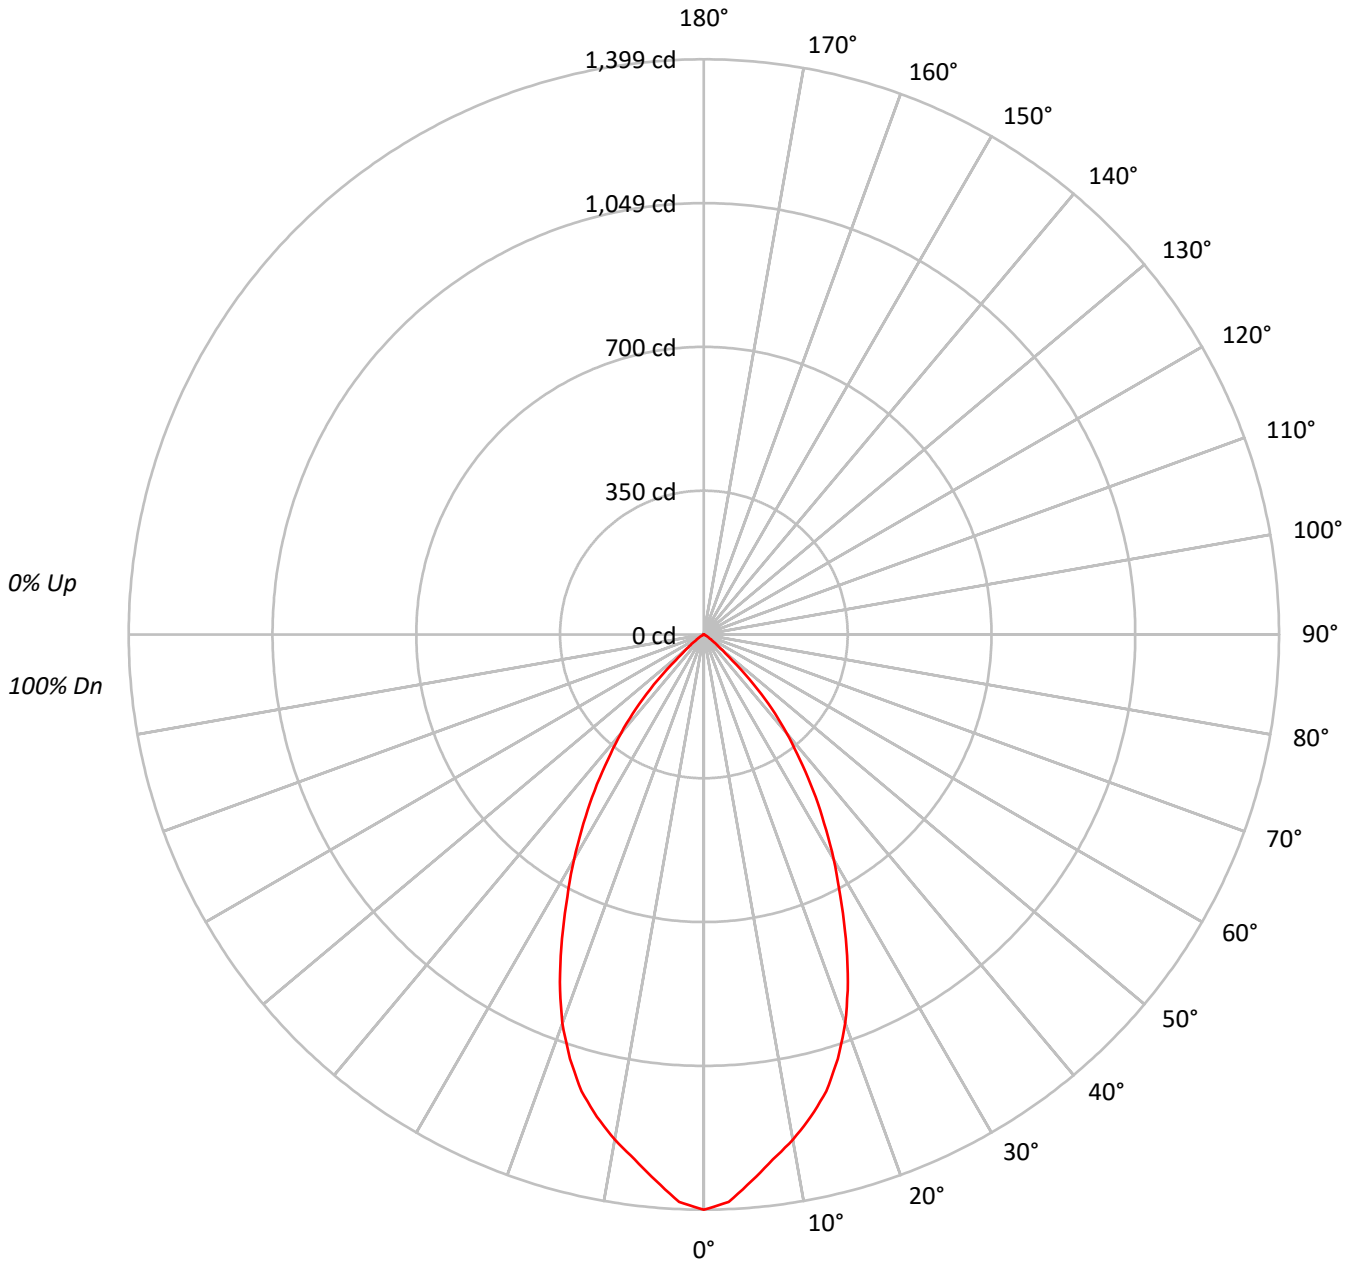



TEST NUMBER: P641947

CATALOG NUMBER: ML5612LSWFL5597FS1E - 592H - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80																			
4	96	88	83	78	94	87	82	78	85	81	77	83	79	76	81	78	75	74																			
5	91	82	76	72	89	82	76	72	80	75	71	78	74	70	76	73	70	68																			
6	86	77	71	66	85	76	70	66	75	70	66	73	69	65	72	68	65	63																			
7	82	72	66	62	80	71	66	61	70	65	61	69	64	61	68	64	60	59																			
8	78	68	61	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55																			
9	74	64	58	53	73	63	57	53	62	57	53	61	56	53	60	56	53	51																			
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	50	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	110446
5°	105709
10°	99998
15°	93976
20°	84520
25°	71110
30°	57527
35°	44696
40°	32286
45°	19180
50°	6484
55°	2932
60°	884
65°	205
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19180 cd/sqm



TEST NUMBER: P641947

CATALOG NUMBER: ML5612LSWFL5597FS1E - 592H - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.6	9.9
10°-20°	319.7	25.4
20°-30°	373.1	29.6
30°-40°	288.7	22.9
40°-50°	131.0	10.4
50°-60°	21.3	1.7
60°-70°	1.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	817.5	64.9
0°-40°	1106.2	87.8
0°-60°	1258.5	99.9
0°-90°	1260.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1260.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1399	
5°	1334	125
15°	1150	320
25°	816	373
35°	464	289
45°	172	131
55°	21	21
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641947

CATALOG NUMBER: ML5612LSWFL5597FS1E - 592H - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1399.1
2.5°	1381.2
5°	1334.0
7.5°	1288.0
10°	1247.5
12.5°	1201.5
15°	1149.9
17.5°	1082.5
20°	1006.1
22.5°	915.2
25°	816.4
27.5°	718.7
30°	631.1
32.5°	544.6
35°	463.8
37.5°	382.9
40°	313.3
42.5°	244.8
45°	171.8
47.5°	92.1
50°	52.8
52.5°	33.7
55°	21.3
57.5°	12.4
60°	5.6
62.5°	2.2
65°	1.1
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)