

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641987

Luminaire Tested: ML5612LSWFL5597FS1E - 593BB - 600LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641987
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 593BB - 600LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 5" BLACK BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 950.8 lumens
Efficiency: N/A
Efficacy: 92.3 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641987

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593BB - 600LM - 3000K

Luminous Intensity Polar Plot

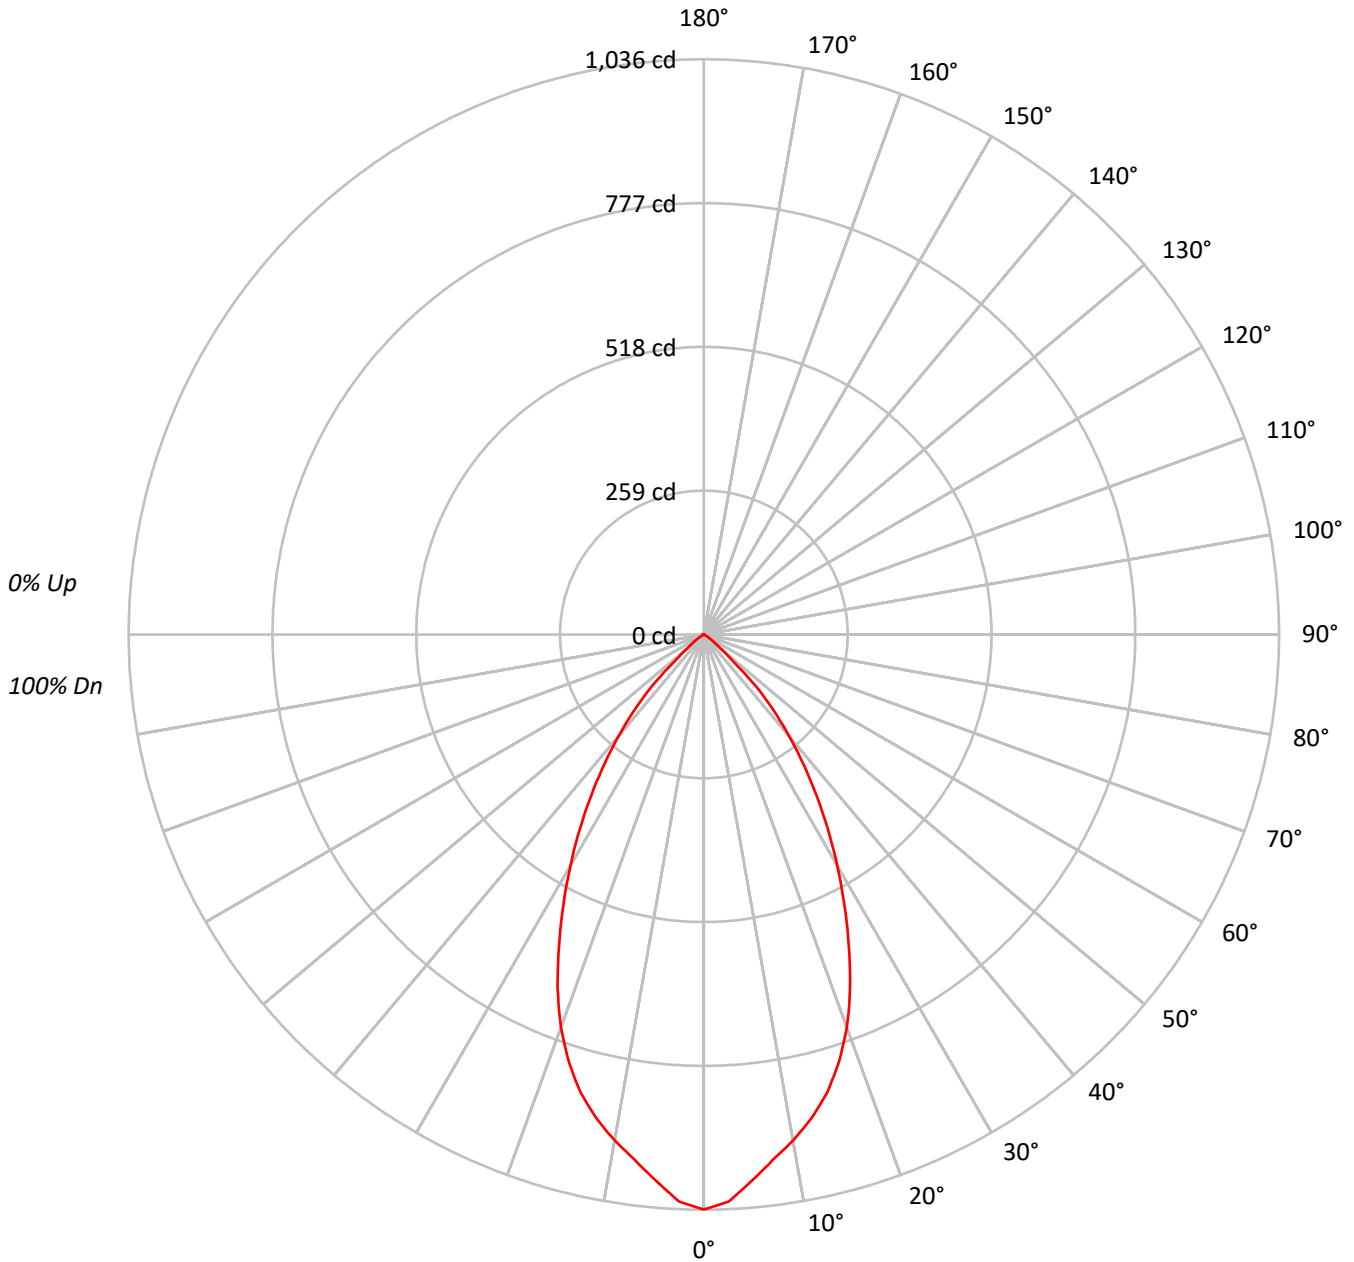



TEST NUMBER: P641987

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593BB - 600LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	83	81	79																			
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73																			
5	91	82	76	72	89	81	76	71	80	75	71	78	74	70	76	73	70	68																			
6	86	77	71	66	85	76	70	66	75	69	65	73	69	65	72	68	65	63																			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			
9	74	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51																			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	81759
5°	78260
10°	74187
15°	69916
20°	63266
25°	53794
30°	43772
35°	34057
40°	24516
45°	15038
50°	4937
55°	2161
60°	553
65°	168
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15038 cd/sqm



TEST NUMBER: P641987

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593BB - 600LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.3	9.7
10°-20°	238.2	25.1
20°-30°	282.1	29.7
30°-40°	220.3	23.2
40°-50°	100.7	10.6
50°-60°	16.0	1.7
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	612.7	64.4
0°-40°	833.0	87.6
0°-60°	949.7	99.9
0°-90°	950.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	950.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1036	
5°	988	92
15°	856	238
25°	618	282
35°	353	220
45°	135	101
55°	16	16
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641987

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593BB - 600LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1035.7
2.5°	1022.6
5°	987.6
7.5°	954.3
10°	925.5
12.5°	893.1
15°	855.5
17.5°	808.3
20°	753.1
22.5°	688.4
25°	617.6
27.5°	547.6
30°	480.2
32.5°	415.5
35°	353.4
37.5°	293.9
40°	237.9
42.5°	186.3
45°	134.7
47.5°	71.7
50°	40.2
52.5°	25.4
55°	15.7
57.5°	9.6
60°	3.5
62.5°	1.7
65°	0.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)