

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642001

Luminaire Tested: ML5612LSWFL5597FS1E - 593SNB - 600LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642001  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-53)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSWFL5597FS1E - 593SNB - 600LM - 2700K  
Description: ML56 RR, 55D TIR OPTIC, 5" SATIN NICKLE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 940.6 lumens  
Efficiency: N/A  
Efficacy: 91.3 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642001  
CATALOG NUMBER: ML5612LSWFL5597FS1E - 593SNB - 600LM - 2700K

### Luminous Intensity Polar Plot

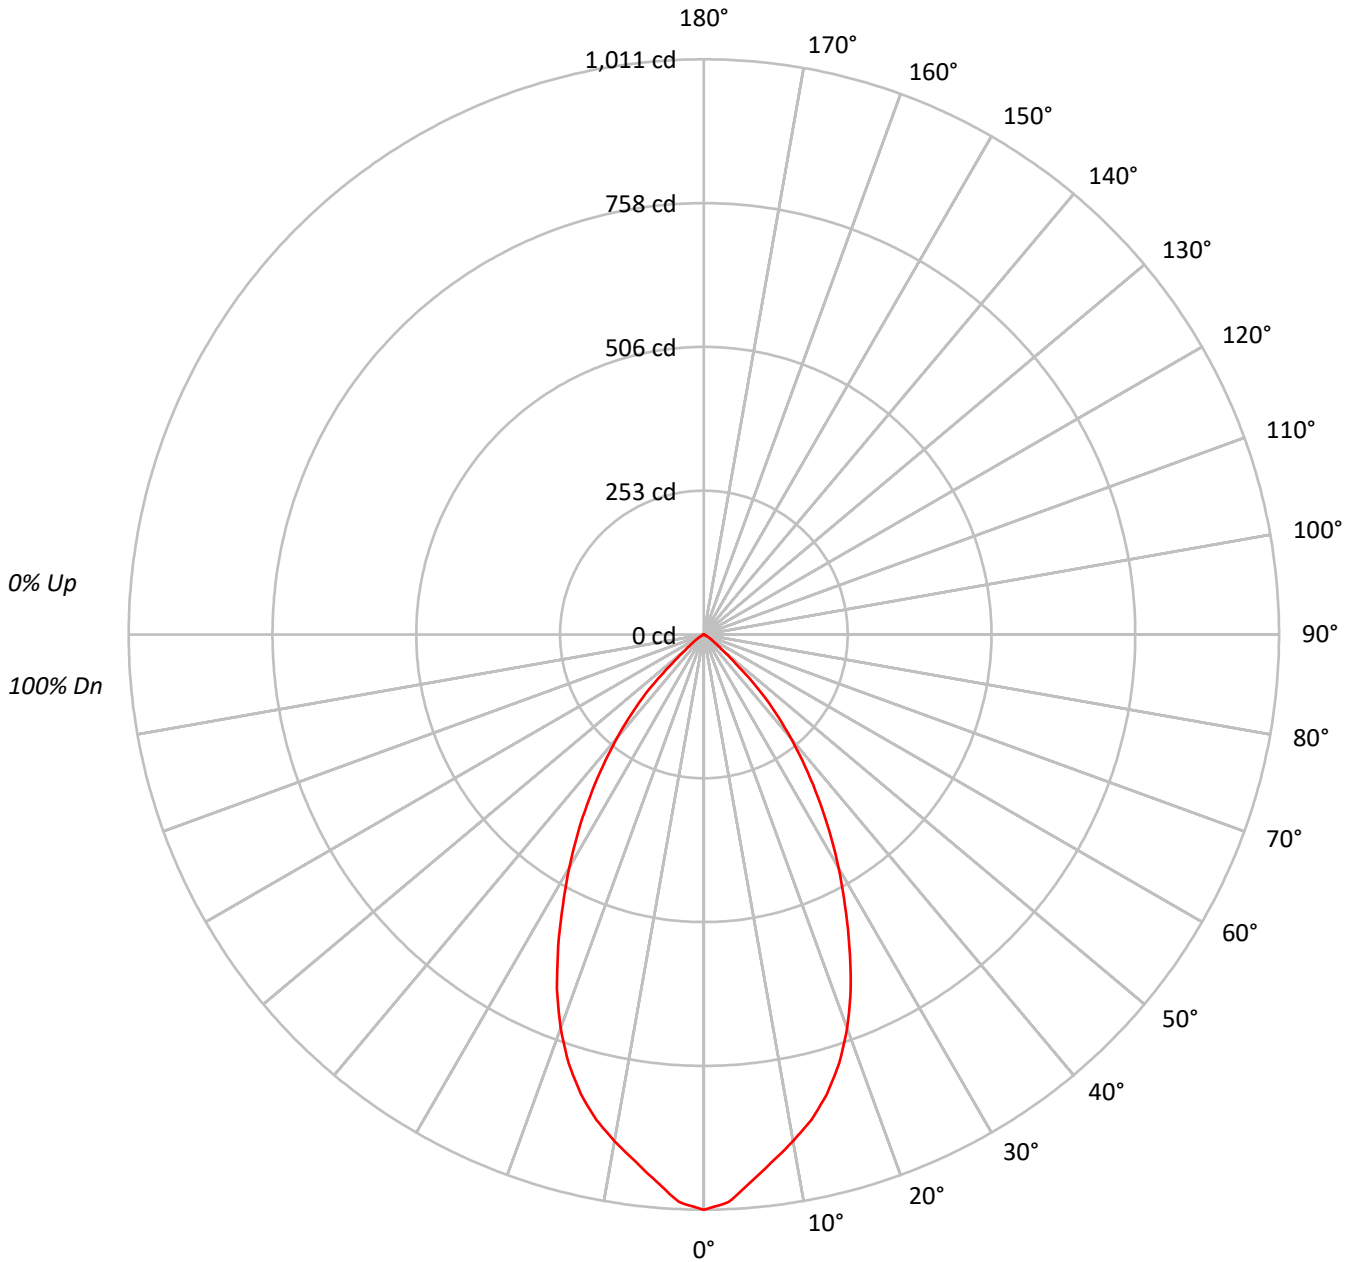



TEST NUMBER: P642001

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593SNB - 600LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	107	102	98	94	105	101	97	93	97	94	91	94	92	89	91	89	88	86	86	86	86
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	82	77	85	80	76	83	79	76	81	77	75	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68	68	68	68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	60	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	79833
5°	76429
10°	72471
15°	68331
20°	61880
25°	52749
30°	43106
35°	33691
40°	24454
45°	15194
50°	5219
55°	2464
60°	947
65°	318
70°	208
75°	275
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15194 cd/sqm



TEST NUMBER: P642001

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593SNB - 600LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	90.2	9.6
10°-20°	232.9	24.8
20°-30°	276.6	29.4
30°-40°	218.1	23.2
40°-50°	102.2	10.9
50°-60°	17.7	1.9
60°-70°	2.3	0.2
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	599.7	63.8
0°-40°	817.8	86.9
0°-60°	937.7	99.7
0°-90°	940.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	940.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1011	
5°	964	90
15°	836	233
25°	606	277
35°	350	218
45°	136	102
55°	18	18
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P642001

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593SNB - 600LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1011.3
2.5°	998.6
5°	964.5
7.5°	933.1
10°	904.1
12.5°	873.5
15°	836.1
17.5°	790.2
20°	736.6
22.5°	674.5
25°	605.6
27.5°	536.7
30°	472.9
32.5°	410.8
35°	349.6
37.5°	291.7
40°	237.3
42.5°	186.3
45°	136.1
47.5°	76.6
50°	42.5
52.5°	27.2
55°	17.9
57.5°	11.1
60°	6.0
62.5°	3.4
65°	1.7
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)