

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642082

Luminaire Tested: ML5612LSWFL5597FS1E - 594WB - 900LM - 3000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642082  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-55)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSWFL5597FS1E - 594WB - 900LM - 3000K  
Description: ML56 RR, 55D TIR OPTIC, 5" WHITE GIMBAL TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1275.9 lumens  
Efficiency: N/A  
Efficacy: 95.9 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.88  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642082  
CATALOG NUMBER: ML5612LSWFL5597FS1E - 594WB - 900LM - 3000K

### Luminous Intensity Polar Plot

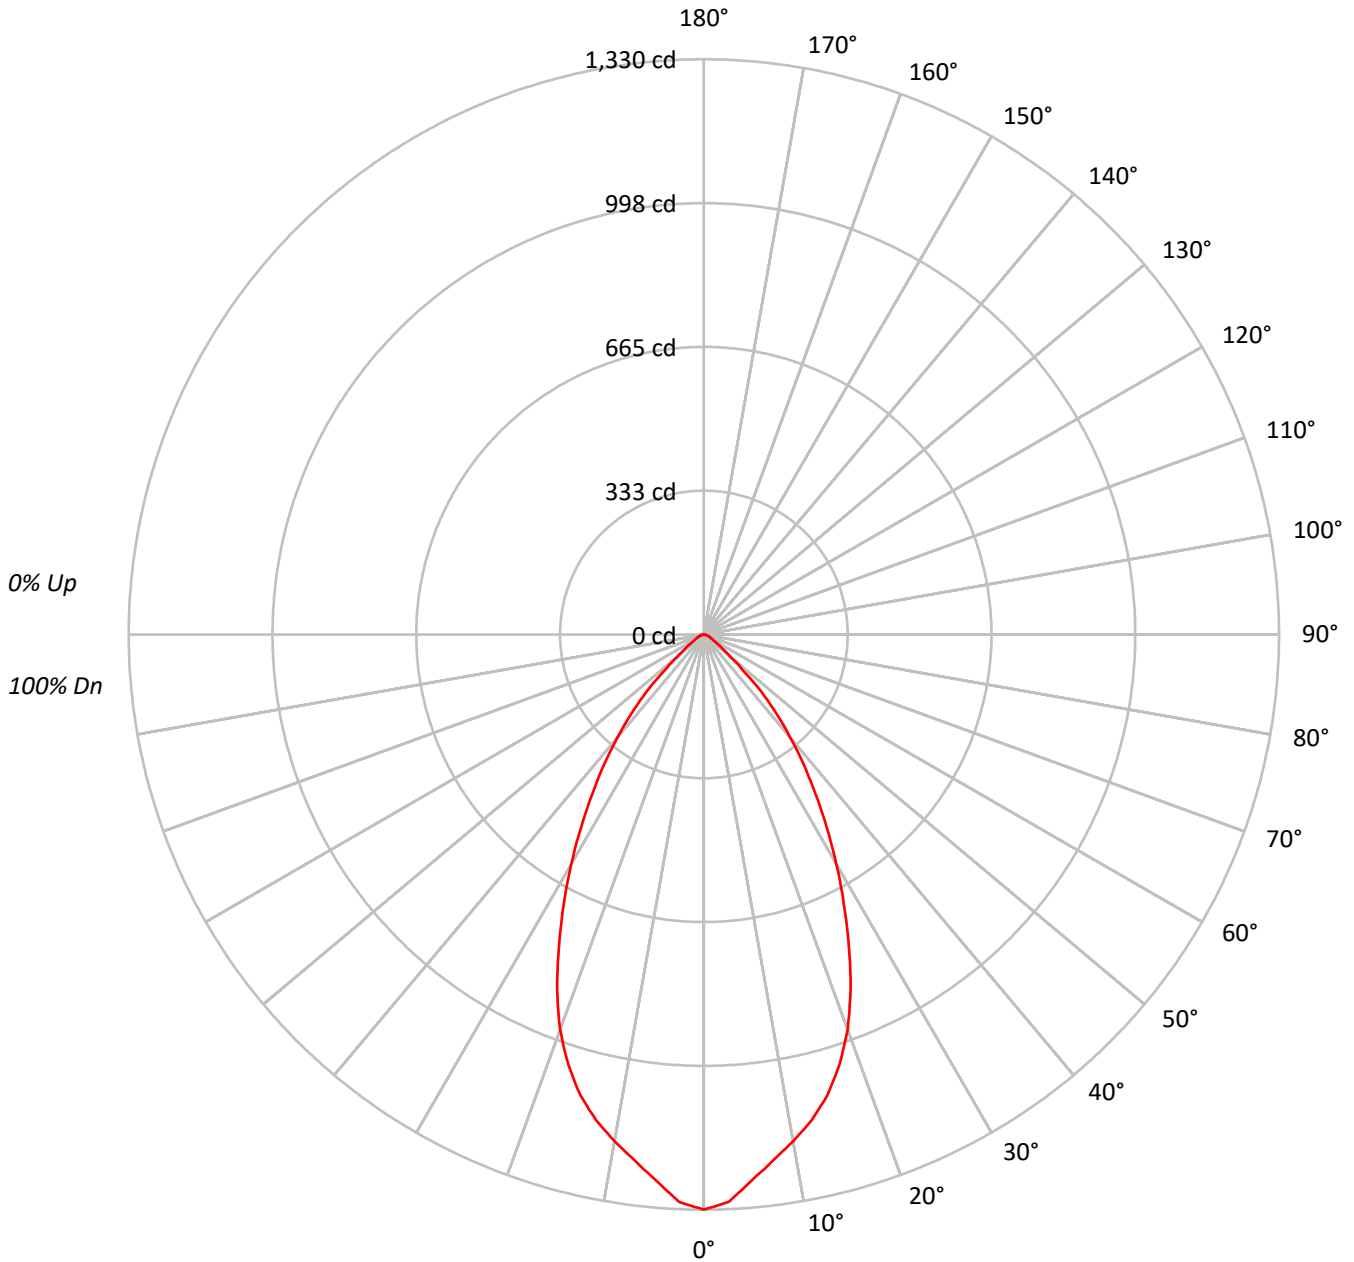



TEST NUMBER: P642082

CATALOG NUMBER: ML5612LSWFL5597FS1E - 594WB - 900LM - 3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92				92															
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	68	64	71	67	63	70	66	63	61				61															
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57				57															
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53				53															
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49				49															
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	47	46				46															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	104984
5°	100408
10°	95357
15°	90160
20°	81647
25°	69011
30°	55859
35°	43366
40°	32038
45°	21044
50°	10058
55°	5409
60°	3726
65°	2933
70°	2585
75°	1708
80°	1000
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21044 cd/sqm



TEST NUMBER: P642082

CATALOG NUMBER: ML5612LSWFL5597FS1E - 594WB - 900LM - 3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	118.6	9.3
10°-20°	307.1	24.1
20°-30°	362.1	28.4
30°-40°	281.9	22.1
40°-50°	143.9	11.3
50°-60°	39.3	3.1
60°-70°	16.2	1.3
70°-80°	6.2	0.5
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	787.7	61.7
0°-40°	1069.7	83.8
0°-60°	1252.9	98.2
0°-90°	1275.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1275.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1330	
5°	1267	119
15°	1103	307
25°	792	362
35°	450	282
45°	188	144
55°	39	39
65°	16	16
75°	6	6
85°	0	1
90°	0	



TEST NUMBER: P642082

CATALOG NUMBER: ML5612LSWFL5597FS1E - 594WB - 900LM - 3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1329.9
2.5°	1313.1
5°	1267.1
7.5°	1226.7
10°	1189.6
12.5°	1150.4
15°	1103.2
17.5°	1042.6
20°	971.9
22.5°	886.6
25°	792.3
27.5°	700.3
30°	612.8
32.5°	528.6
35°	450.0
37.5°	378.2
40°	310.9
42.5°	248.0
45°	188.5
47.5°	123.5
50°	81.9
52.5°	56.1
55°	39.3
57.5°	29.2
60°	23.6
62.5°	19.1
65°	15.7
67.5°	13.5
70°	11.2
72.5°	7.9
75°	5.6
77.5°	3.4
80°	2.2
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)