

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642135

Luminaire Tested: ML5612LSWFL5597FS1E - 692SC - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642135
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 692SC - 1200LM - 5000K
Description: ML56 RR, 55D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1700.3 lumens
Efficiency: N/A
Efficacy: 103.0 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 0.71 / 0.81
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642135

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 1200LM - 5000K

Luminous Intensity Polar Plot

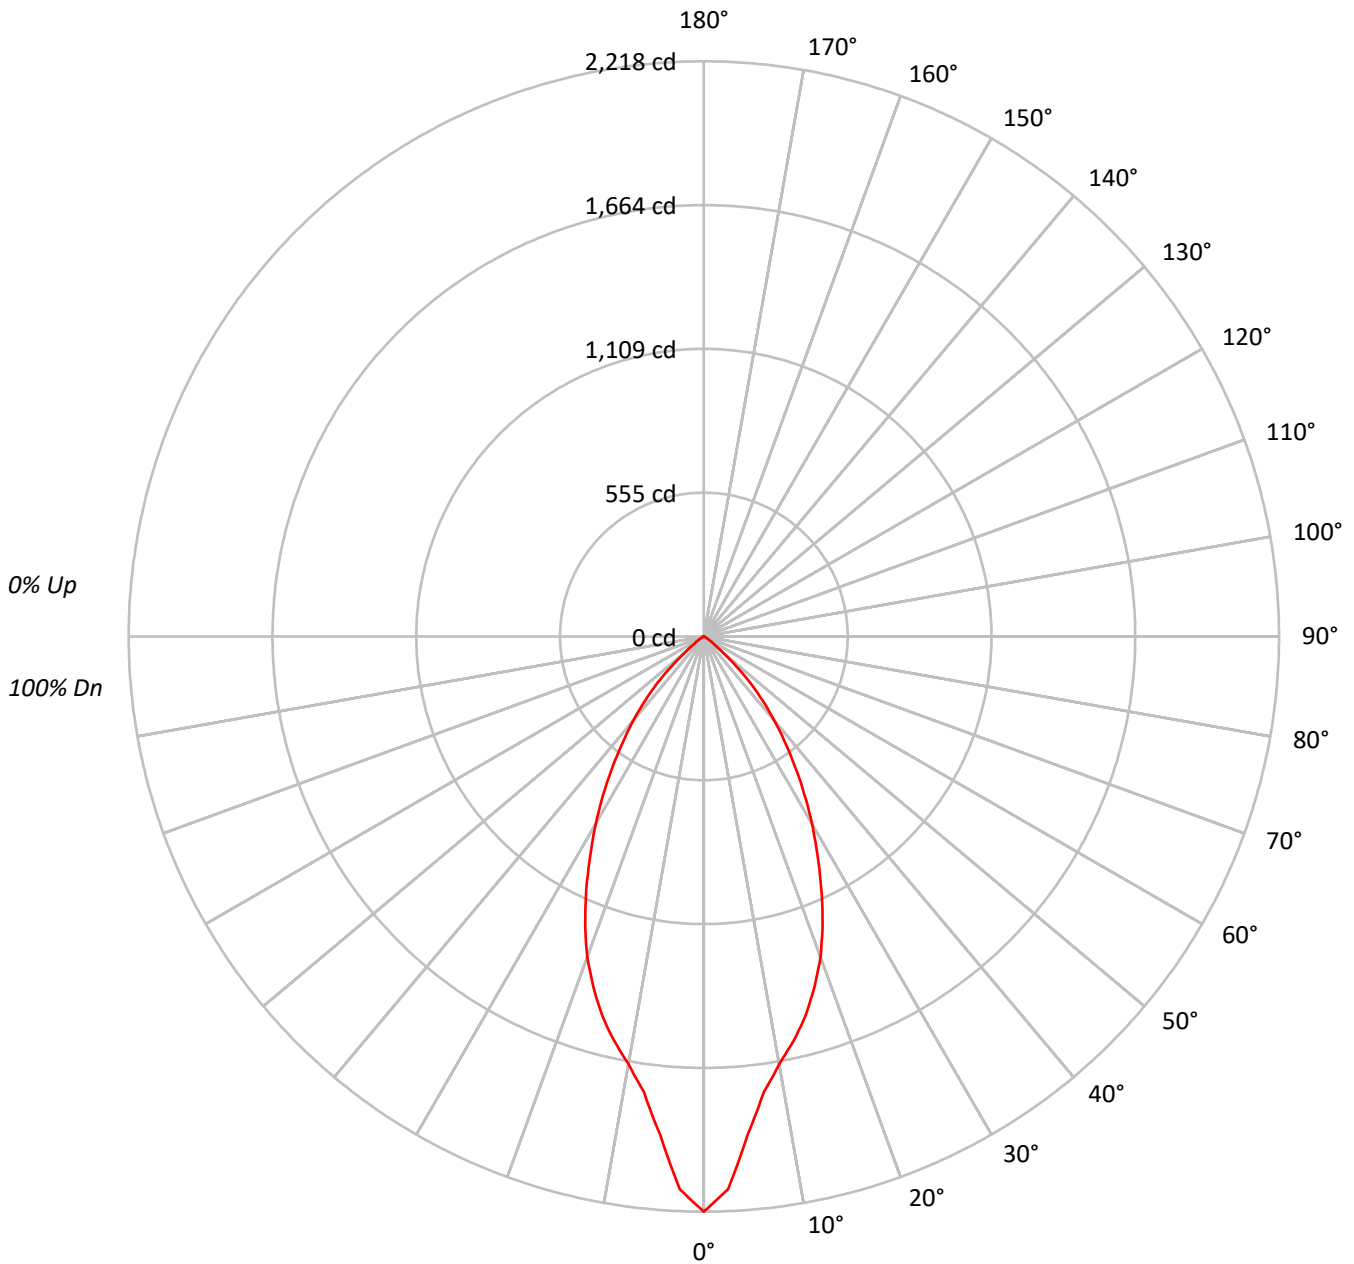



TEST NUMBER: P642135

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86
3	102	95	90	86	100	94	89	85	91	87	84	88	85	82	86	83	81	79
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55
9	74	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	121580
5°	106169
10°	93179
15°	85960
20°	76698
25°	64800
30°	52692
35°	41024
40°	30214
45°	19568
50°	8076
55°	3020
60°	1316
65°	389
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19568 cd/sqm



TEST NUMBER: P642135

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	176.5	10.4
10°-20°	421.6	24.8
20°-30°	489.5	28.8
30°-40°	383.5	22.6
40°-50°	192.0	11.3
50°-60°	33.9	2.0
60°-70°	3.3	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1087.6	64.0
0°-40°	1471.1	86.5
0°-60°	1697.0	99.8
0°-90°	1700.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1700.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2218	
5°	1929	176
15°	1515	422
25°	1071	490
35°	613	383
45°	252	192
55°	32	34
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642135

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2217.8
2.5°	2133.6
5°	1929.3
7.5°	1771.5
10°	1673.9
12.5°	1597.2
15°	1514.6
17.5°	1416.9
20°	1314.7
22.5°	1196.0
25°	1071.3
27.5°	946.6
30°	832.4
32.5°	721.2
35°	613.0
37.5°	512.4
40°	422.2
42.5°	335.1
45°	252.4
47.5°	163.8
50°	94.7
52.5°	49.6
55°	31.6
57.5°	19.5
60°	12.0
62.5°	4.5
65°	3.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)