

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642139

Luminaire Tested: ML5612LSWFL5597FS1E - 692SC - 600LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642139
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 692SC - 600LM - 4000K
Description: ML56 RR, 55D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1094.4 lumens
Efficiency: N/A
Efficacy: 106.2 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.81
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642139
CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 600LM - 4000K

Luminous Intensity Polar Plot

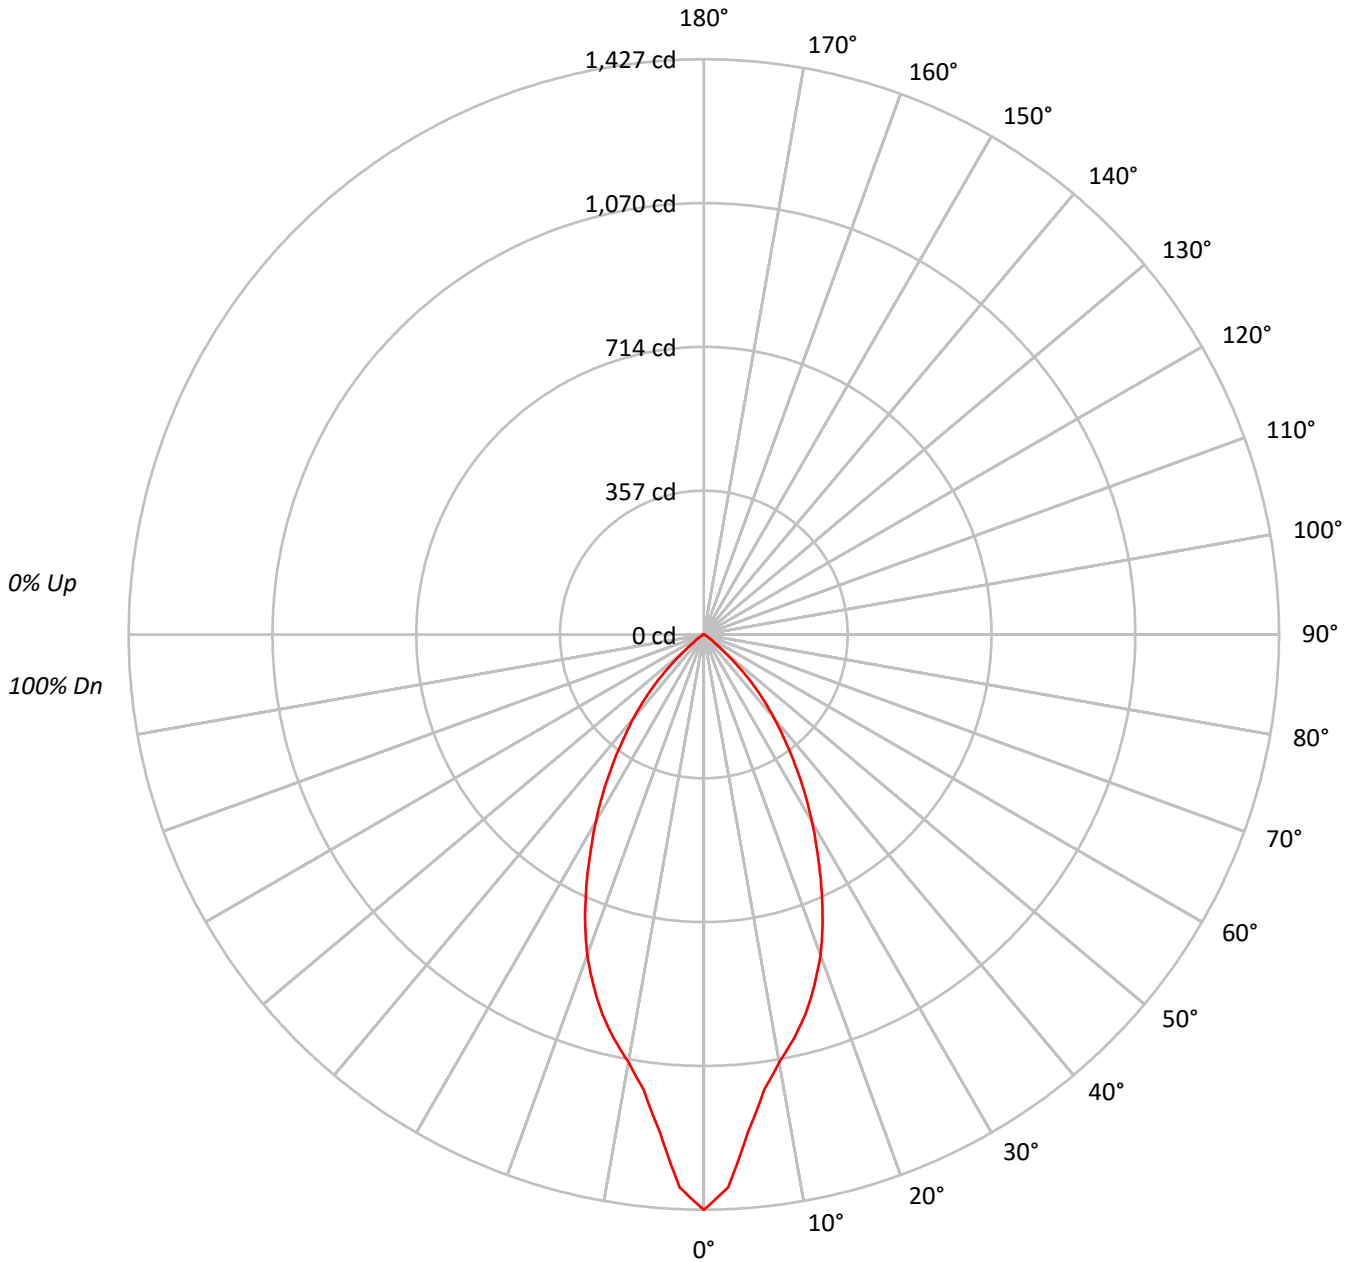



TEST NUMBER: P642139

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 600LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	88	85	82	86	83	81	79																			
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			
9	74	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51																			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	78250
5°	68336
10°	59969
15°	55324
20°	49366
25°	41706
30°	33917
35°	26408
40°	19451
45°	12598
50°	5194
55°	1940
60°	844
65°	246
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12598 cd/sqm



TEST NUMBER: P642139

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 600LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	113.6	10.4
10°-20°	271.4	24.8
20°-30°	315.1	28.8
30°-40°	246.8	22.6
40°-50°	123.6	11.3
50°-60°	21.8	2.0
60°-70°	2.1	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	700.0	64.0
0°-40°	946.9	86.5
0°-60°	1092.3	99.8
0°-90°	1094.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1094.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1427	
5°	1242	114
15°	975	271
25°	690	315
35°	395	247
45°	162	124
55°	20	22
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642139

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692SC - 600LM - 4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1427.4
2.5°	1373.3
5°	1241.8
7.5°	1140.2
10°	1077.3
12.5°	1028.0
15°	974.8
17.5°	912.0
20°	846.2
22.5°	769.8
25°	689.5
27.5°	609.3
30°	535.8
32.5°	464.2
35°	394.6
37.5°	329.8
40°	271.8
42.5°	215.7
45°	162.5
47.5°	105.4
50°	60.9
52.5°	31.9
55°	20.3
57.5°	12.6
60°	7.7
62.5°	2.9
65°	1.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)