

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642146

Luminaire Tested: ML5612LSWFL5597FS1E - 692W - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642146
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-62)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 692W - 1200LM - 2700K
Description: ML56 RR, 55D TIR OPTIC, 6" WHITE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1492.4 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642146
CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 2700K

Luminous Intensity Polar Plot

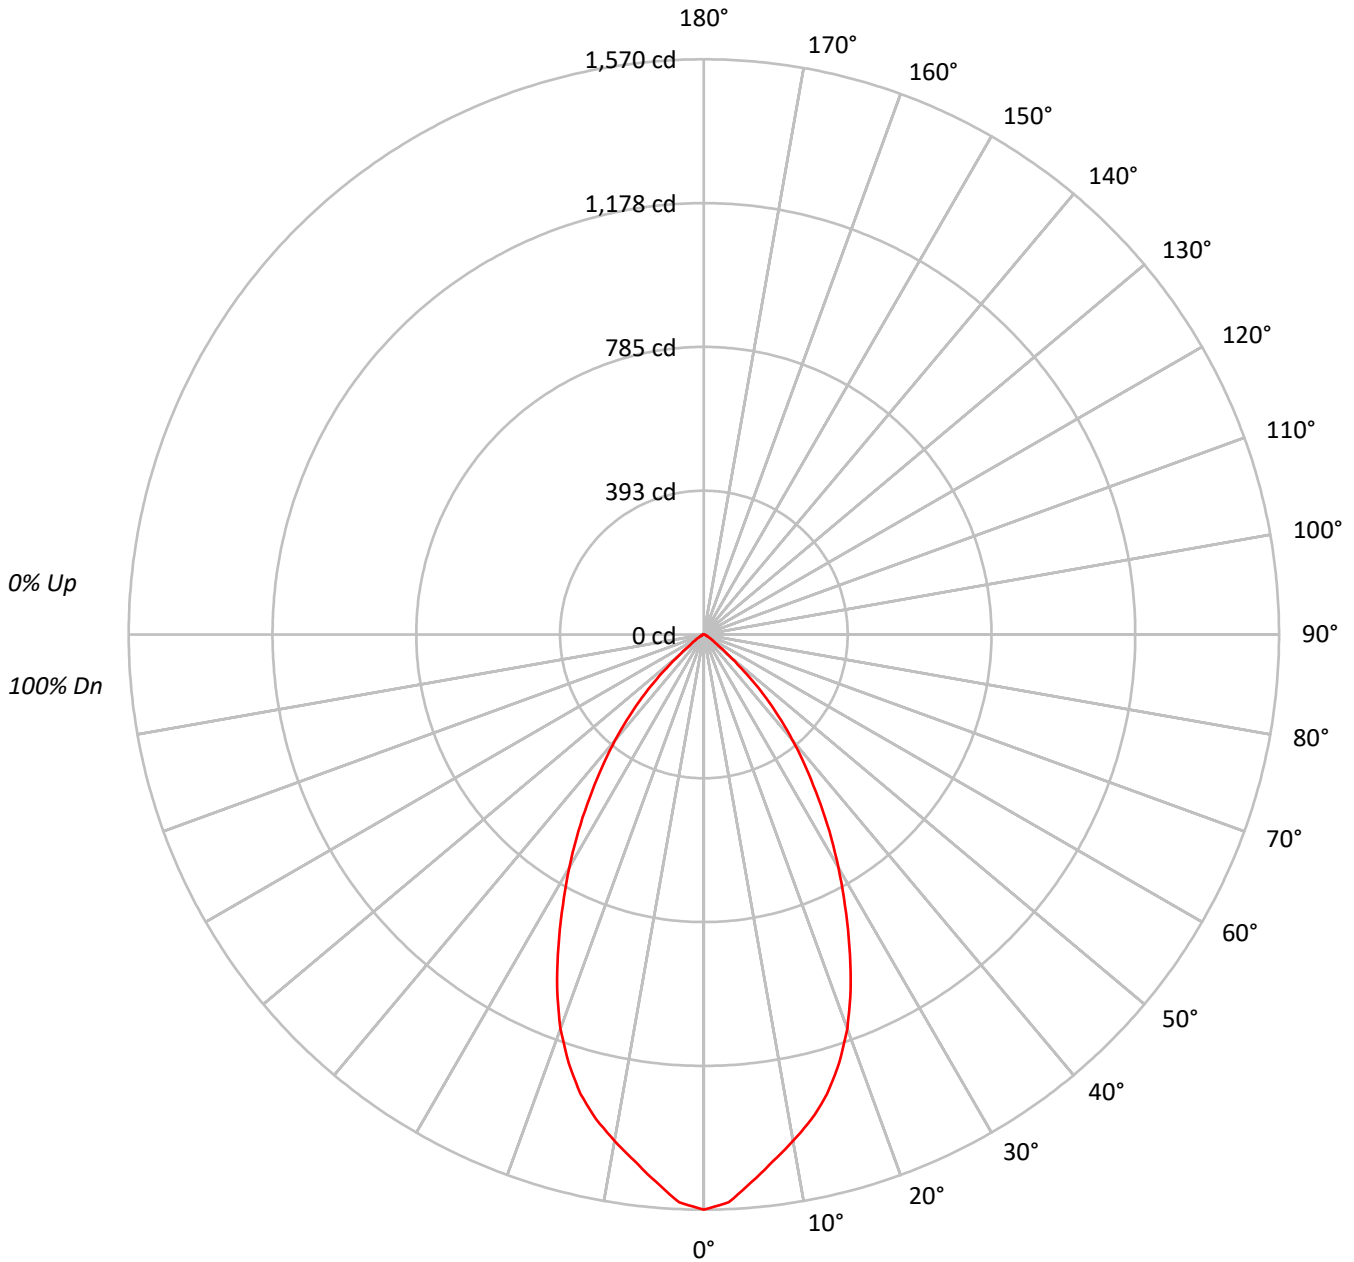



TEST NUMBER: P642146

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72	72	72
5	90	81	75	71	89	80	75	70	79	73	70	77	72	69	75	71	68	67	67	67	67
6	85	76	70	65	84	75	69	65	74	68	64	72	67	64	71	67	63	62	62	62	62
7	81	71	65	60	79	70	64	60	69	63	60	68	63	59	67	62	59	57	57	57	57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53	53	53	53
9	73	62	56	52	71	62	56	52	61	55	52	60	55	51	59	55	51	50	50	50	50
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	86062
5°	82539
10°	78127
15°	73735
20°	66780
25°	56864
30°	46469
35°	36319
40°	26929
45°	17606
50°	7548
55°	3154
60°	1732
65°	1025
70°	850
75°	847
80°	821
85°	818

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17606 cd/sqm



TEST NUMBER: P642146

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.2	9.4
10°-20°	361.6	24.2
20°-30°	429.4	28.8
30°-40°	339.9	22.8
40°-50°	172.8	11.6
50°-60°	35.1	2.4
60°-70°	8.5	0.6
70°-80°	3.8	0.3
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	931.2	62.4
0°-40°	1271.1	85.2
0°-60°	1479.1	99.1
0°-90°	1492.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1492.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1570	
5°	1500	140
15°	1299	362
25°	940	429
35°	543	340
45°	227	173
55°	33	35
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P642146

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1569.9
2.5°	1551.4
5°	1499.9
7.5°	1449.7
10°	1403.5
12.5°	1356.0
15°	1299.2
17.5°	1226.6
20°	1144.7
22.5°	1047.0
25°	940.1
27.5°	833.1
30°	734.1
32.5°	637.7
35°	542.7
37.5°	456.8
40°	376.3
42.5°	299.7
45°	227.1
47.5°	149.2
50°	88.5
52.5°	50.2
55°	33.0
57.5°	23.8
60°	15.8
62.5°	10.6
65°	7.9
67.5°	5.3
70°	5.3
72.5°	4.0
75°	4.0
77.5°	2.6
80°	2.6
82.5°	1.3
85°	1.3
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)