

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642150

Luminaire Tested: ML5612LSWFL5597FS1E - 692W - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642150
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-62)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 692W - 1200LM - 5000K
Description: ML56 RR, 55D TIR OPTIC, 6" WHITE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1697.3 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642150
CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 5000K

Luminous Intensity Polar Plot

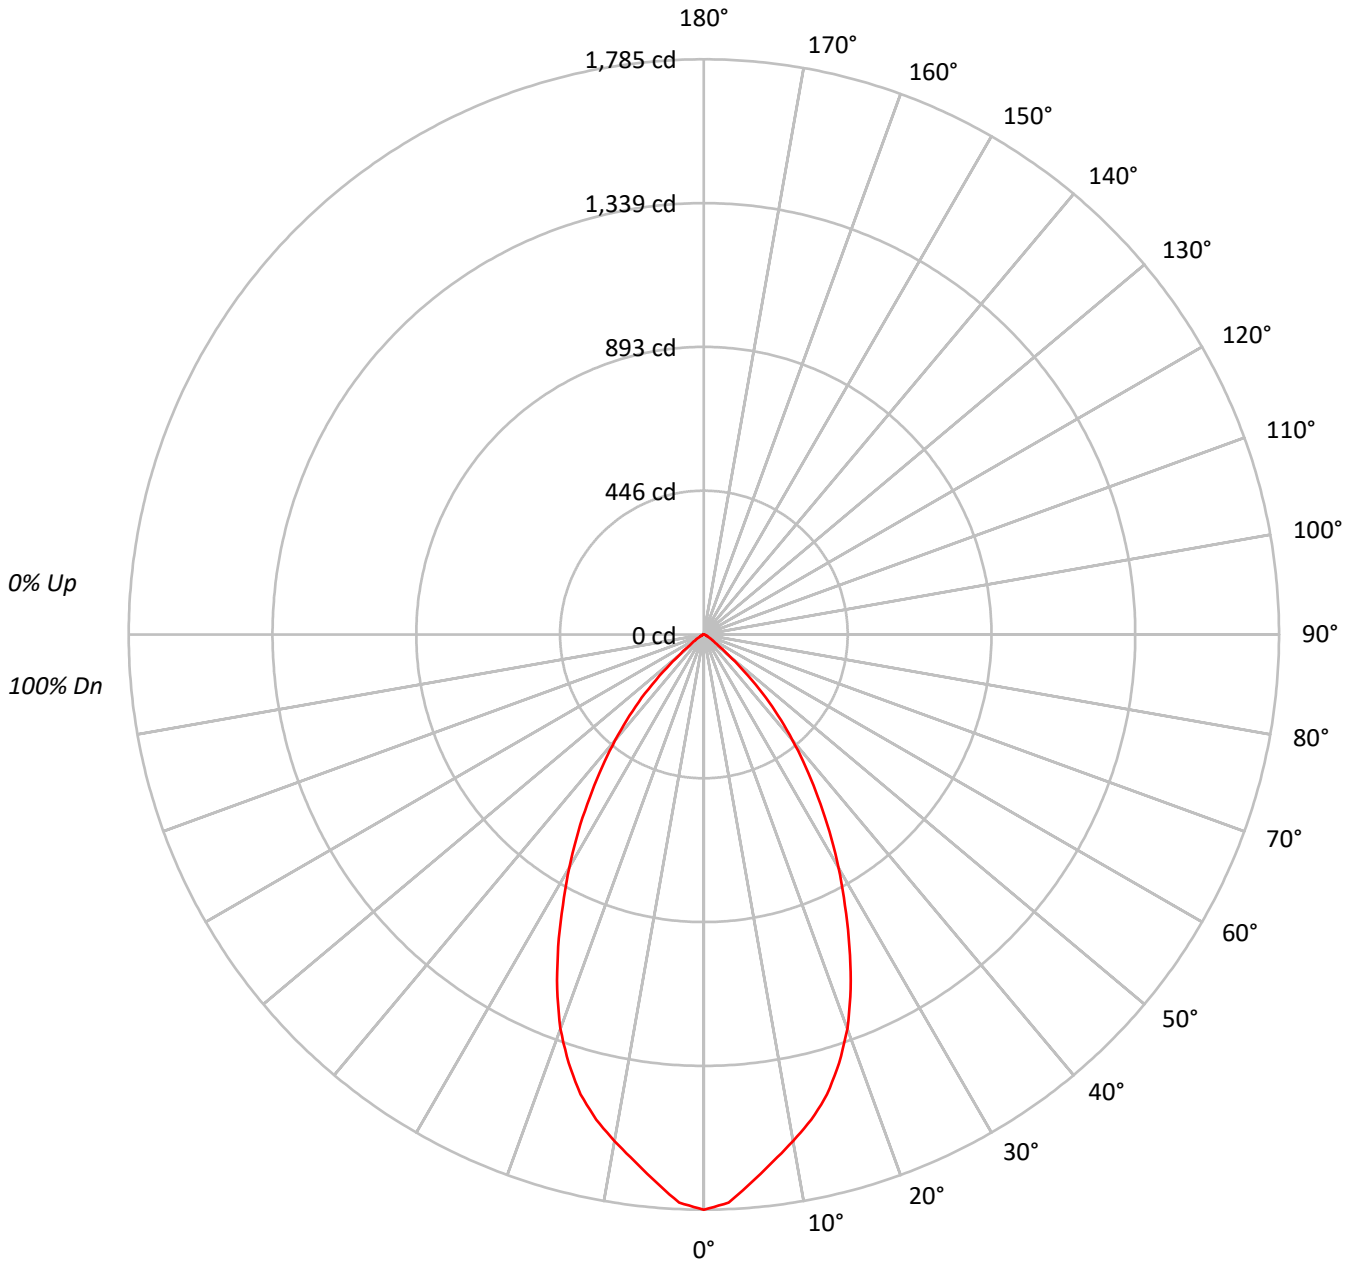



TEST NUMBER: P642150

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72	72	72
5	90	81	75	71	89	80	75	70	79	73	70	77	72	69	75	71	68	67	67	67	67
6	85	76	70	65	84	75	69	65	74	68	64	72	67	64	71	67	63	62	62	62	62
7	81	71	65	60	79	70	64	60	69	63	60	68	63	59	67	62	59	57	57	57	57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53	53	53	53
9	73	62	56	52	71	62	56	52	61	55	52	60	55	51	59	55	51	50	50	50	50
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	97876
5°	93869
10°	88854
15°	83860
20°	75951
25°	64667
30°	52850
35°	41305
40°	30629
45°	20025
50°	8580
55°	3584
60°	1974
65°	1167
70°	962
75°	953
80°	947
85°	943

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20025 cd/sqm



TEST NUMBER: P642150

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.4	9.4
10°-20°	411.3	24.2
20°-30°	488.3	28.8
30°-40°	386.6	22.8
40°-50°	196.5	11.6
50°-60°	39.9	2.4
60°-70°	9.6	0.6
70°-80°	4.4	0.3
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1059.1	62.4
0°-40°	1445.7	85.2
0°-60°	1682.1	99.1
0°-90°	1697.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1697.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1785	
5°	1706	159
15°	1478	411
25°	1069	488
35°	617	387
45°	258	197
55°	38	40
65°	9	10
75°	4	4
85°	2	1
90°	0	



TEST NUMBER: P642150
CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1785.4
2.5°	1764.4
5°	1705.8
7.5°	1648.7
10°	1596.2
12.5°	1542.1
15°	1477.6
17.5°	1395.0
20°	1301.9
22.5°	1190.8
25°	1069.1
27.5°	947.5
30°	834.9
32.5°	725.3
35°	617.2
37.5°	519.5
40°	428.0
42.5°	340.9
45°	258.3
47.5°	169.7
50°	100.6
52.5°	57.1
55°	37.5
57.5°	27.0
60°	18.0
62.5°	12.0
65°	9.0
67.5°	6.0
70°	6.0
72.5°	4.5
75°	4.5
77.5°	3.0
80°	3.0
82.5°	1.5
85°	1.5
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)