

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642160

Luminaire Tested: ML5612LSWFL5597FS1E - 692W - 900LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642160  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-62)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSWFL5597FS1E - 692W - 900LM - 5000K  
Description: ML56 RR, 55D TIR OPTIC, 6" WHITE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1402.1 lumens  
Efficiency: N/A  
Efficacy: 105.4 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642160  
CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 900LM - 5000K

### Luminous Intensity Polar Plot

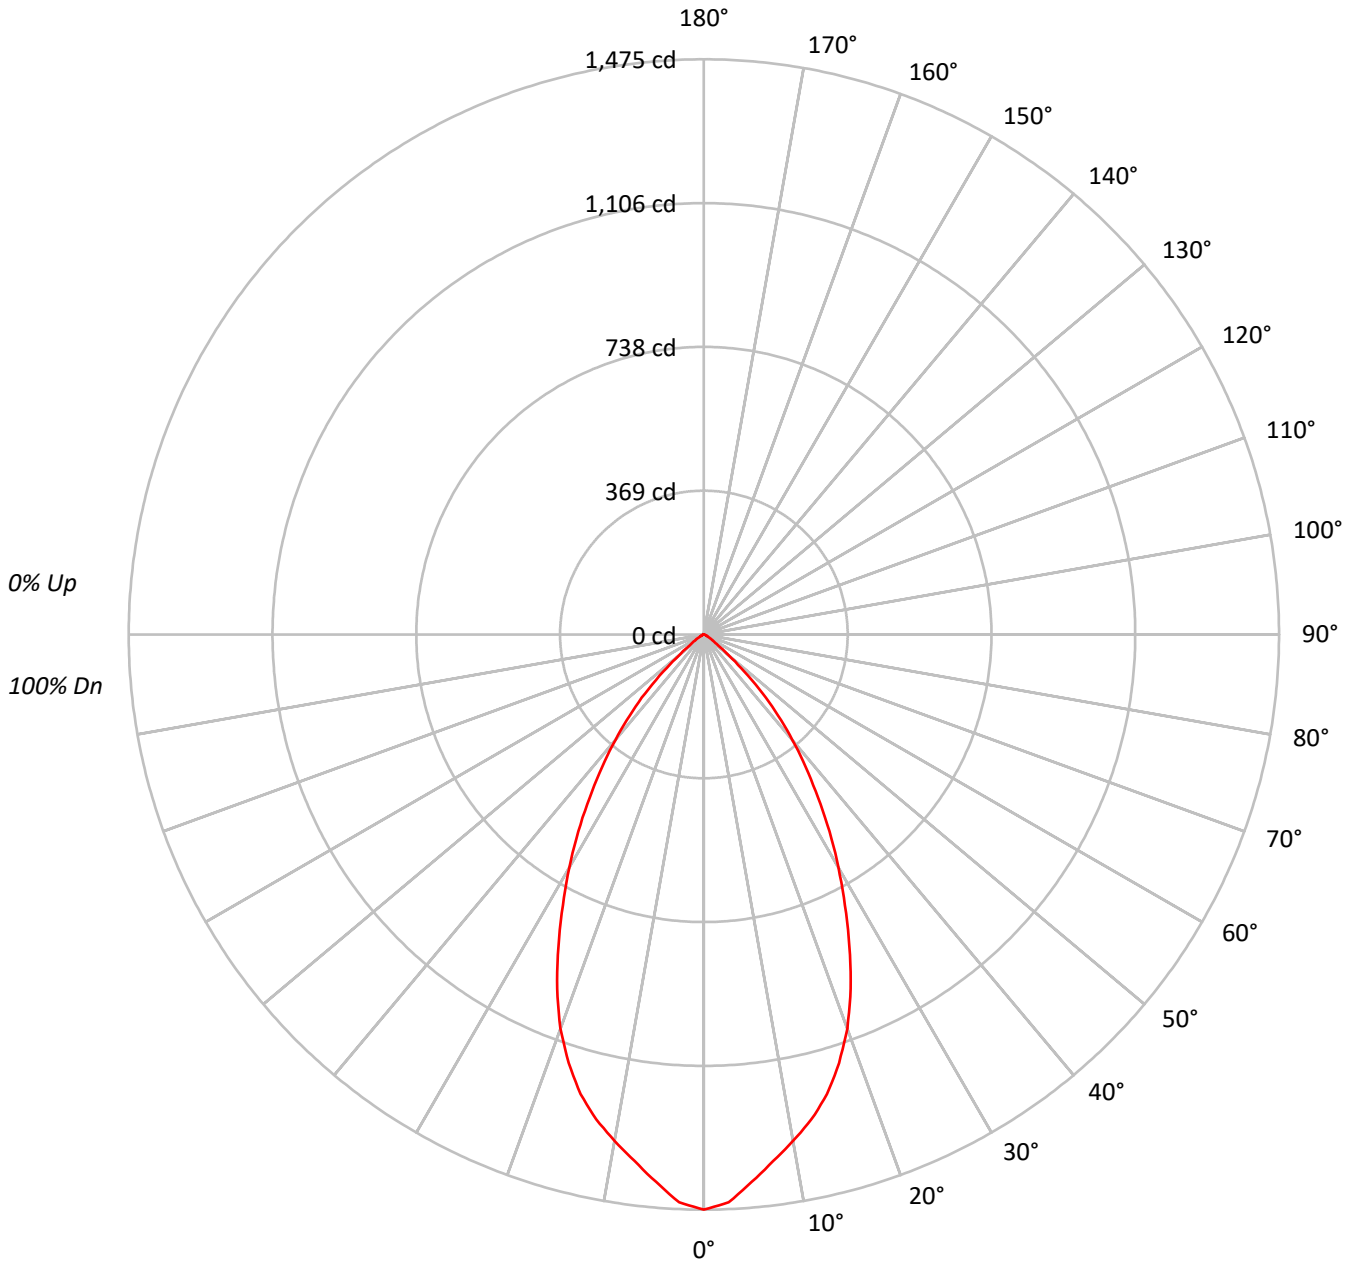



TEST NUMBER: P642160

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 900LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93															
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85															
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79				79															
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72				72															
5	90	81	75	71	89	80	75	70	79	73	70	77	72	69	75	71	68	67				67															
6	85	76	70	65	84	75	69	65	74	68	64	72	67	64	71	67	63	62				62															
7	81	71	65	60	79	70	64	60	69	63	60	68	63	59	67	62	59	57				57															
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53				53															
9	73	62	56	52	71	62	56	52	61	55	52	60	55	51	59	55	51	50				50															
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47				47															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	80849
5°	77542
10°	73401
15°	69274
20°	62737
25°	53422
30°	43659
35°	34117
40°	25297
45°	16544
50°	7087
55°	2963
60°	1634
65°	960
70°	801
75°	784
80°	789
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16544 cd/sqm



TEST NUMBER: P642160

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 900LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	131.7	9.4
10°-20°	339.8	24.2
20°-30°	403.4	28.8
30°-40°	319.3	22.8
40°-50°	162.3	11.6
50°-60°	33.0	2.4
60°-70°	7.9	0.6
70°-80°	3.6	0.3
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	874.9	62.4
0°-40°	1194.2	85.2
0°-60°	1389.5	99.1
0°-90°	1402.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1402.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1475	
5°	1409	132
15°	1221	340
25°	883	403
35°	510	319
45°	213	162
55°	31	33
65°	7	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P642160

CATALOG NUMBER: ML5612LSWFL5597FS1E - 692W - 900LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1474.8
2.5°	1457.5
5°	1409.1
7.5°	1362.0
10°	1318.6
12.5°	1273.9
15°	1220.6
17.5°	1152.3
20°	1075.4
22.5°	983.6
25°	883.2
27.5°	782.7
30°	689.7
32.5°	599.1
35°	509.8
37.5°	429.2
40°	353.5
42.5°	281.6
45°	213.4
47.5°	140.2
50°	83.1
52.5°	47.1
55°	31.0
57.5°	22.3
60°	14.9
62.5°	9.9
65°	7.4
67.5°	5.0
70°	5.0
72.5°	3.7
75°	3.7
77.5°	2.5
80°	2.5
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)