

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642171

Luminaire Tested: ML5612LSWFL5597FS1E - 693BB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642171
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-64)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 693BB - 900LM - 2700K
Description: ML56 RR, 55D TIR OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1205.6 lumens
Efficiency: N/A
Efficacy: 90.6 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642171
CATALOG NUMBER: ML5612LSWFL5597FS1E - 693BB - 900LM - 2700K

Luminous Intensity Polar Plot

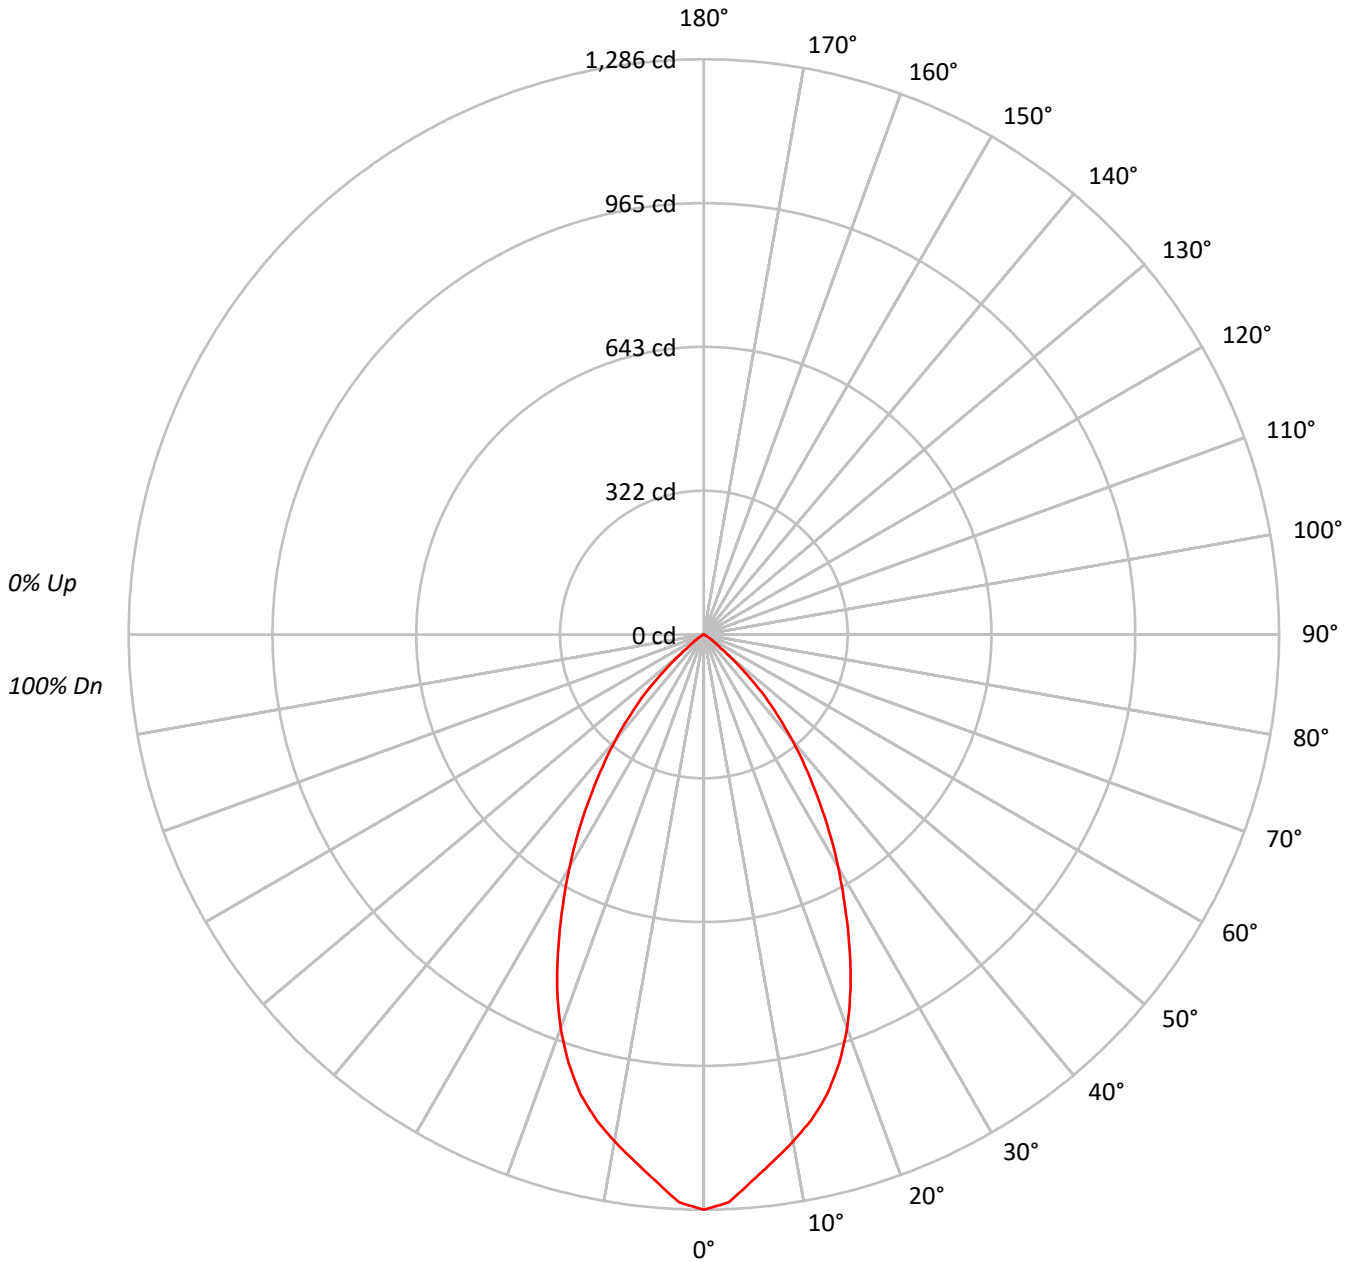



TEST NUMBER: P642171

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693BB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93			93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86			86
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79			79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73			73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67			67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62			62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58			58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	55	54			54
9	73	63	57	53	72	62	56	52	61	56	52	61	56	52	60	55	52	50			50
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70499
5°	67521
10°	64049
15°	60409
20°	54646
25°	46551
30°	38006
35°	29587
40°	21877
45°	14219
50°	5868
55°	2189
60°	954
65°	143
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14219 cd/sqm



TEST NUMBER: P642171

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693BB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.8	9.5
10°-20°	296.3	24.6
20°-30°	351.5	29.2
30°-40°	277.0	23.0
40°-50°	139.2	11.5
50°-60°	24.6	2.0
60°-70°	2.1	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	762.6	63.3
0°-40°	1039.7	86.2
0°-60°	1203.5	99.8
0°-90°	1205.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1205.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1286	
5°	1227	115
15°	1064	296
25°	770	351
35°	442	277
45°	183	139
55°	23	25
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642171

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693BB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1286.0
2.5°	1270.7
5°	1227.0
7.5°	1187.7
10°	1150.6
12.5°	1111.3
15°	1064.4
17.5°	1005.4
20°	936.7
22.5°	857.0
25°	769.6
27.5°	682.3
30°	600.4
32.5°	520.7
35°	442.1
37.5°	371.2
40°	305.7
42.5°	242.4
45°	183.4
47.5°	119.0
50°	68.8
52.5°	36.0
55°	22.9
57.5°	14.2
60°	8.7
62.5°	3.3
65°	1.1
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)