

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642182

Luminaire Tested: ML5612LSWFL5597FS1E - 693SNB - 600LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642182
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-65)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 693SNB - 600LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 6" SATIN NICKLE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 979.7 lumens
Efficiency: N/A
Efficacy: 95.1 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642182

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693SNB - 600LM - 3000K

Luminous Intensity Polar Plot

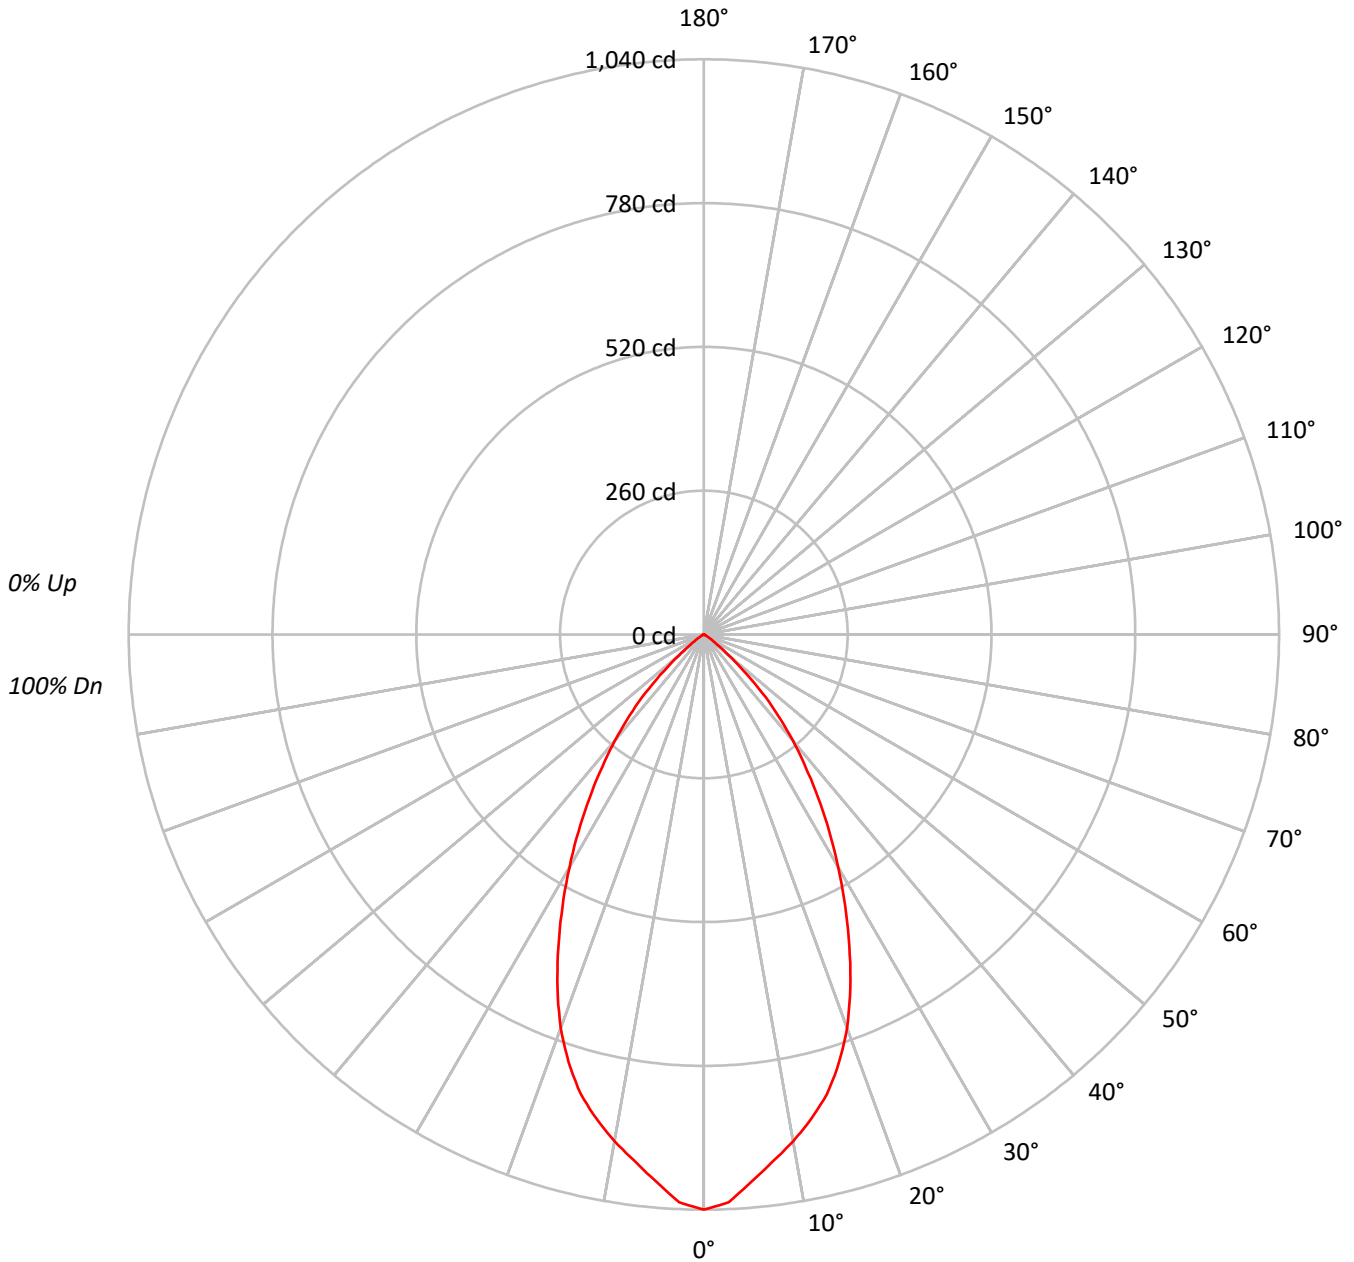



TEST NUMBER: P642182

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693SNB - 600LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93			93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86			86
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79			79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73			73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	69	76	72	69	67			67
6	86	76	70	65	84	75	70	65	74	69	65	72	68	64	71	67	64	62			62
7	81	71	65	60	80	71	65	60	69	64	60	68	63	60	67	63	59	58			58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	55	54			54
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	49	56	52	48	47			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	57002
5°	54622
10°	51792
15°	48831
20°	44168
25°	37641
30°	30752
35°	24072
40°	17855
45°	11606
50°	4998
55°	1845
60°	866
65°	233
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11606 cd/sqm



TEST NUMBER: P642182

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693SNB - 600LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.9	9.5
10°-20°	239.4	24.4
20°-30°	284.3	29.0
30°-40°	225.0	23.0
40°-50°	114.2	11.7
50°-60°	21.4	2.2
60°-70°	2.5	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	616.6	62.9
0°-40°	841.6	85.9
0°-60°	977.2	99.7
0°-90°	979.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	979.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1040	
5°	993	93
15°	860	239
25°	622	284
35°	360	225
45°	150	114
55°	19	21
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642182

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693SNB - 600LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1039.8
2.5°	1027.6
5°	992.6
7.5°	960.2
10°	930.4
12.5°	897.1
15°	860.4
17.5°	812.2
20°	757.1
22.5°	692.3
25°	622.3
27.5°	553.2
30°	485.8
32.5°	421.9
35°	359.7
37.5°	302.0
40°	249.5
42.5°	198.7
45°	149.7
47.5°	98.0
50°	58.6
52.5°	31.5
55°	19.3
57.5°	13.1
60°	7.9
62.5°	3.5
65°	1.8
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)