

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642237

Luminaire Tested: ML5612LSWFL5597FS1E - 694WB - 1200LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642237
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-67)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 694WB - 1200LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1544.5 lumens
Efficiency: N/A
Efficacy: 93.6 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642237

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 1200LM - 3000K

Luminous Intensity Polar Plot

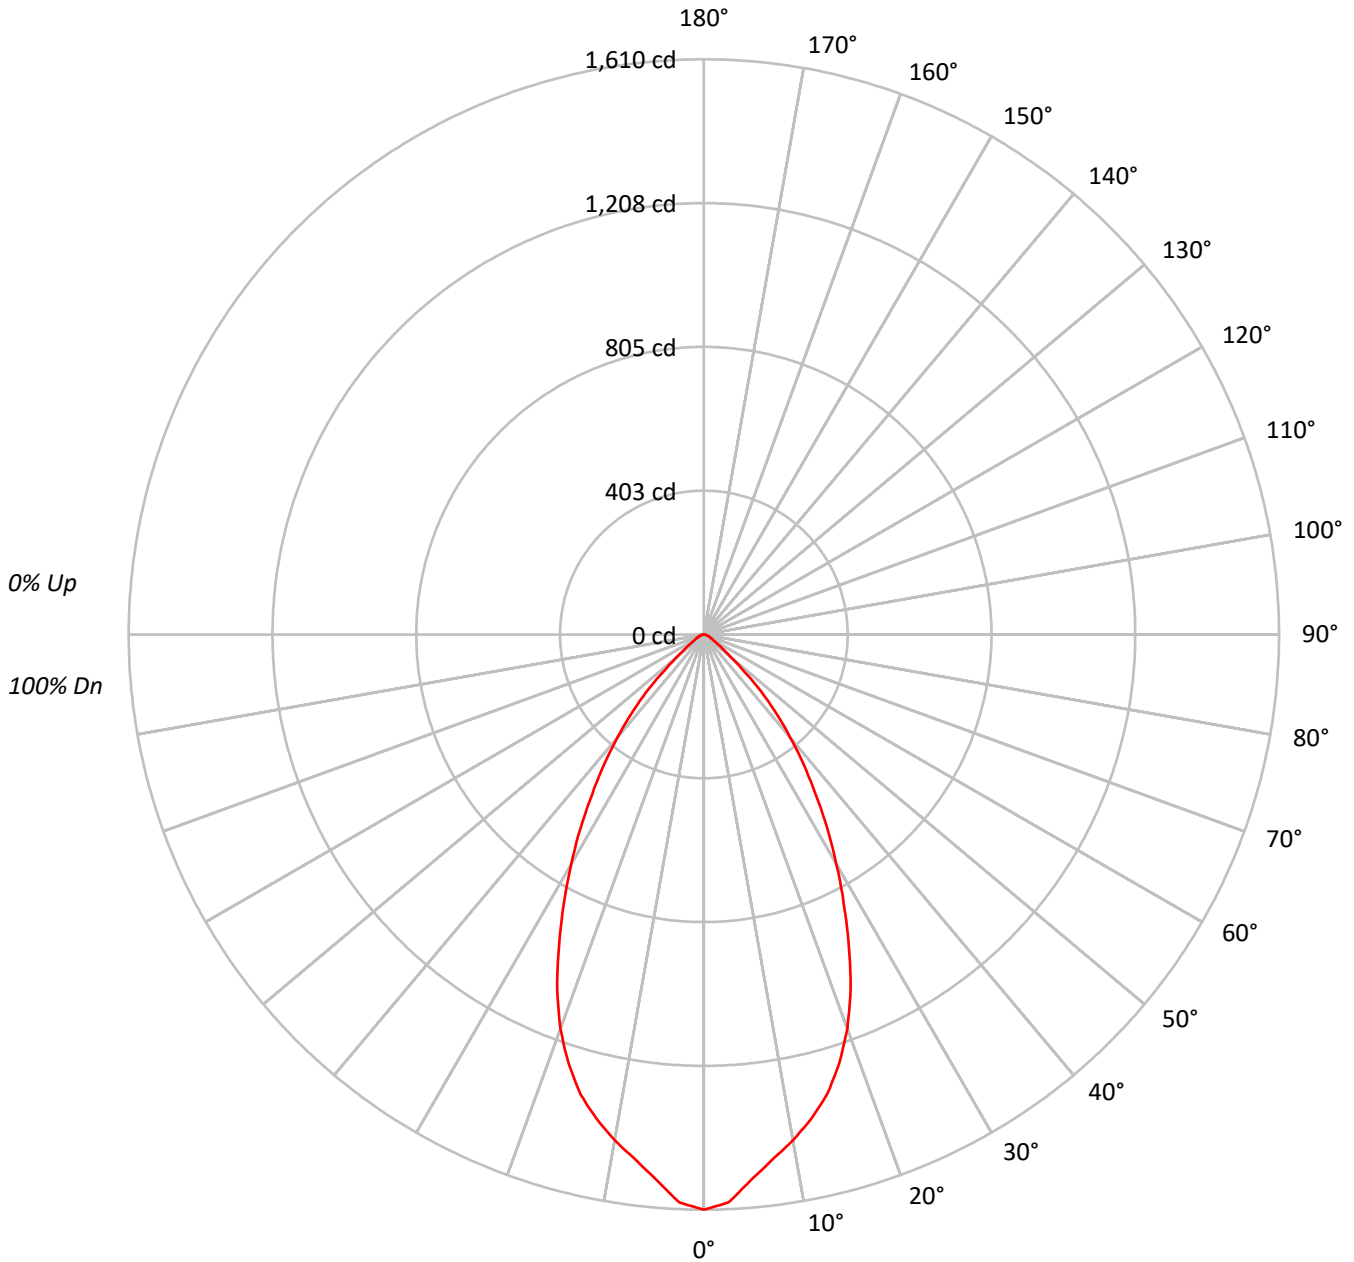



TEST NUMBER: P642237

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 1200LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	81	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	63	59	68	63	59	67	62	58	66	61	58	57	57	57	57
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53	53	53	53
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49	49	49	49
10	69	58	52	48	68	58	52	48	57	51	48	56	51	48	55	51	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	88255
5°	84256
10°	80009
15°	75636
20°	68478
25°	58013
30°	46957
35°	36460
40°	26929
45°	17692
50°	8571
55°	4540
60°	3125
65°	2465
70°	2180
75°	1440
80°	852
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17692 cd/sqm



TEST NUMBER: P642237

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 1200LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	143.3	9.3
10°-20°	370.8	24.0
20°-30°	438.1	28.4
30°-40°	341.7	22.1
40°-50°	174.6	11.3
50°-60°	47.7	3.1
60°-70°	19.6	1.3
70°-80°	7.9	0.5
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	952.3	61.7
0°-40°	1294.0	83.8
0°-60°	1516.3	98.2
0°-90°	1544.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1544.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1610	
5°	1531	143
15°	1333	371
25°	959	438
35°	545	342
45°	228	175
55°	48	48
65°	19	20
75°	7	8
85°	0	1
90°	0	



TEST NUMBER: P642237

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 1200LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1609.9
2.5°	1590.8
5°	1531.1
7.5°	1480.8
10°	1437.3
12.5°	1388.4
15°	1332.7
17.5°	1259.4
20°	1173.8
22.5°	1073.2
25°	959.1
27.5°	847.7
30°	741.8
32.5°	642.6
35°	544.8
37.5°	457.8
40°	376.3
42.5°	300.2
45°	228.2
47.5°	150.8
50°	100.5
52.5°	67.9
55°	47.5
57.5°	35.3
60°	28.5
62.5°	23.1
65°	19.0
67.5°	16.3
70°	13.6
72.5°	9.5
75°	6.8
77.5°	5.4
80°	2.7
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)