

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642247

Luminaire Tested: ML5612LSWFL5597FS1E - 694WB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642247
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-67)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 694WB - 900LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1275.9 lumens
Efficiency: N/A
Efficacy: 95.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642247
CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 900LM - 3000K

Luminous Intensity Polar Plot

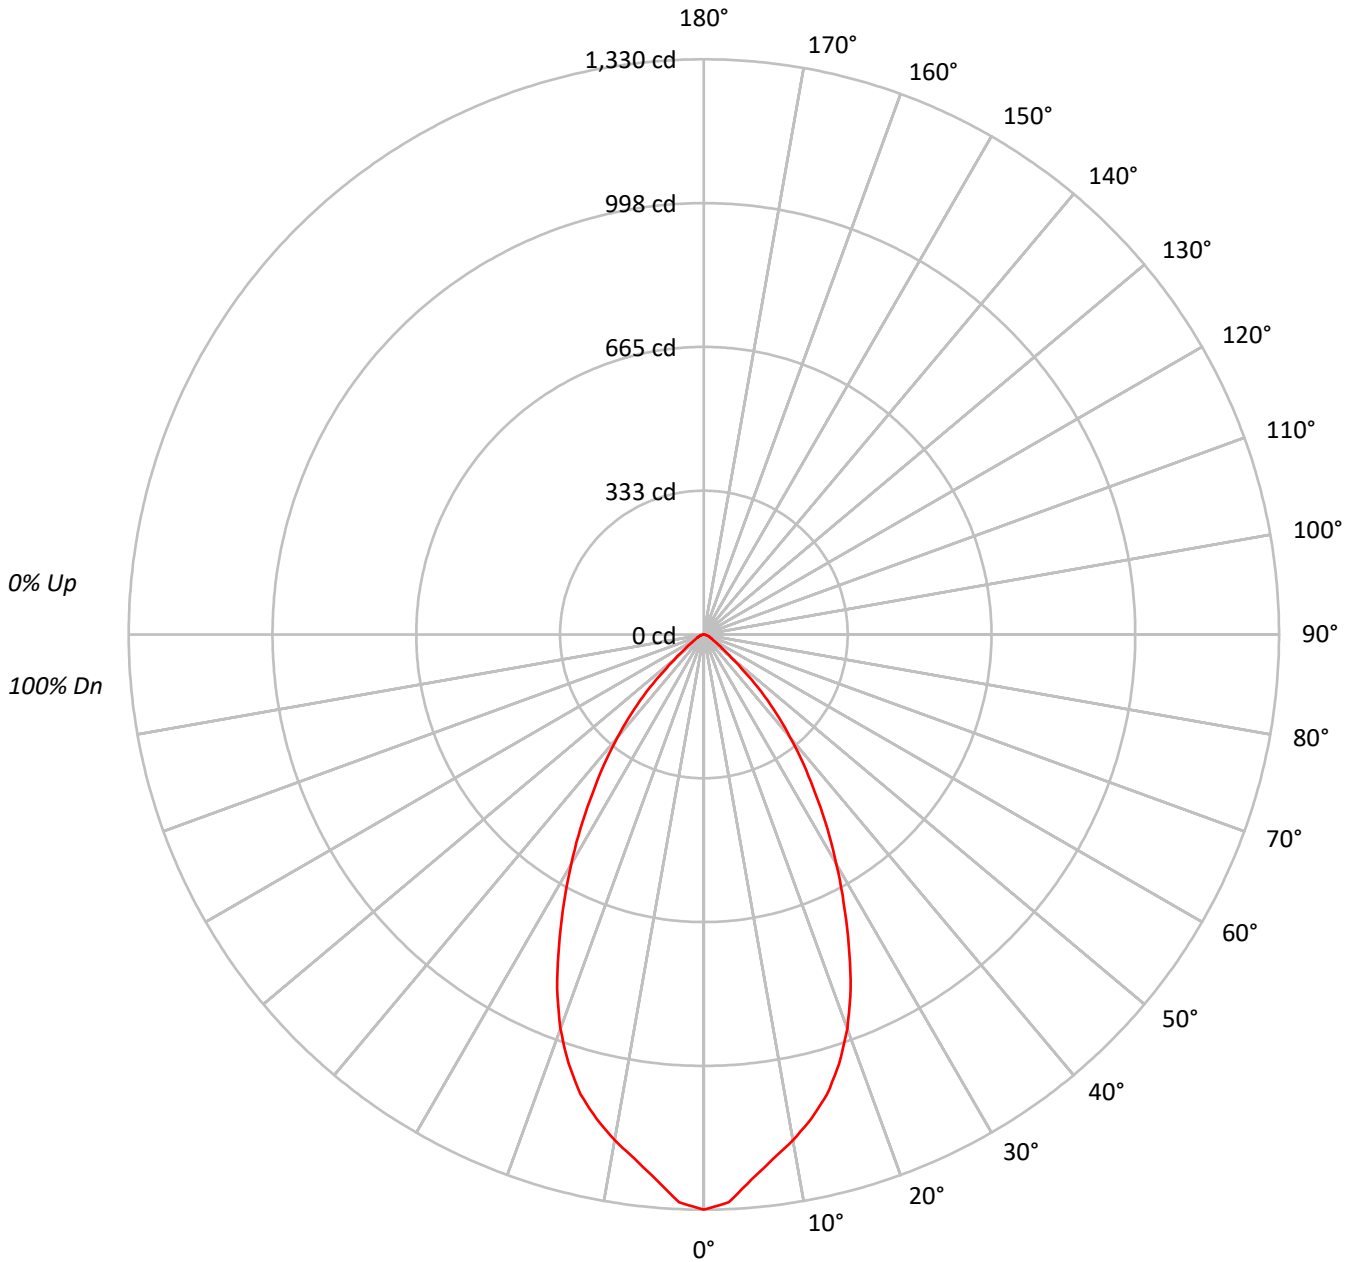



TEST NUMBER: P642247

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92																											
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85																											
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78																											
4	95	87	81	76	93	86	80	76	84	79	75	81	77	74	80	76	73	72																											
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																											
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	63	61																											
7	80	70	64	59	79	70	63	59	68	63	59	67	62	58	66	61	58	57																											
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53																											
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49																											
10	69	58	52	48	68	58	52	48	57	51	48	56	51	48	55	51	47	46																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	72900
5°	69601
10°	66092
15°	62480
20°	56565
25°	47924
30°	38784
35°	30115
40°	22249
45°	14614
50°	7079
55°	3756
60°	2588
65°	2037
70°	1795
75°	1186
80°	695
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14614 cd/sqm



TEST NUMBER: P642247

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.4	9.3
10°-20°	306.3	24.0
20°-30°	361.9	28.4
30°-40°	282.2	22.1
40°-50°	144.3	11.3
50°-60°	39.4	3.1
60°-70°	16.2	1.3
70°-80°	6.5	0.5
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	786.7	61.7
0°-40°	1068.9	83.8
0°-60°	1252.6	98.2
0°-90°	1275.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1275.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1330	
5°	1265	118
15°	1101	306
25°	792	362
35°	450	282
45°	188	144
55°	39	39
65°	16	16
75°	6	7
85°	0	1
90°	0	



TEST NUMBER: P642247

CATALOG NUMBER: ML5612LSWFL5597FS1E - 694WB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1329.8
2.5°	1314.1
5°	1264.8
7.5°	1223.2
10°	1187.3
12.5°	1146.9
15°	1100.9
17.5°	1040.3
20°	969.6
22.5°	886.6
25°	792.3
27.5°	700.3
30°	612.7
32.5°	530.8
35°	450.0
37.5°	378.2
40°	310.9
42.5°	248.0
45°	188.5
47.5°	124.6
50°	83.0
52.5°	56.1
55°	39.3
57.5°	29.2
60°	23.6
62.5°	19.1
65°	15.7
67.5°	13.5
70°	11.2
72.5°	7.9
75°	5.6
77.5°	4.5
80°	2.2
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)