

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642257

Luminaire Tested: ML5612LSWFL5597FS1E - 696WB - 600LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642257
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-69)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 696WB - 600LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 6" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 992.8 lumens
Efficiency: N/A
Efficacy: 96.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642257
CATALOG NUMBER: ML5612LSWFL5597FS1E - 696WB - 600LM - 3000K

Luminous Intensity Polar Plot

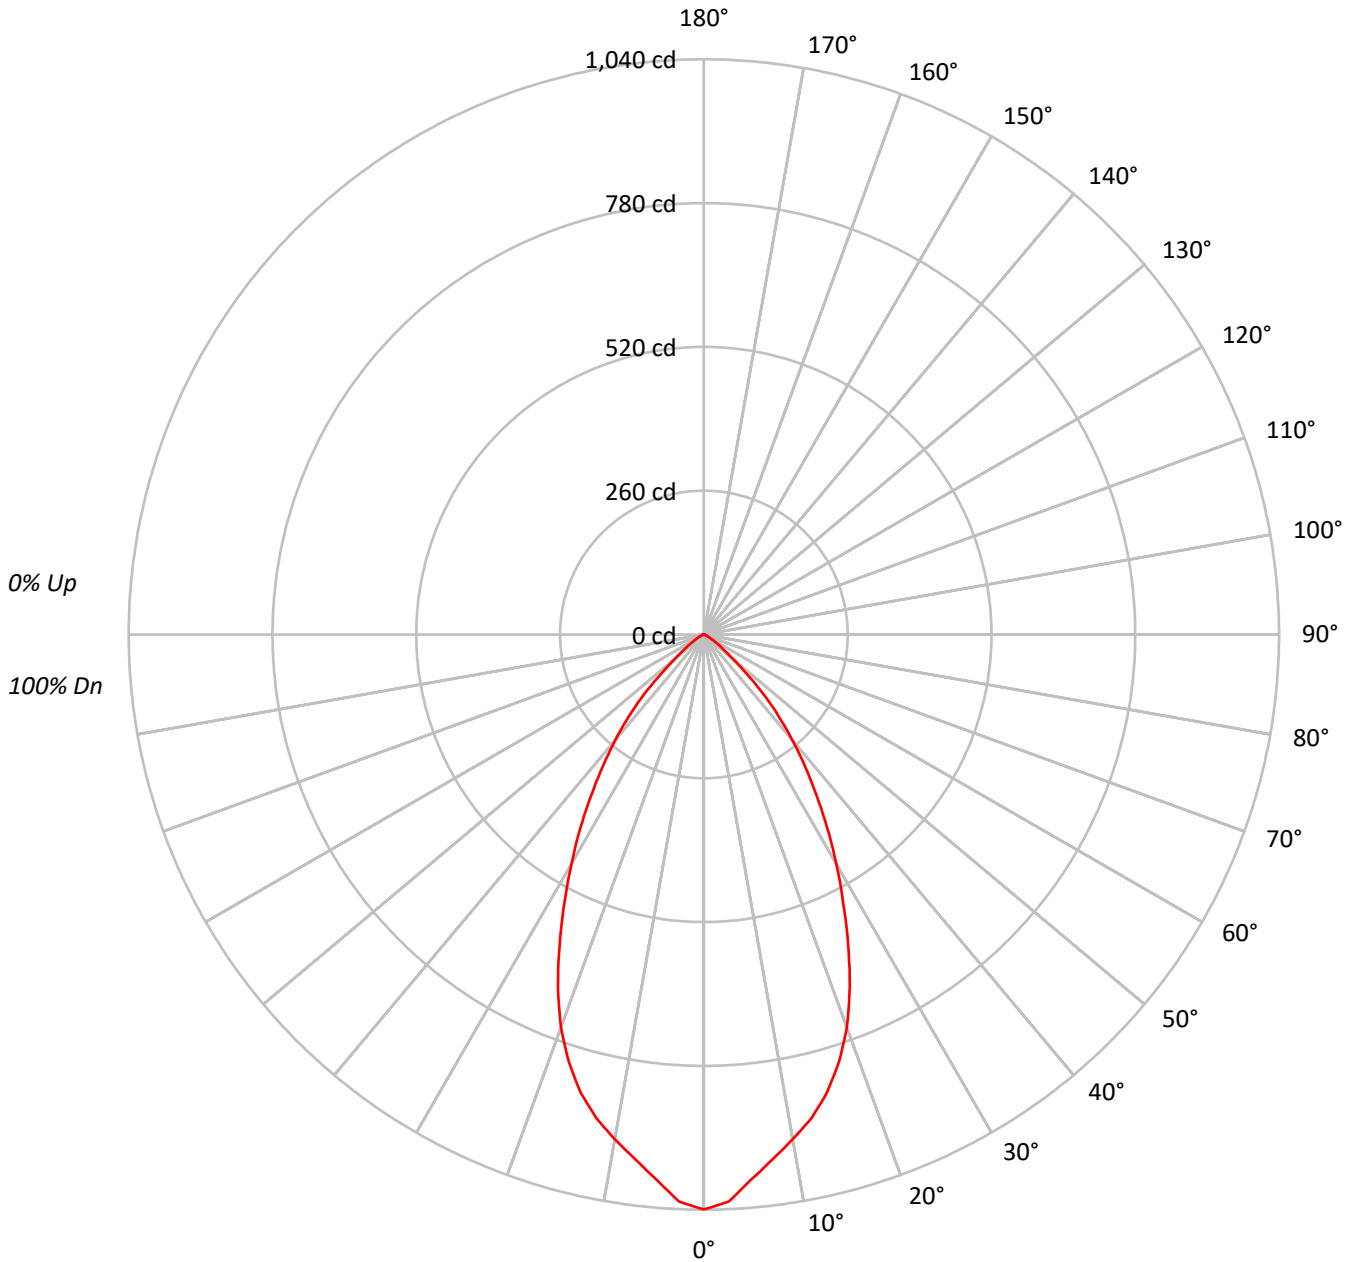



TEST NUMBER: P642257

CATALOG NUMBER: ML5612LSWFL5597FS1E - 696WB - 600LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93																
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			85																
3	101	94	89	84	99	93	88	84	90	86	82	88	84	81	85	82	80	78			78																
4	95	87	81	77	93	86	81	76	84	79	75	82	78	74	80	76	74	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			66																
6	85	76	69	65	84	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	80	71	64	60	79	70	64	59	69	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	52	71	62	56	51	61	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56986
5°	54413
10°	51580
15°	48718
20°	44104
25°	37315
30°	30296
35°	23718
40°	17783
45°	11869
50°	5748
55°	3011
60°	1535
65°	1025
70°	417
75°	381
80°	284
85°	566

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11869 cd/sqm



TEST NUMBER: P642257

CATALOG NUMBER: ML5612LSWFL5597FS1E - 696WB - 600LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.5	9.3
10°-20°	239.0	24.1
20°-30°	281.9	28.4
30°-40°	222.3	22.4
40°-50°	116.5	11.7
50°-60°	30.5	3.1
60°-70°	7.6	0.8
70°-80°	1.9	0.2
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	613.4	61.8
0°-40°	835.7	84.2
0°-60°	982.7	99.0
0°-90°	992.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	992.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1040	
5°	989	93
15°	858	239
25°	617	282
35°	354	222
45°	153	117
55°	32	30
65°	8	8
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P642257

CATALOG NUMBER: ML5612LSWFL5597FS1E - 696WB - 600LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1039.5
2.5°	1026.4
5°	988.8
7.5°	956.4
10°	926.6
12.5°	896.0
15°	858.4
17.5°	811.1
20°	756.0
22.5°	689.5
25°	616.9
27.5°	545.1
30°	478.6
32.5°	415.6
35°	354.4
37.5°	300.1
40°	248.5
42.5°	199.5
45°	153.1
47.5°	101.5
50°	67.4
52.5°	45.5
55°	31.5
57.5°	20.1
60°	14.0
62.5°	10.5
65°	7.9
67.5°	4.4
70°	2.6
72.5°	1.8
75°	1.8
77.5°	1.8
80°	0.9
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)