

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642406

Luminaire Tested: ML5615LSFL409FS1E - 592W - 1500LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642406  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-27)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSFL409FS1E - 592W - 1500LM - 2700K  
Description: ML56 RR, 40D TIR OPTIC, 5" WHITE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1768.0 lumens  
Efficiency: N/A  
Efficacy: 103.4 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642406  
CATALOG NUMBER: ML5615LSFL409FS1E - 592W - 1500LM - 2700K

### Luminous Intensity Polar Plot

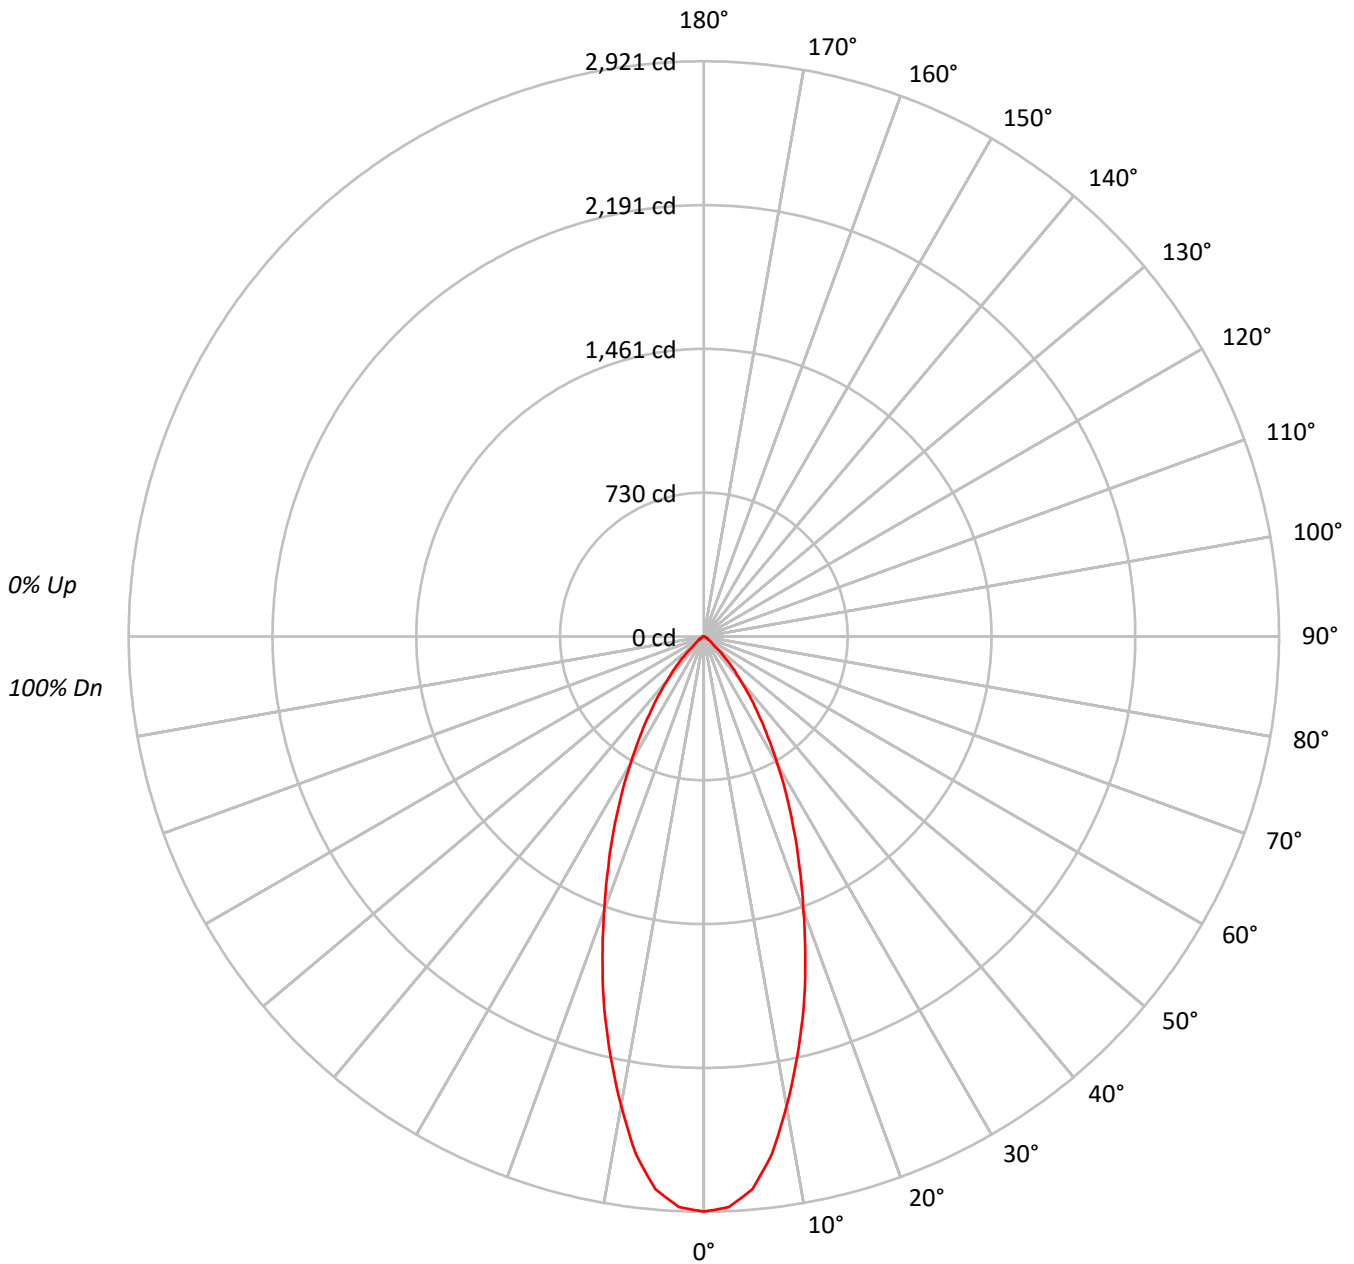



TEST NUMBER: P642406

CATALOG NUMBER: ML5615LSFL409FS1E - 592W - 1500LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	82	79	83	80	78	76																			
5	93	85	79	75	92	84	79	75	82	78	74	81	77	73	79	76	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	85	76	70	66	83	75	69	66	74	69	65	73	68	65	71	68	65	63																			
8	81	72	66	62	80	71	66	62	70	65	61	69	64	61	68	64	61	60																			
9	77	68	62	58	76	67	62	58	67	62	58	66	61	58	65	61	58	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	54																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	230571
5°	223321
10°	193984
15°	159774
20°	124121
25°	94148
30°	68046
35°	46614
40°	29328
45°	17192
50°	6877
55°	4500
60°	3189
65°	2036
70°	1800
75°	1891
80°	2137
85°	1449

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17192 cd/sqm



TEST NUMBER: P642406

CATALOG NUMBER: ML5615LSFL409FS1E - 592W - 1500LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	256.0	14.5
10°-20°	539.3	30.5
20°-30°	495.5	28.0
30°-40°	305.9	17.3
40°-50°	119.6	6.8
50°-60°	30.9	1.7
60°-70°	12.3	0.7
70°-80°	6.2	0.3
80°-90°	2.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1290.8	73.0
0°-40°	1596.7	90.3
0°-60°	1747.2	98.8
0°-90°	1768.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1768.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2921	
5°	2818	256
15°	1955	539
25°	1081	495
35°	484	306
45°	154	120
55°	33	31
65°	11	12
75°	6	6
85°	2	2
90°	0	



TEST NUMBER: P642406

CATALOG NUMBER: ML5615LSFL409FS1E - 592W - 1500LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2920.8
2.5°	2900.6
5°	2818.2
7.5°	2650.2
10°	2420.0
12.5°	2186.7
15°	1955.0
17.5°	1712.4
20°	1477.5
22.5°	1269.1
25°	1080.9
27.5°	905.2
30°	746.5
32.5°	605.0
35°	483.7
37.5°	379.5
40°	284.6
42.5°	217.7
45°	154.0
47.5°	88.7
50°	56.0
52.5°	43.5
55°	32.7
57.5°	24.9
60°	20.2
62.5°	17.1
65°	10.9
67.5°	7.8
70°	7.8
72.5°	6.2
75°	6.2
77.5°	4.7
80°	4.7
82.5°	3.1
85°	1.6
87.5°	1.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)