

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642457

Luminaire Tested: ML5615LSFL409FS1E - 593TBZB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642457
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-31)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 593TBZB - 900LM - 3000K
Description: ML56 RR, 40D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1142.7 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642457

CATALOG NUMBER: ML5615LSFL409FS1E - 593TBZB - 900LM - 3000K

Luminous Intensity Polar Plot

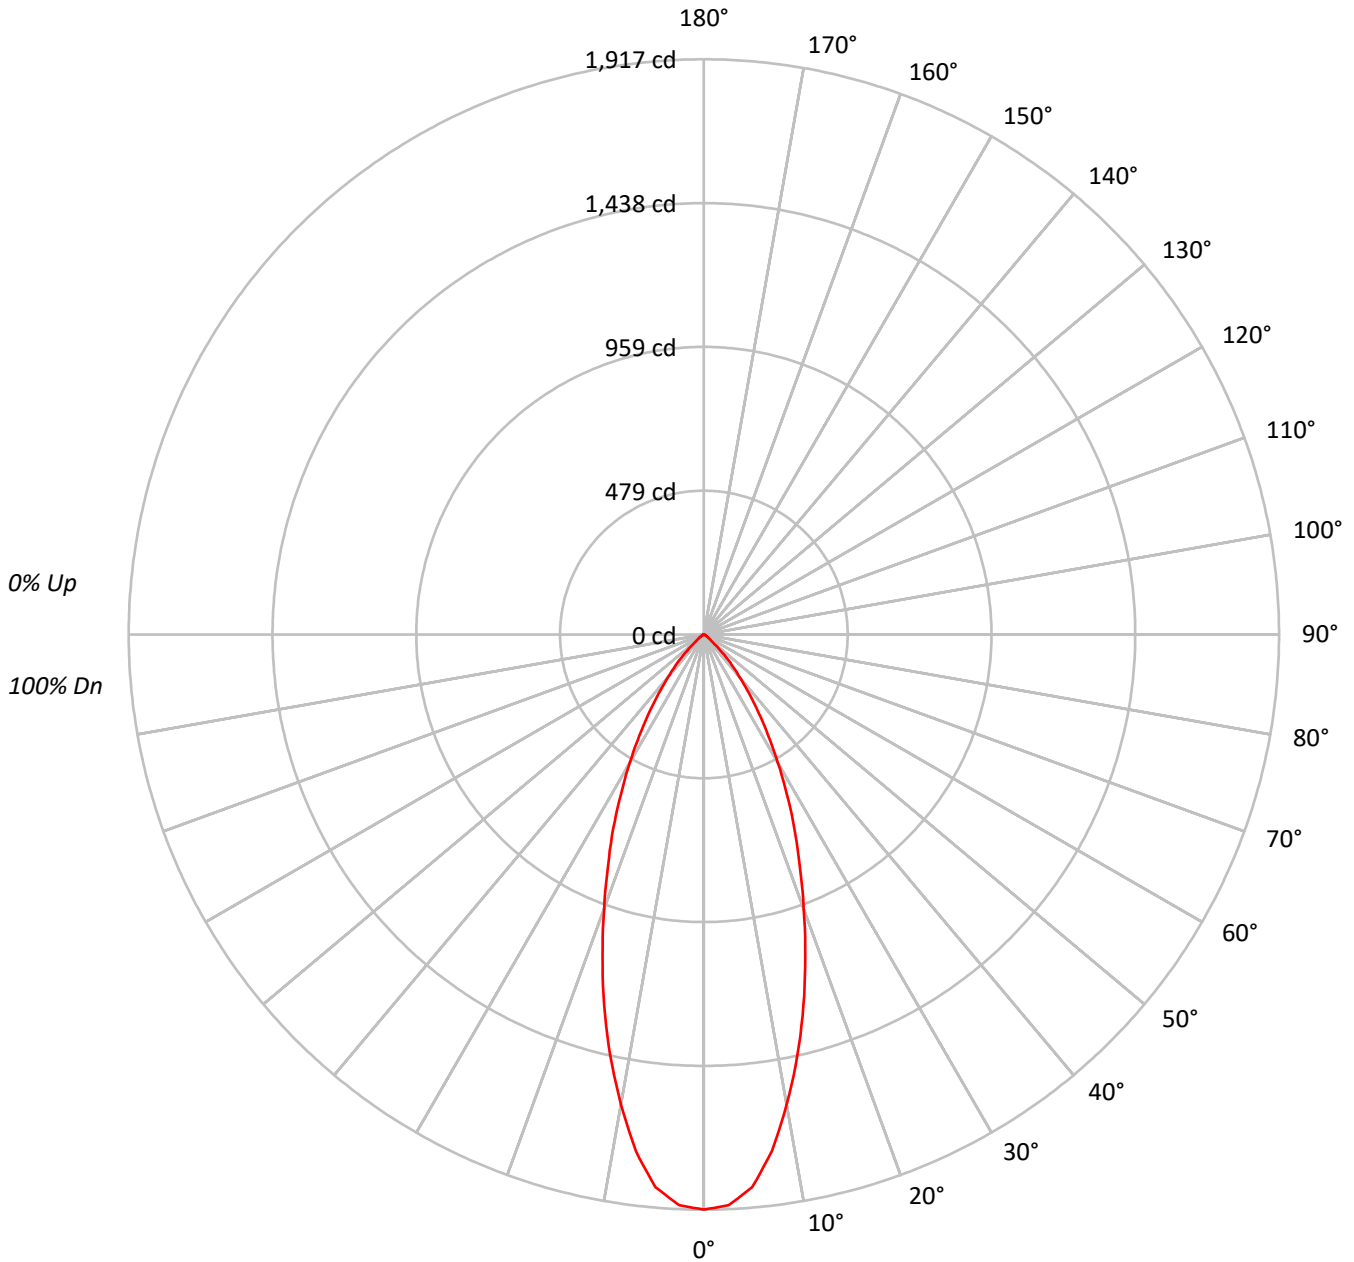



TEST NUMBER: P642457

CATALOG NUMBER: ML5615LSFL409FS1E - 593TBZB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88																			
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	89	86	84	82																			
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77																			
5	94	86	80	76	92	85	80	76	83	79	75	81	77	74	80	76	74	72																			
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68																			
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64																			
8	81	72	67	63	80	72	66	63	71	66	62	70	65	62	69	65	62	61																			
9	78	69	63	59	77	68	63	59	67	62	59	66	62	59	66	62	59	57																			
10	75	65	60	56	74	65	60	56	64	59	56	63	59	56	63	59	56	54																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	151306
5°	146503
10°	127492
15°	104764
20°	81672
25°	62191
30°	44920
35°	30636
40°	18982
45°	10684
50°	3918
55°	2271
60°	1295
65°	392
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10684 cd/sqm



TEST NUMBER: P642457

CATALOG NUMBER: ML5615LSFL409FS1E - 593TBZB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.9	14.7
10°-20°	354.3	31.0
20°-30°	326.6	28.6
30°-40°	201.0	17.6
40°-50°	74.6	6.5
50°-60°	15.6	1.4
60°-70°	2.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	848.8	74.3
0°-40°	1049.8	91.9
0°-60°	1140.0	99.8
0°-90°	1142.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1142.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1917	
5°	1849	168
15°	1282	354
25°	714	327
35°	318	201
45°	96	75
55°	16	16
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642457

CATALOG NUMBER: ML5615LSFL409FS1E - 593TBZB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1916.7
2.5°	1903.3
5°	1848.8
7.5°	1736.6
10°	1590.5
12.5°	1439.3
15°	1281.9
17.5°	1123.5
20°	972.2
22.5°	834.4
25°	714.0
27.5°	597.7
30°	492.8
32.5°	399.2
35°	317.9
37.5°	247.9
40°	184.2
42.5°	138.9
45°	95.7
47.5°	51.4
50°	31.9
52.5°	22.6
55°	16.5
57.5°	11.3
60°	8.2
62.5°	5.1
65°	2.1
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)