

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642475

Luminaire Tested: ML5615LSFL409FS1E - 593WB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 593WB - 900LM - 5000K
Description: ML56 RR, 40D TIR OPTIC, 5" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1291.9 lumens
Efficiency: N/A
Efficacy: 123.0 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642475
CATALOG NUMBER: ML5615LSFL409FS1E - 593WB - 900LM - 5000K

Luminous Intensity Polar Plot

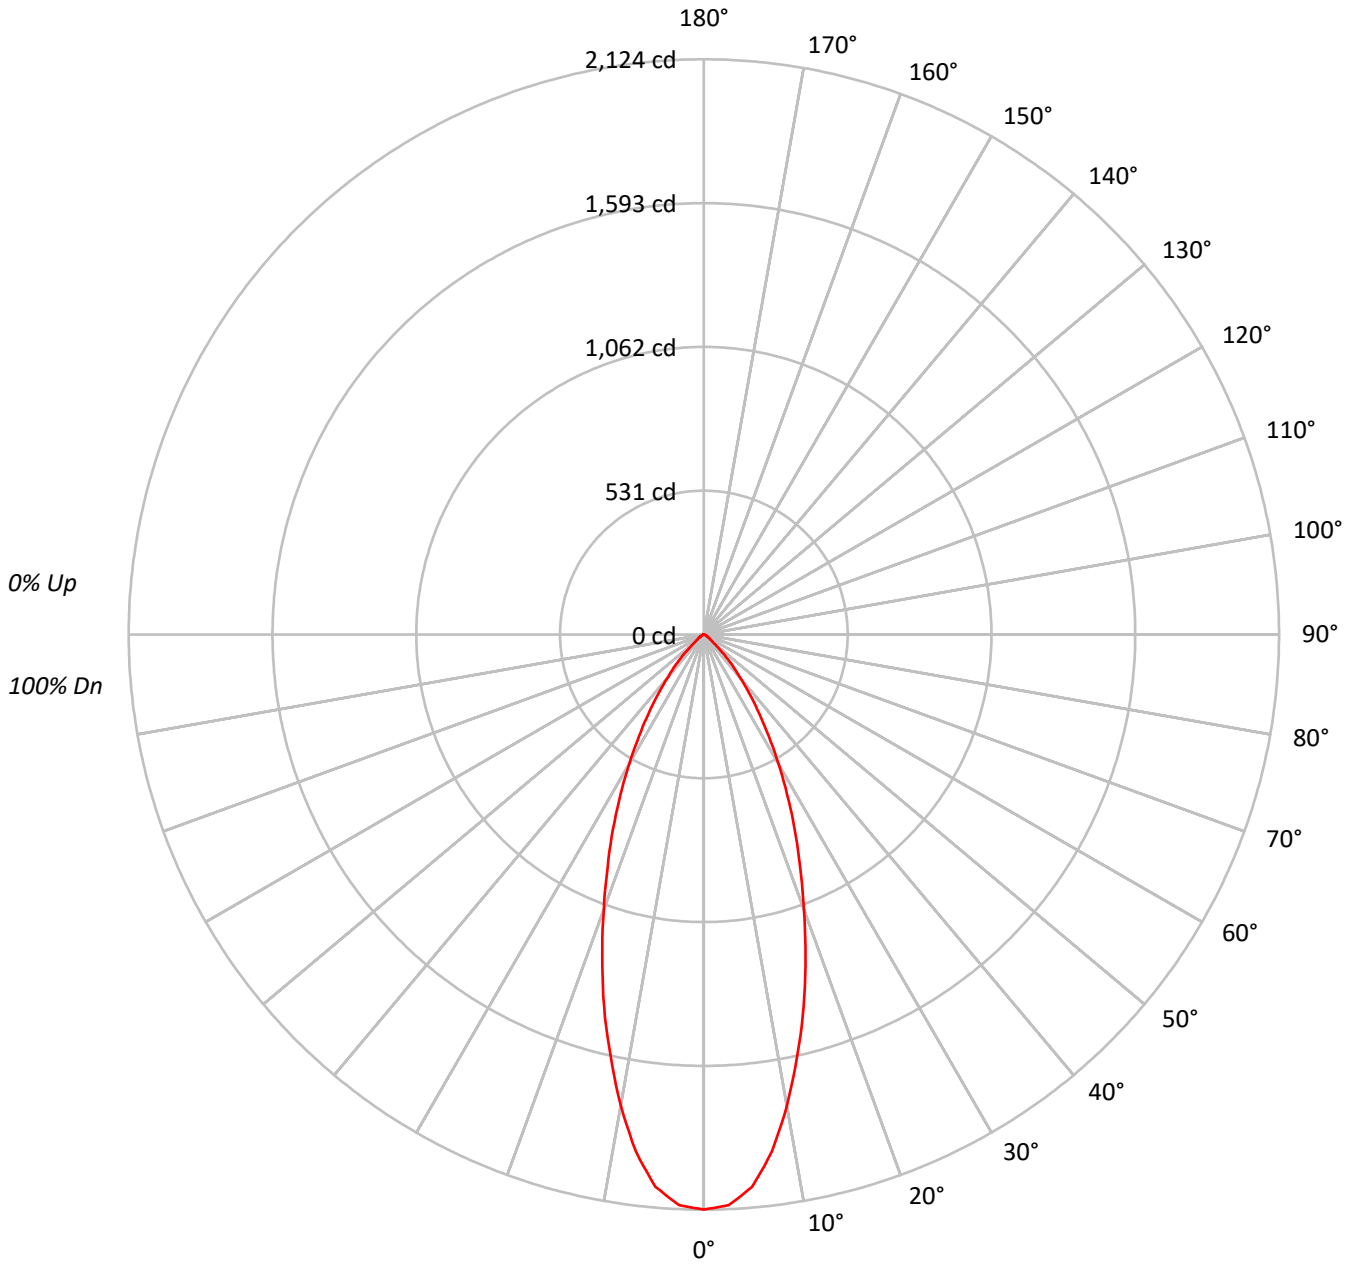



TEST NUMBER: P642475
 CATALOG NUMBER: ML5615LSFL409FS1E - 593WB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	82	79	83	80	78	76																			
5	93	85	79	75	92	84	79	75	82	78	74	81	77	73	79	76	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	85	76	70	66	83	75	69	66	74	69	65	73	68	65	71	67	64	63																			
8	81	72	66	62	80	71	66	62	70	65	61	69	64	61	68	64	61	60																			
9	77	68	62	58	76	67	62	58	66	62	58	66	61	58	65	61	58	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	167631
5°	162233
10°	141584
15°	116377
20°	90677
25°	69150
30°	50080
35°	34201
40°	21331
45°	12693
50°	5023
55°	3289
60°	2337
65°	1494
70°	1316
75°	1373
80°	1546
85°	2083

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12693 cd/sqm



TEST NUMBER: P642475

CATALOG NUMBER: ML5615LSFL409FS1E - 593WB - 900LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.2	14.4
10°-20°	393.2	30.4
20°-30°	363.3	28.1
30°-40°	224.6	17.4
40°-50°	87.1	6.7
50°-60°	22.4	1.7
60°-70°	8.7	0.7
70°-80°	4.5	0.3
80°-90°	2.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	942.7	73.0
0°-40°	1167.3	90.4
0°-60°	1276.7	98.8
0°-90°	1291.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1291.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2124	
5°	2047	186
15°	1424	393
25°	794	363
35°	355	225
45°	114	87
55°	24	22
65°	8	9
75°	4	4
85°	2	2
90°	0	



TEST NUMBER: P642475

CATALOG NUMBER: ML5615LSFL409FS1E - 593WB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2123.5
2.5°	2109.8
5°	2047.3
7.5°	1925.6
10°	1766.3
12.5°	1593.5
15°	1424.0
17.5°	1247.7
20°	1079.4
22.5°	928.1
25°	793.9
27.5°	665.4
30°	549.4
32.5°	444.7
35°	354.9
37.5°	278.7
40°	207.0
42.5°	158.1
45°	113.7
47.5°	63.7
50°	40.9
52.5°	30.7
55°	23.9
57.5°	18.2
60°	14.8
62.5°	11.4
65°	8.0
67.5°	5.7
70°	5.7
72.5°	4.5
75°	4.5
77.5°	3.4
80°	3.4
82.5°	2.3
85°	2.3
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)