

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642538

Luminaire Tested: ML5615LSFL409FS1E - 691WB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642538
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 691WB - 1200LM - 3500K
Description: ML56 RR, 40D TIR OPTIC, 6" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1530.0 lumens
Efficiency: N/A
Efficacy: 114.2 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642538

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1200LM - 3500K

Luminous Intensity Polar Plot

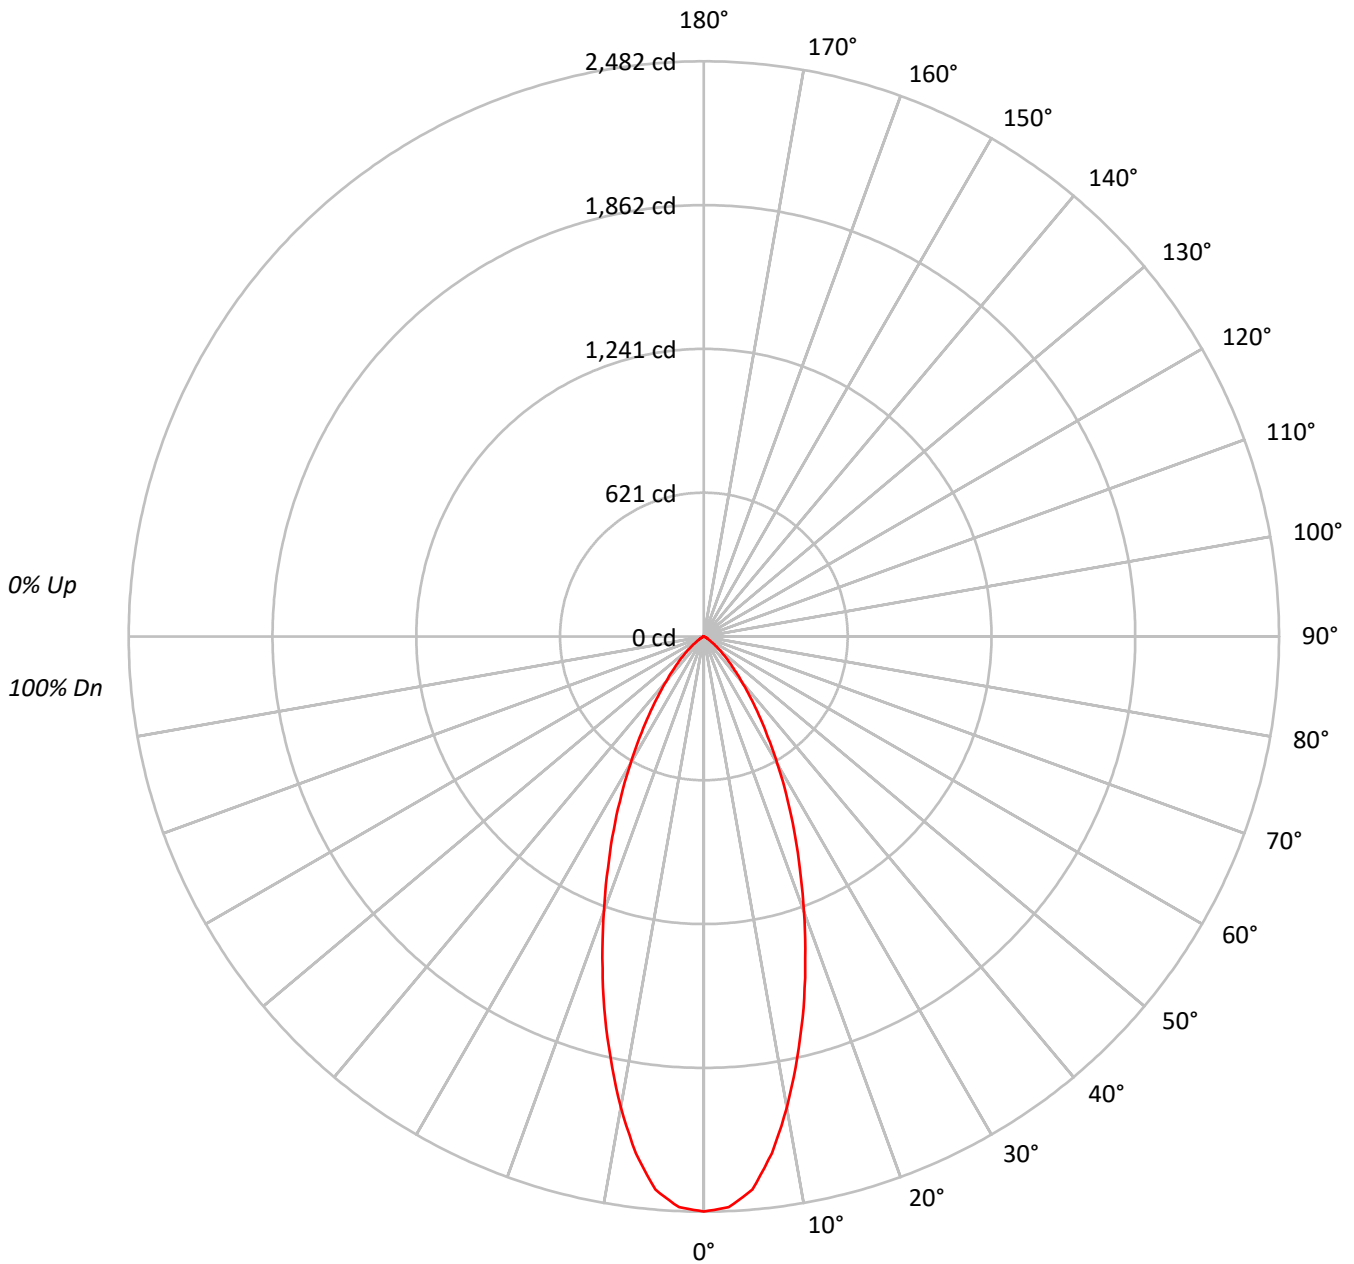



TEST NUMBER: P642538

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	87	101	95	90	87	92	89	85	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76																			
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71																			
6	88	80	74	70	87	79	73	69	77	72	69	76	72	68	75	71	68	67																			
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	63																			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	61	67	63	60	59																			
9	77	67	62	58	76	67	61	58	66	61	57	65	61	57	64	60	57	56																			
10	73	64	58	55	72	64	58	55	63	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	136036
5°	131851
10°	114866
15°	94217
20°	73553
25°	55660
30°	40158
35°	27619
40°	18062
45°	11807
50°	6951
55°	3699
60°	2050
65°	1206
70°	641
75°	275
80°	410
85°	818

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11807 cd/sqm



TEST NUMBER: P642538

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	217.6	14.2
10°-20°	458.9	30.0
20°-30°	421.7	27.6
30°-40°	261.7	17.1
40°-50°	119.7	7.8
50°-60°	37.7	2.5
60°-70°	9.7	0.6
70°-80°	2.1	0.1
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1098.2	71.8
0°-40°	1360.0	88.9
0°-60°	1517.4	99.2
0°-90°	1530.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1530.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2482	
5°	2396	218
15°	1660	459
25°	920	422
35°	413	262
45°	152	120
55°	39	38
65°	9	10
75°	1	2
85°	1	1
90°	0	



TEST NUMBER: P642538

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2481.5
2.5°	2465.5
5°	2396.0
7.5°	2249.1
10°	2063.5
12.5°	1861.8
15°	1660.1
17.5°	1455.8
20°	1260.8
22.5°	1080.5
25°	920.2
27.5°	769.3
30°	634.4
32.5°	514.2
35°	412.7
37.5°	325.9
40°	252.4
42.5°	196.3
45°	152.3
47.5°	112.2
50°	81.5
52.5°	56.1
55°	38.7
57.5°	25.4
60°	18.7
62.5°	13.4
65°	9.3
67.5°	5.3
70°	4.0
72.5°	2.7
75°	1.3
77.5°	1.3
80°	1.3
82.5°	1.3
85°	1.3
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)