

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642541

Luminaire Tested: ML5615LSFL409FS1E - 691WB - 1500LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642541  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSFL409FS1E - 691WB - 1500LM - 2700K  
Description: ML56 RR, 40D TIR OPTIC, 6" DEADFRONT TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1780.5 lumens  
Efficiency: N/A  
Efficacy: 104.1 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642541  
CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1500LM - 2700K

### Luminous Intensity Polar Plot

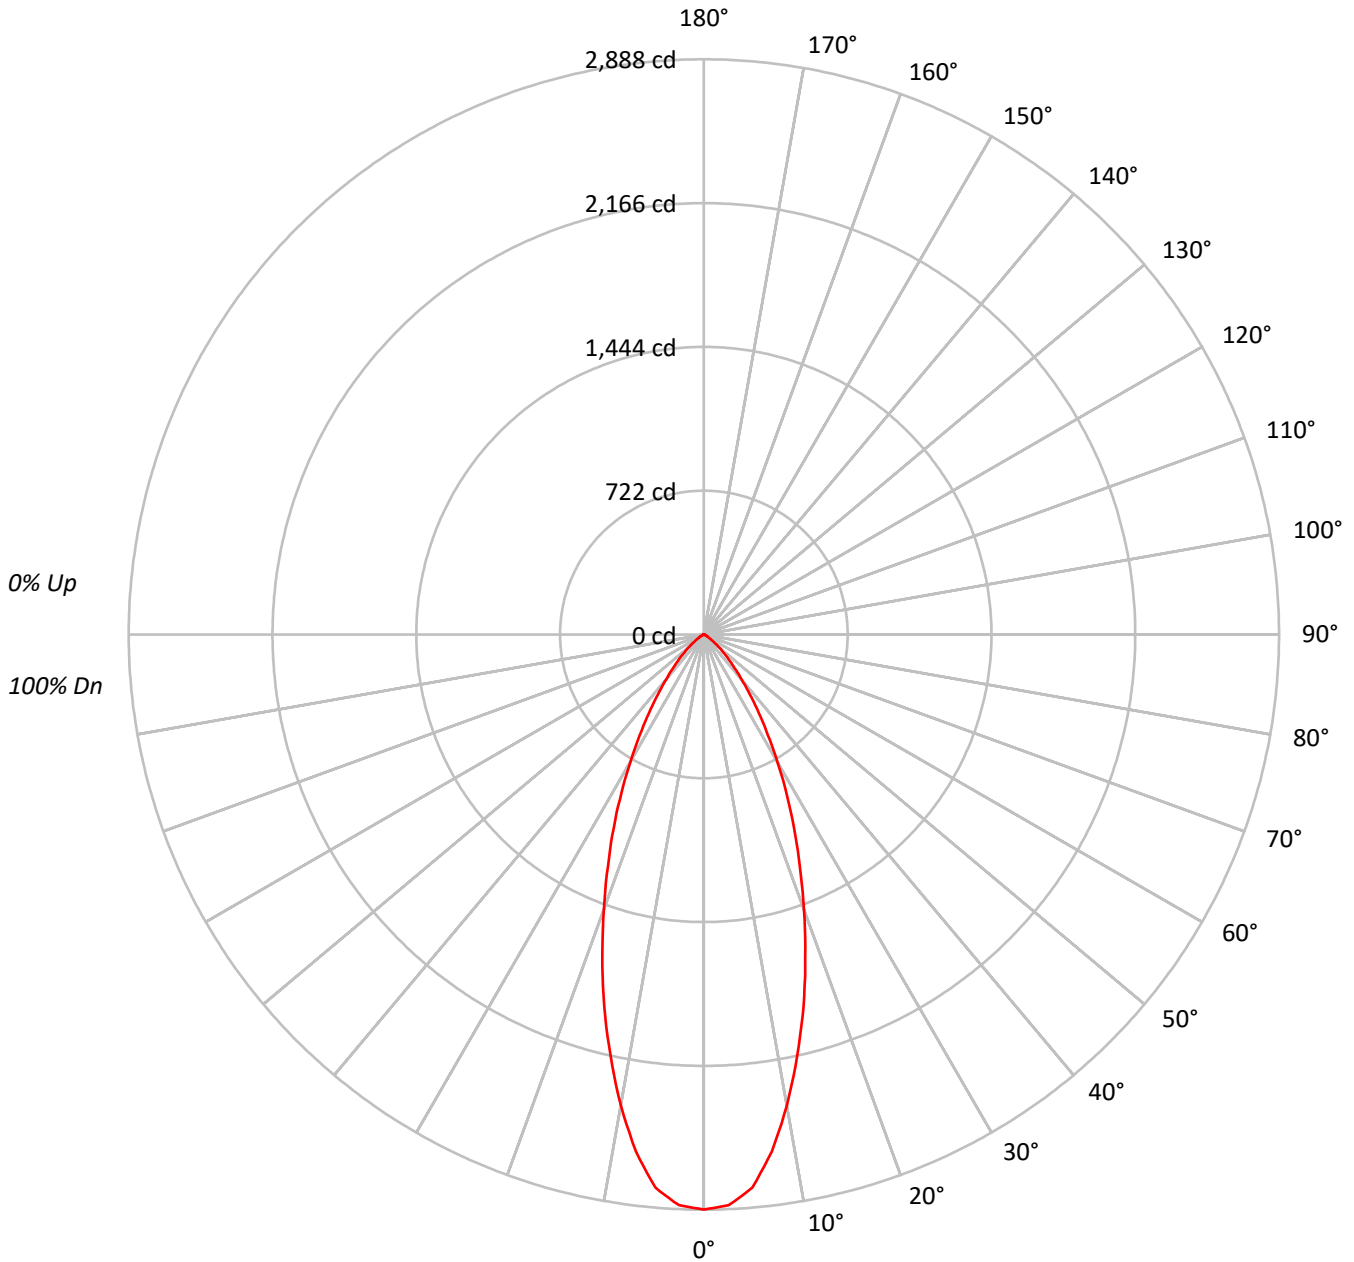



TEST NUMBER: P642541

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1500LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	87	101	95	90	87	92	89	85	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76																			
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71																			
6	88	80	74	70	87	79	73	69	77	72	69	76	72	68	75	71	68	67																			
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	63																			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	61	67	63	60	59																			
9	77	67	62	58	76	67	61	58	66	61	57	65	61	57	64	60	57	56																			
10	73	64	58	55	72	64	58	55	63	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	158293
5°	153422
10°	133659
15°	109632
20°	85588
25°	64770
30°	46729
35°	32136
40°	21018
45°	13738
50°	8085
55°	4310
60°	2390
65°	1414
70°	753
75°	339
80°	505
85°	1006

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13738 cd/sqm



TEST NUMBER: P642541

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1500LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	253.2	14.2
10°-20°	534.0	30.0
20°-30°	490.7	27.6
30°-40°	304.5	17.1
40°-50°	139.3	7.8
50°-60°	43.8	2.5
60°-70°	11.3	0.6
70°-80°	2.5	0.1
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1277.9	71.8
0°-40°	1582.5	88.9
0°-60°	1765.6	99.2
0°-90°	1780.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1780.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2888	
5°	2788	253
15°	1932	534
25°	1071	491
35°	480	305
45°	177	139
55°	45	44
65°	11	11
75°	2	2
85°	2	1
90°	0	



TEST NUMBER: P642541

CATALOG NUMBER: ML5615LSFL409FS1E - 691WB - 1500LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2887.5
2.5°	2868.8
5°	2788.0
7.5°	2617.1
10°	2401.1
12.5°	2166.4
15°	1931.7
17.5°	1694.0
20°	1467.1
22.5°	1257.3
25°	1070.8
27.5°	895.2
30°	738.2
32.5°	598.3
35°	480.2
37.5°	379.2
40°	293.7
42.5°	228.5
45°	177.2
47.5°	130.5
50°	94.8
52.5°	65.3
55°	45.1
57.5°	29.5
60°	21.8
62.5°	15.5
65°	10.9
67.5°	6.2
70°	4.7
72.5°	3.1
75°	1.6
77.5°	1.6
80°	1.6
82.5°	1.6
85°	1.6
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)