

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642618

Luminaire Tested: ML5615LSFL409FS1E - 693SNB - 1500LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642618
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-42)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 693SNB - 1500LM - 3500K
Description: ML56 RR, 40D TIR OPTIC, 6" SATIN NICKLE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1869.6 lumens
Efficiency: N/A
Efficacy: 109.3 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.7
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642618
CATALOG NUMBER: ML5615LSFL409FS1E - 693SNB - 1500LM - 3500K

Luminous Intensity Polar Plot

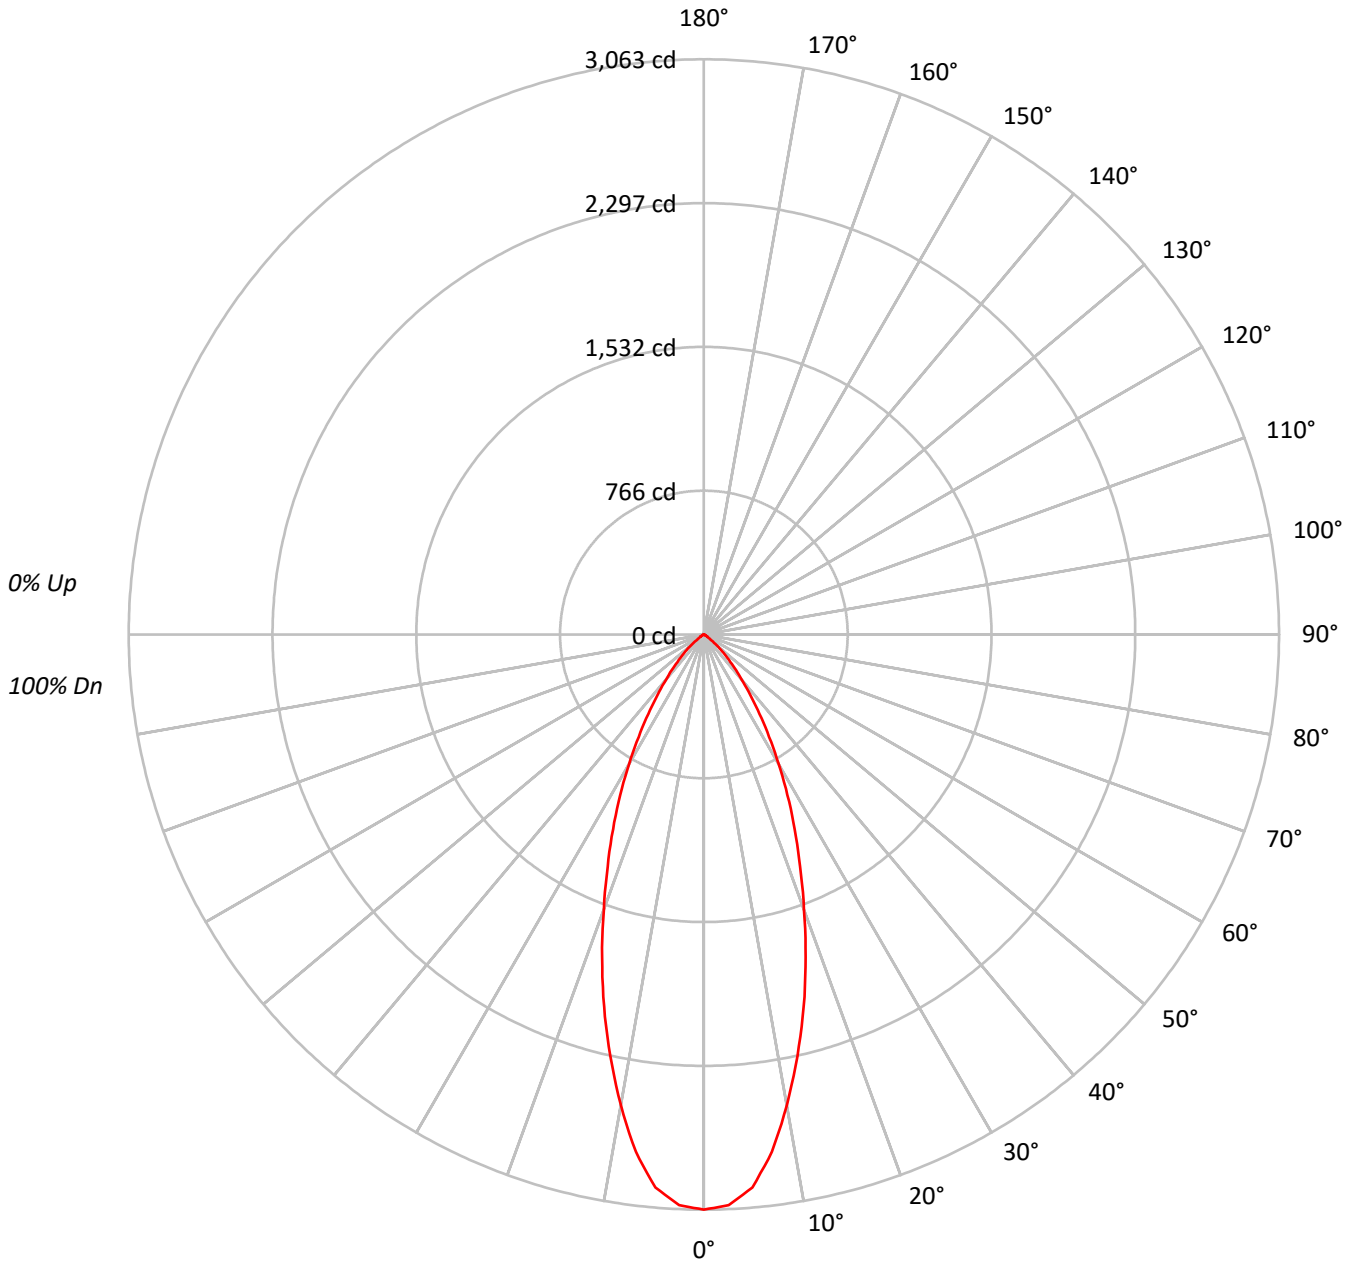



TEST NUMBER: P642618

CATALOG NUMBER: ML5615LSFL409FS1E - 693SNB - 1500LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94				94															
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88				88															
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82				82															
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	80	78	76				76															
5	93	85	80	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72				72															
6	89	80	74	70	87	79	74	70	78	73	70	77	72	69	75	72	69	67				67															
7	85	76	70	66	83	75	70	66	74	69	65	73	68	65	72	68	65	63				63															
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60				60															
9	77	68	62	58	76	67	62	58	67	62	58	66	61	58	65	61	58	56				56															
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53				53															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	167909
5°	162667
10°	141670
15°	116539
20°	90926
25°	69216
30°	50369
35°	34546
40°	22356
45°	13769
50°	7428
55°	2829
60°	1798
65°	636
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13769 cd/sqm



TEST NUMBER: P642618

CATALOG NUMBER: ML5615LSFL409FS1E - 693SNB - 1500LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	268.6	14.4
10°-20°	567.3	30.3
20°-30°	524.7	28.1
30°-40°	327.1	17.5
40°-50°	143.0	7.6
50°-60°	32.8	1.8
60°-70°	6.0	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1360.6	72.8
0°-40°	1687.8	90.3
0°-60°	1863.6	99.7
0°-90°	1869.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1869.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3063	
5°	2956	269
15°	2053	567
25°	1144	525
35°	516	327
45°	178	143
55°	30	33
65°	5	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642618

CATALOG NUMBER: ML5615LSFL409FS1E - 693SNB - 1500LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3062.9
2.5°	3041.5
5°	2956.0
7.5°	2778.5
10°	2545.0
12.5°	2300.1
15°	2053.4
17.5°	1801.9
20°	1558.6
22.5°	1338.3
25°	1144.3
27.5°	963.4
30°	795.7
32.5°	646.1
35°	516.2
37.5°	404.4
40°	312.4
42.5°	241.7
45°	177.6
47.5°	131.5
50°	87.1
52.5°	44.4
55°	29.6
57.5°	23.0
60°	16.4
62.5°	9.9
65°	4.9
67.5°	1.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)