

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642635

Luminaire Tested: ML5615LSFL409FS1E - 693TBZB - 1500LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-43)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 693TBZB - 1500LM - 5000K
Description: ML56 RR, 40D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1998.2 lumens
Efficiency: N/A
Efficacy: 116.9 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642635
CATALOG NUMBER: ML5615LSFL409FS1E - 693TBZB - 1500LM - 5000K

Luminous Intensity Polar Plot

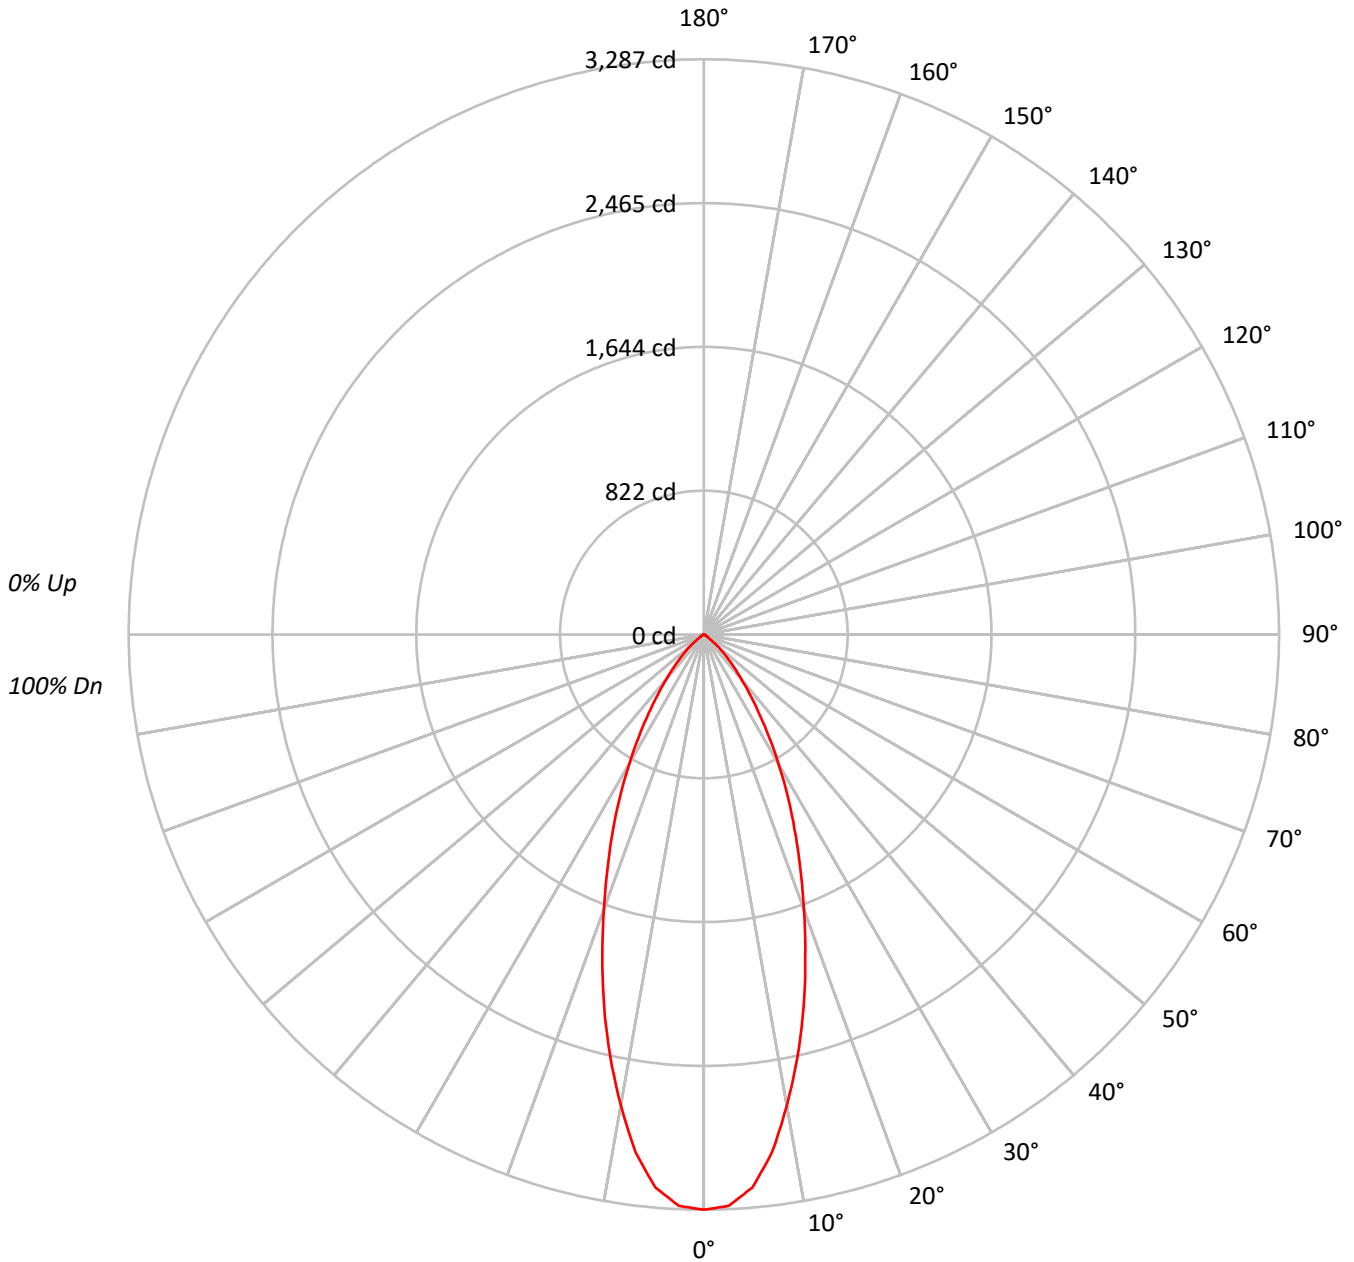



TEST NUMBER: P642635

CATALOG NUMBER: ML5615LSFL409FS1E - 693TBZB - 1500LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	98	98	97	96	94			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82			
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77			
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72			
6	89	80	75	70	87	80	74	70	78	73	70	77	72	69	75	72	69	67			
7	85	76	70	66	83	75	70	66	74	69	65	73	68	65	72	68	65	63			
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60			
9	77	68	62	59	76	68	62	58	67	62	58	66	61	58	65	61	58	57			
10	74	65	59	55	73	64	59	55	63	59	55	63	58	55	62	58	55	54			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	180205
5°	174565
10°	152062
15°	125012
20°	97431
25°	74055
30°	53869
35°	36707
40°	23673
45°	14676
50°	7394
55°	3039
60°	1743
65°	687
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14676 cd/sqm



TEST NUMBER: P642635

CATALOG NUMBER: ML5615LSFL409FS1E - 693TBZB - 1500LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	288.4	14.4
10°-20°	608.4	30.4
20°-30°	561.9	28.1
30°-40°	348.7	17.5
40°-50°	150.9	7.6
50°-60°	33.6	1.7
60°-70°	6.3	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1458.7	73.0
0°-40°	1807.5	90.5
0°-60°	1991.9	99.7
0°-90°	1998.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1998.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3287	
5°	3172	288
15°	2203	608
25°	1224	562
35°	548	349
45°	189	151
55°	32	34
65°	5	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642635

CATALOG NUMBER: ML5615LSFL409FS1E - 693TBZB - 1500LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3287.2
2.5°	3267.7
5°	3172.2
7.5°	2984.7
10°	2731.7
12.5°	2471.6
15°	2202.7
17.5°	1928.4
20°	1670.1
22.5°	1434.8
25°	1224.3
27.5°	1031.5
30°	851.0
32.5°	690.0
35°	548.5
37.5°	431.7
40°	330.8
42.5°	256.5
45°	189.3
47.5°	138.0
50°	86.7
52.5°	46.0
55°	31.8
57.5°	23.0
60°	15.9
62.5°	10.6
65°	5.3
67.5°	1.8
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)