

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642647

Luminaire Tested: ML5615LSFL409FS1E - 693WB - 1500LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642647
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-40)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 693WB - 1500LM - 3000K
Description: ML56 RR, 40D TIR OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1829.7 lumens
Efficiency: N/A
Efficacy: 107.0 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642647
CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 1500LM - 3000K

Luminous Intensity Polar Plot

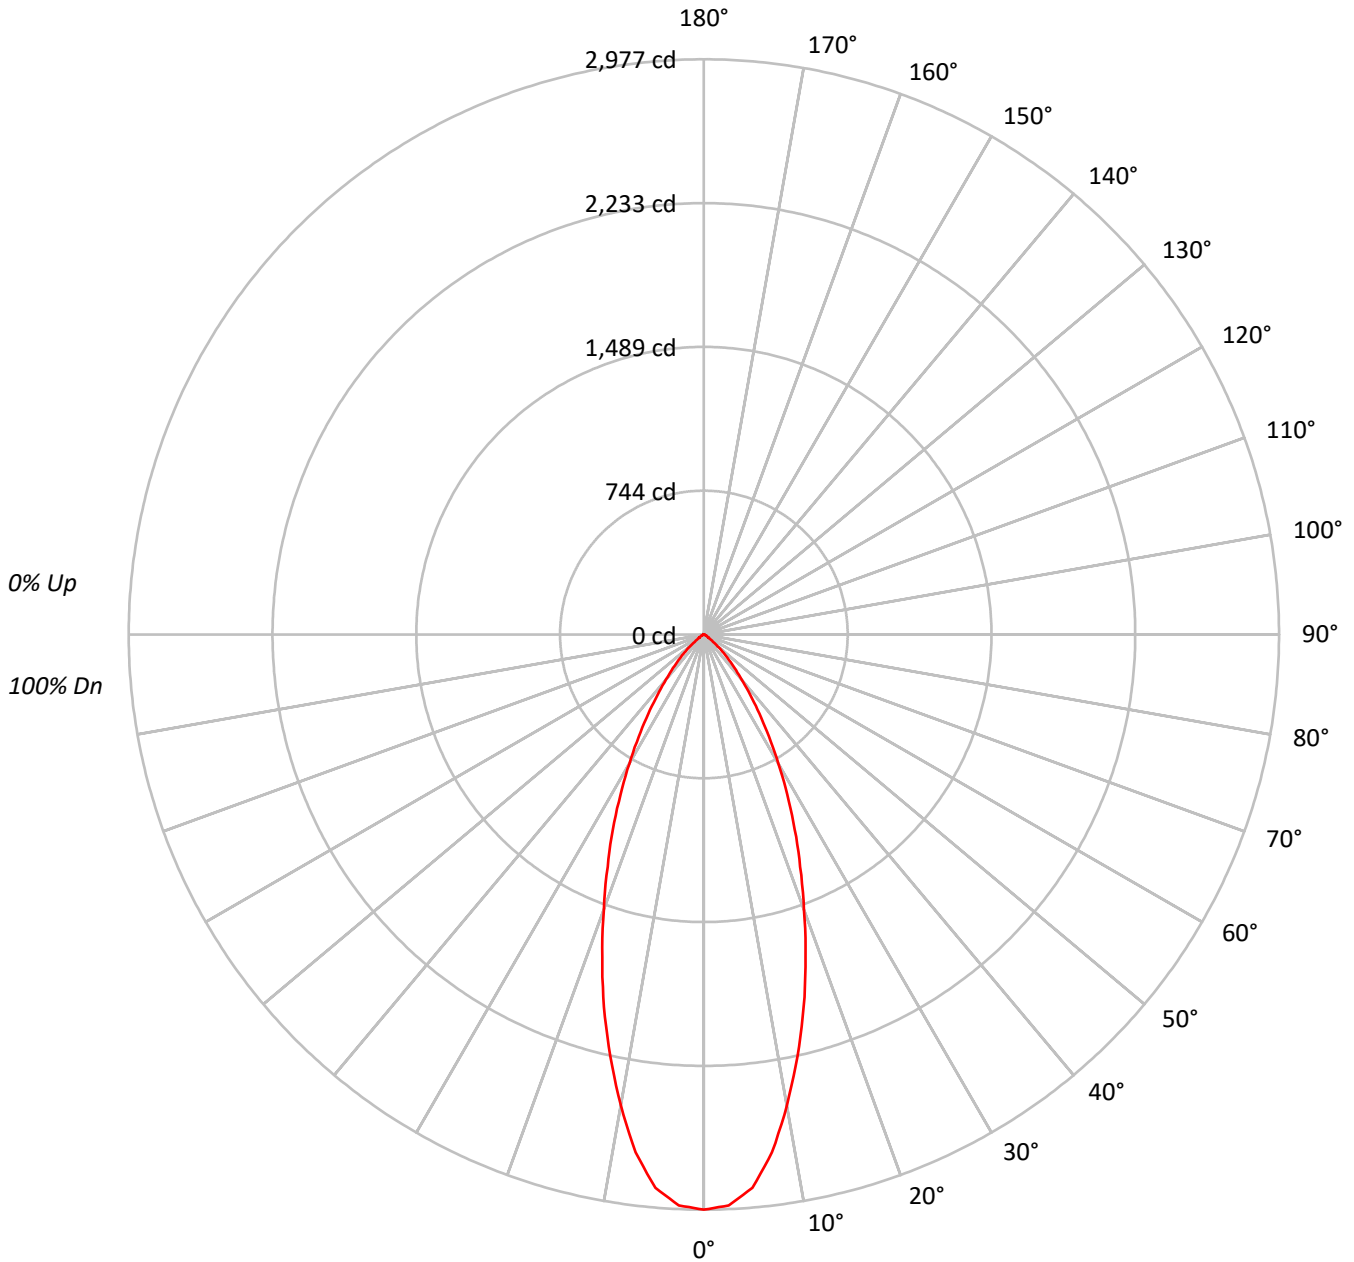



TEST NUMBER: P642647

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 1500LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	78	76																			
5	93	85	79	75	91	84	79	75	82	77	74	80	76	73	79	75	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63																			
8	81	71	66	62	79	71	65	61	70	65	61	69	64	61	68	64	61	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	64	59	55	73	64	58	55	63	58	55	62	58	55	62	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	163189
5°	158183
10°	137751
15°	113298
20°	88371
25°	67341
30°	48805
35°	33508
40°	21748
45°	13521
50°	7232
55°	3058
60°	2105
65°	1245
70°	769
75°	678
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13521 cd/sqm



TEST NUMBER: P642647

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 1500LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	261.2	14.3
10°-20°	551.4	30.1
20°-30°	509.8	27.9
30°-40°	317.6	17.4
40°-50°	139.7	7.6
50°-60°	34.2	1.9
60°-70°	10.0	0.5
70°-80°	4.0	0.2
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1322.4	72.3
0°-40°	1640.0	89.6
0°-60°	1813.9	99.1
0°-90°	1829.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1829.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2977	
5°	2874	261
15°	1996	551
25°	1113	510
35°	501	318
45°	174	140
55°	32	34
65°	10	10
75°	3	4
85°	2	2
90°	0	



TEST NUMBER: P642647

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 1500LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2976.8
2.5°	2957.6
5°	2874.5
7.5°	2703.3
10°	2474.6
12.5°	2236.2
15°	1996.3
17.5°	1749.9
20°	1514.8
22.5°	1302.1
25°	1113.3
27.5°	934.2
30°	771.0
32.5°	627.0
35°	500.7
37.5°	393.5
40°	303.9
42.5°	235.1
45°	174.4
47.5°	129.6
50°	84.8
52.5°	44.8
55°	32.0
57.5°	25.6
60°	19.2
62.5°	14.4
65°	9.6
67.5°	4.8
70°	4.8
72.5°	4.8
75°	3.2
77.5°	3.2
80°	3.2
82.5°	1.6
85°	1.6
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)