

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642652

Luminaire Tested: ML5615LSFL409FS1E - 693WB - 900LM - 3000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642652  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-40)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSFL409FS1E - 693WB - 900LM - 3000K  
Description: ML56 RR, 40D TIR OPTIC, 6" WHITE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1176.7 lumens  
Efficiency: N/A  
Efficacy: 112.1 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642652  
CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 3000K

### Luminous Intensity Polar Plot

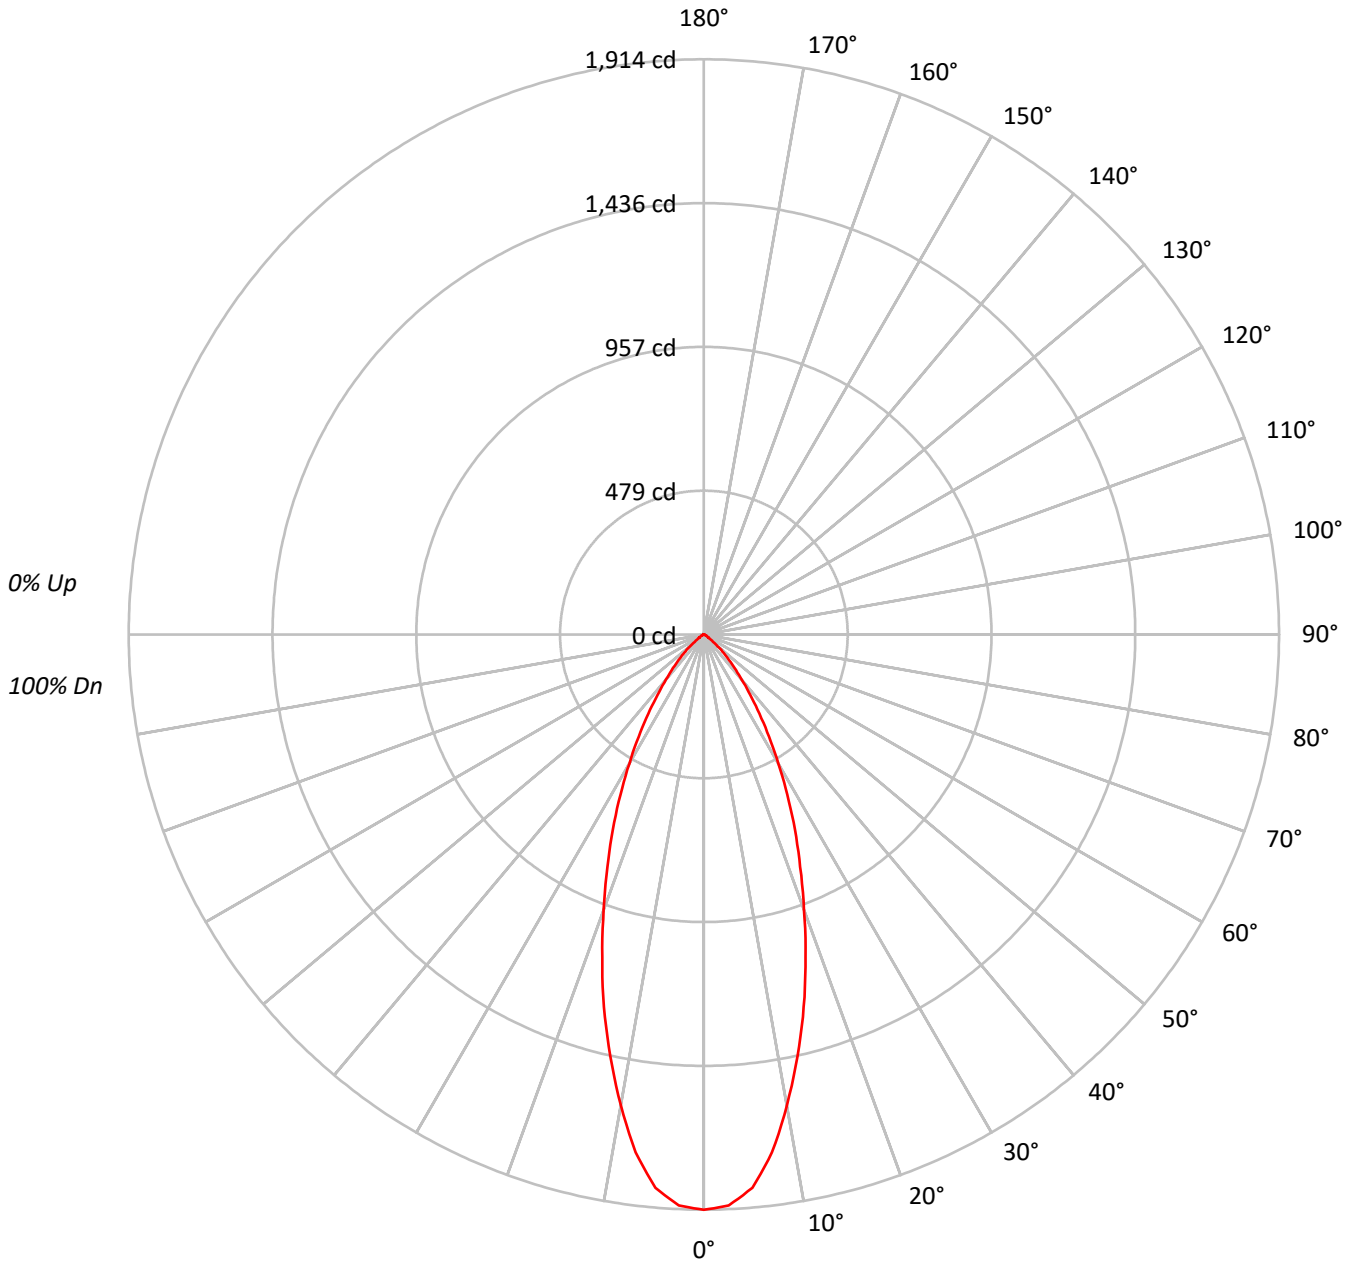



TEST NUMBER: P642652  
 CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	78	76																			
5	93	85	79	75	91	84	79	75	82	77	74	80	76	73	79	75	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63																			
8	81	71	66	62	79	71	65	61	70	65	61	69	64	61	68	64	61	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	64	59	55	73	64	58	55	63	58	55	62	58	55	62	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	104953
5°	101728
10°	88587
15°	72866
20°	56833
25°	43309
30°	31385
35°	21549
40°	13990
45°	8691
50°	4648
55°	1969
60°	1349
65°	804
70°	497
75°	445
80°	663
85°	629

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8691 cd/sqm



TEST NUMBER: P642652

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	168.0	14.3
10°-20°	354.6	30.1
20°-30°	327.9	27.9
30°-40°	204.3	17.4
40°-50°	89.8	7.6
50°-60°	22.0	1.9
60°-70°	6.5	0.5
70°-80°	2.6	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	850.5	72.3
0°-40°	1054.7	89.6
0°-60°	1166.6	99.1
0°-90°	1176.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1176.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1914	
5°	1849	168
15°	1284	355
25°	716	328
35°	322	204
45°	112	90
55°	21	22
65°	6	6
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P642652

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1914.5
2.5°	1902.1
5°	1848.6
7.5°	1738.6
10°	1591.4
12.5°	1438.2
15°	1283.9
17.5°	1125.4
20°	974.2
22.5°	837.4
25°	716.0
27.5°	600.8
30°	495.8
32.5°	403.3
35°	322.0
37.5°	253.1
40°	195.5
42.5°	151.2
45°	112.1
47.5°	83.3
50°	54.5
52.5°	28.8
55°	20.6
57.5°	16.5
60°	12.3
62.5°	9.3
65°	6.2
67.5°	3.1
70°	3.1
72.5°	3.1
75°	2.1
77.5°	2.1
80°	2.1
82.5°	1.0
85°	1.0
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)