

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642655

Luminaire Tested: ML5615LSFL409FS1E - 693WB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642655
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-40)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 693WB - 900LM - 5000K
Description: ML56 RR, 40D TIR OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1301.0 lumens
Efficiency: N/A
Efficacy: 123.9 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642655
CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 5000K

Luminous Intensity Polar Plot

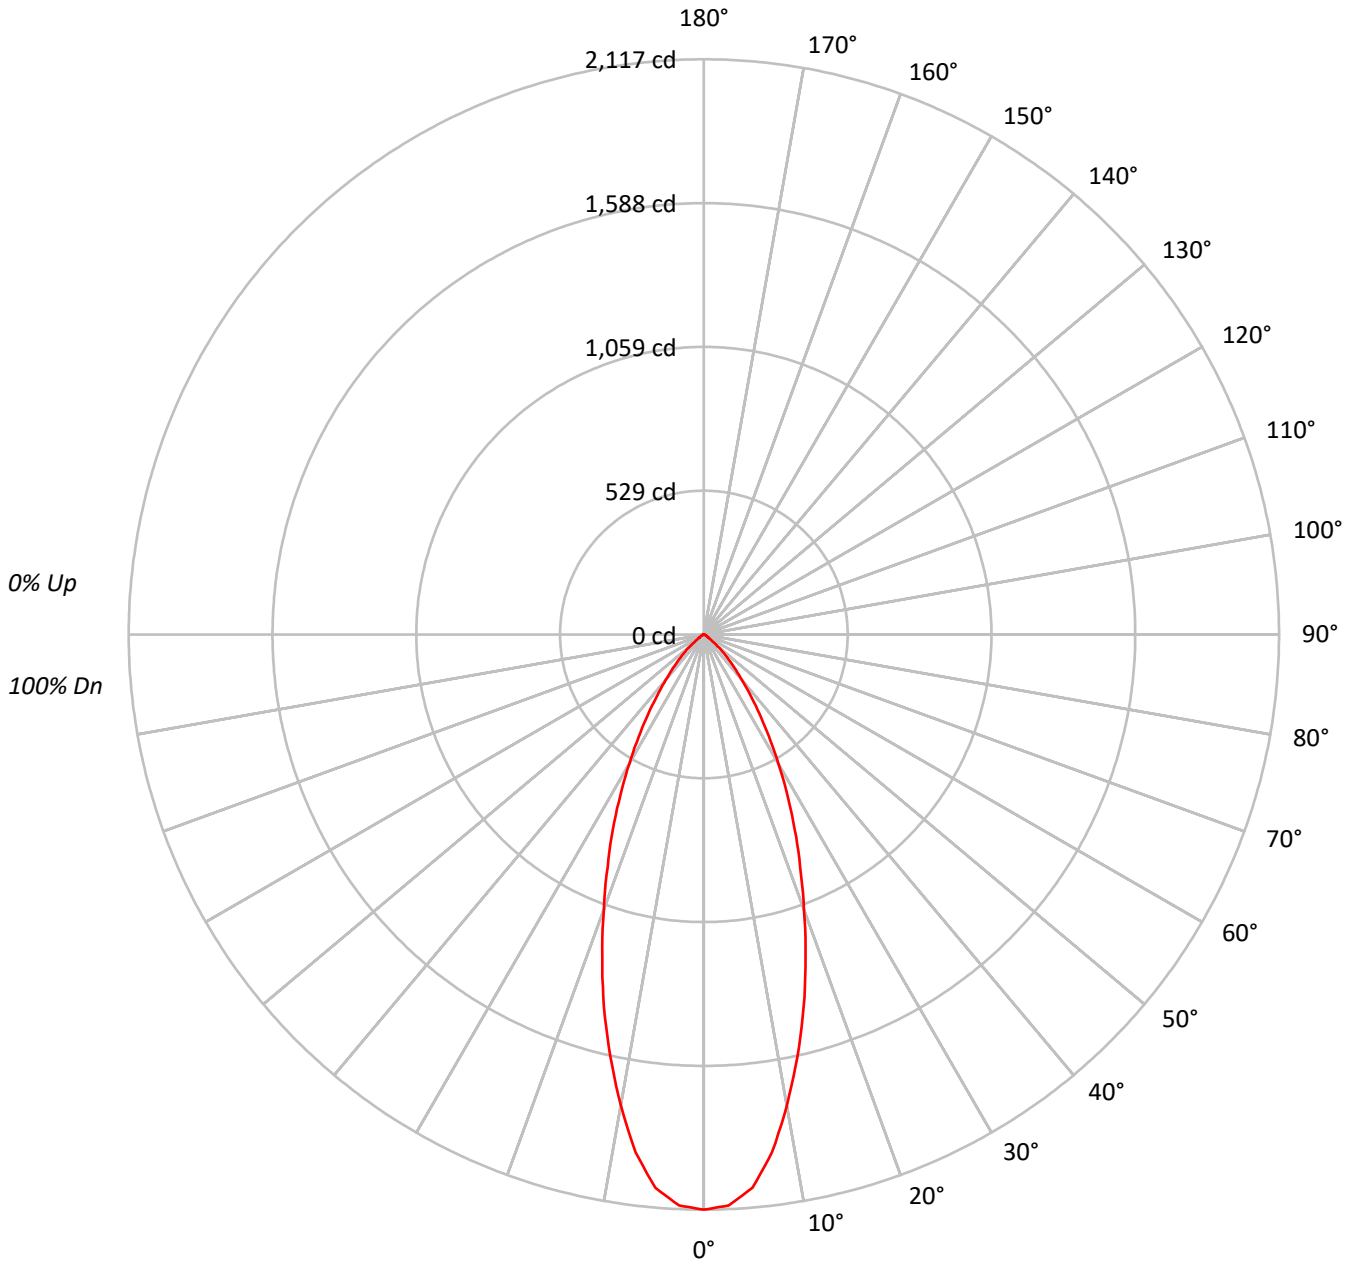



TEST NUMBER: P642655

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	78	76																			
5	93	85	79	75	91	84	79	75	82	77	74	80	76	73	79	75	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63																			
8	81	71	66	62	79	71	65	61	70	65	61	69	64	61	68	64	61	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	64	59	55	73	64	58	55	63	58	55	62	58	55	62	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	116043
5°	112480
10°	97950
15°	80562
20°	62836
25°	47888
30°	34702
35°	23825
40°	15465
45°	9613
50°	5143
55°	2170
60°	1491
65°	882
70°	545
75°	487
80°	726
85°	692

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9613 cd/sqm



TEST NUMBER: P642655

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.8	14.3
10°-20°	392.1	30.1
20°-30°	362.5	27.9
30°-40°	225.8	17.4
40°-50°	99.3	7.6
50°-60°	24.3	1.9
60°-70°	7.1	0.5
70°-80°	2.9	0.2
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	940.4	72.3
0°-40°	1166.2	89.6
0°-60°	1289.8	99.1
0°-90°	1301.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1301.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2117	
5°	2044	186
15°	1420	392
25°	792	363
35°	356	226
45°	124	99
55°	23	24
65°	7	7
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P642655

CATALOG NUMBER: ML5615LSFL409FS1E - 693WB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2116.8
2.5°	2103.1
5°	2044.0
7.5°	1922.3
10°	1759.6
12.5°	1590.1
15°	1419.5
17.5°	1244.3
20°	1077.1
22.5°	925.9
25°	791.7
27.5°	664.3
30°	548.2
32.5°	445.9
35°	356.0
37.5°	279.8
40°	216.1
42.5°	167.2
45°	124.0
47.5°	92.1
50°	60.3
52.5°	31.8
55°	22.7
57.5°	18.2
60°	13.6
62.5°	10.2
65°	6.8
67.5°	3.4
70°	3.4
72.5°	3.4
75°	2.3
77.5°	2.3
80°	2.3
82.5°	1.1
85°	1.1
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)