

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642696

Luminaire Tested: ML5615LSFL409FS1E - 696WB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642696
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-46)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 696WB - 900LM - 2700K
Description: ML56 RR, 40D TIR OPTIC, 6" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1154.0 lumens
Efficiency: N/A
Efficacy: 109.9 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642696
CATALOG NUMBER: ML5615LSFL409FS1E - 696WB - 900LM - 2700K

Luminous Intensity Polar Plot

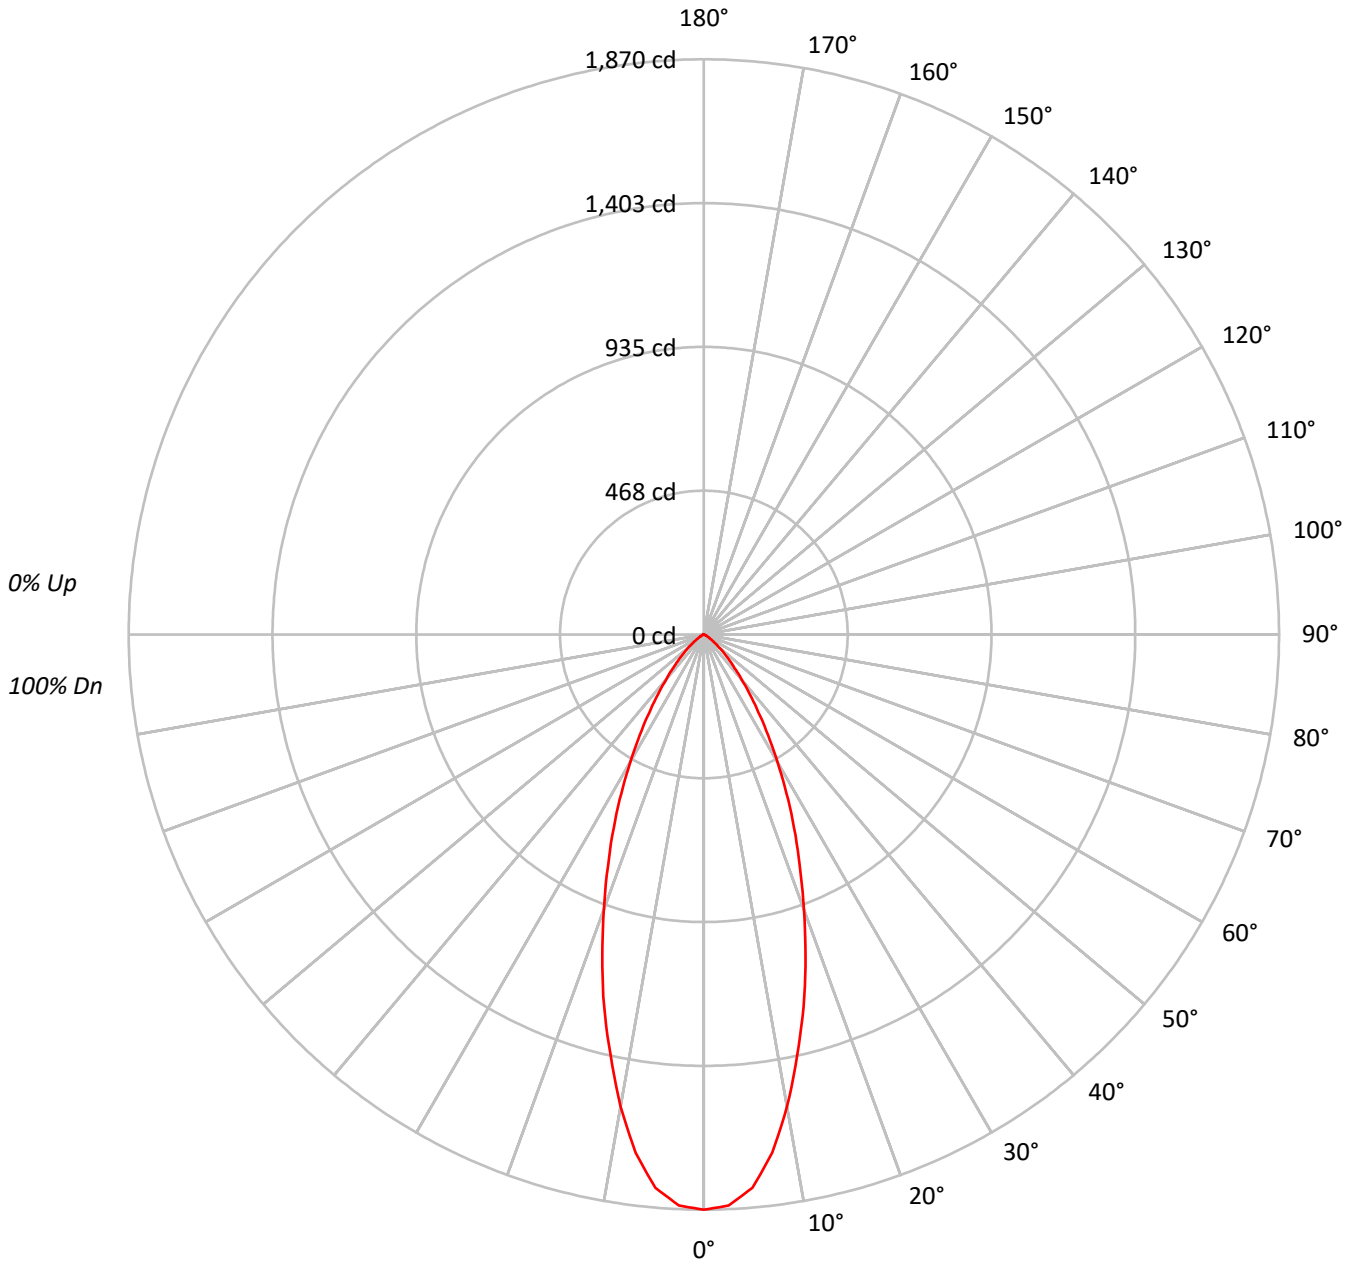



TEST NUMBER: P642696

CATALOG NUMBER: ML5615LSFL409FS1E - 696WB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	87	101	95	90	87	92	89	85	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76																			
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71																			
6	88	80	74	70	87	79	73	69	77	72	69	76	72	68	75	71	68	66																			
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	63																			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	61	67	63	60	59																			
9	77	67	62	58	76	67	61	58	66	61	57	65	60	57	64	60	57	56																			
10	73	64	58	55	72	64	58	55	63	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	102519
5°	99389
10°	86739
15°	71135
20°	55451
25°	41960
30°	30245
35°	20733
40°	13590
45°	8830
50°	5202
55°	2867
60°	1645
65°	908
70°	481
75°	212
80°	316
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8830 cd/sqm



TEST NUMBER: P642696

CATALOG NUMBER: ML5615LSFL409FS1E - 696WB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.2	14.2
10°-20°	346.0	30.0
20°-30°	318.0	27.6
30°-40°	196.9	17.1
40°-50°	90.1	7.8
50°-60°	29.2	2.5
60°-70°	7.6	0.7
70°-80°	1.6	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	828.2	71.8
0°-40°	1025.1	88.8
0°-60°	1144.4	99.2
0°-90°	1154.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1154.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1870	
5°	1806	164
15°	1253	346
25°	694	318
35°	310	197
45°	114	90
55°	30	29
65°	7	8
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P642696

CATALOG NUMBER: ML5615LSFL409FS1E - 696WB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1870.1
2.5°	1858.1
5°	1806.1
7.5°	1699.2
10°	1558.2
12.5°	1400.3
15°	1253.4
17.5°	1097.5
20°	950.5
22.5°	814.6
25°	693.7
27.5°	580.7
30°	477.8
32.5°	387.8
35°	309.8
37.5°	244.9
40°	189.9
42.5°	147.9
45°	113.9
47.5°	85.0
50°	61.0
52.5°	43.0
55°	30.0
57.5°	21.0
60°	15.0
62.5°	11.0
65°	7.0
67.5°	4.0
70°	3.0
72.5°	2.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)