

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642713

Luminaire Tested: ML5615LSNFL259FS1E - 591WB - 900LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642713
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 591WB - 900LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 5" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1122.1 lumens
Efficiency: N/A
Efficacy: 106.9 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642713

CATALOG NUMBER: ML5615LSNFL259FS1E - 591WB - 900LM - 3500K

Luminous Intensity Polar Plot

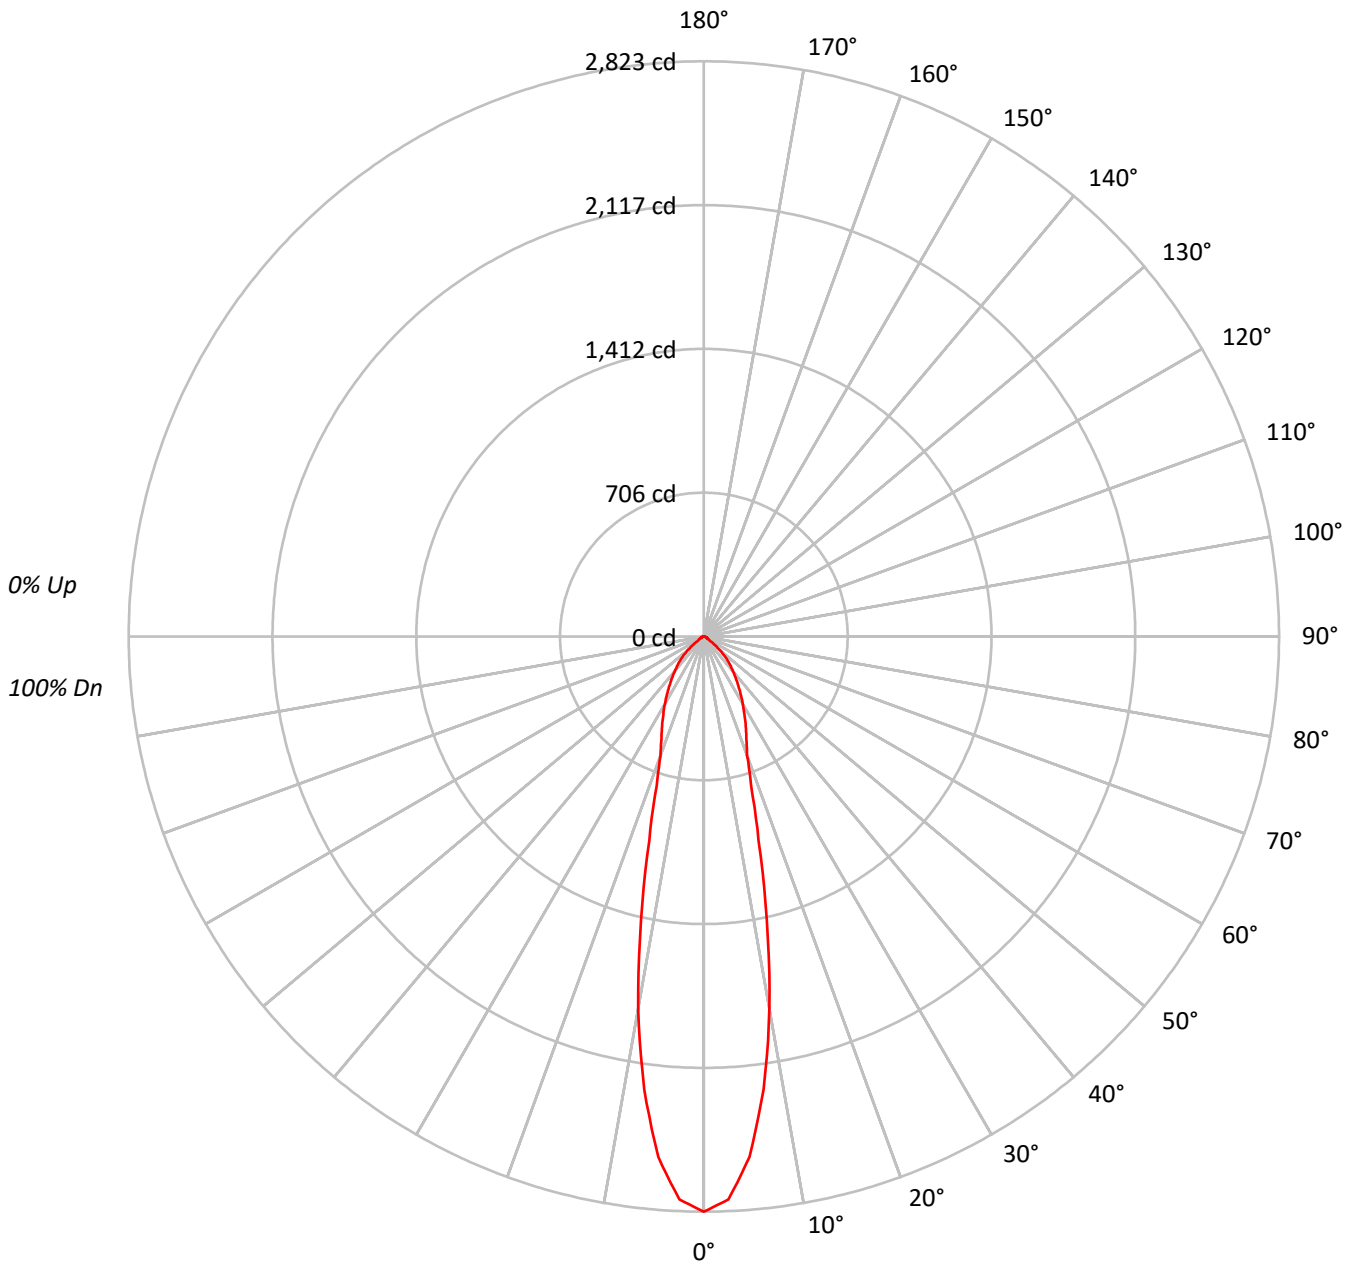



TEST NUMBER: P642713

CATALOG NUMBER: ML5615LSNFL259FS1E - 591WB - 900LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92	90	88	86
3	102	95	90	86	100	94	89	86	91	87	84		89	86	83		87	84	82	80
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82	79	76	75
5	92	84	78	74	90	83	77	73	81	76	73		79	75	72		78	74	71	70
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74	70	67	66
7	84	75	69	64	82	74	68	64	73	68	64		71	67	64		70	66	63	62
8	80	71	65	61	79	70	64	61	69	64	60		68	63	60		67	63	60	58
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64	60	57	56
10	73	64	58	55	72	64	58	55	63	58	54		62	58	54		61	57	54	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	222866
5°	203194
10°	148694
15°	84651
20°	52118
25°	42349
30°	34875
35°	28313
40°	22877
45°	18287
50°	11937
55°	5244
60°	3331
65°	2970
70°	2677
75°	2593
80°	2864
85°	2898

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18287 cd/sqm



TEST NUMBER: P642713

CATALOG NUMBER: ML5615LSNFL259FS1E - 591WB - 900LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.6	19.8
10°-20°	298.2	26.6
20°-30°	223.9	20.0
30°-40°	184.6	16.5
40°-50°	123.1	11.0
50°-60°	41.8	3.7
60°-70°	16.1	1.4
70°-80°	9.1	0.8
80°-90°	3.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	743.7	66.3
0°-40°	928.3	82.7
0°-60°	1093.2	97.4
0°-90°	1122.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1122.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2823	
5°	2564	222
15°	1036	298
25°	486	224
35°	294	185
45°	164	123
55°	38	42
65°	16	16
75°	8	9
85°	3	4
90°	0	



TEST NUMBER: P642713

CATALOG NUMBER: ML5615LSNFL259FS1E - 591WB - 900LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2823.2
2.5°	2765.0
5°	2564.2
7.5°	2241.8
10°	1855.0
12.5°	1423.7
15°	1035.8
17.5°	768.4
20°	620.4
22.5°	543.3
25°	486.2
27.5°	431.2
30°	382.6
32.5°	336.1
35°	293.8
37.5°	255.8
40°	222.0
42.5°	191.3
45°	163.8
47.5°	127.9
50°	97.2
52.5°	66.6
55°	38.1
57.5°	25.4
60°	21.1
62.5°	19.0
65°	15.9
67.5°	13.7
70°	11.6
72.5°	9.5
75°	8.5
77.5°	7.4
80°	6.3
82.5°	5.3
85°	3.2
87.5°	2.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)