

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642778

Luminaire Tested: ML5615LSNFL259FS1E - 593SNB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642778
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 593SNB - 1200LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1345.6 lumens
Efficiency: N/A
Efficacy: 100.4 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642778

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1200LM - 3500K

Luminous Intensity Polar Plot

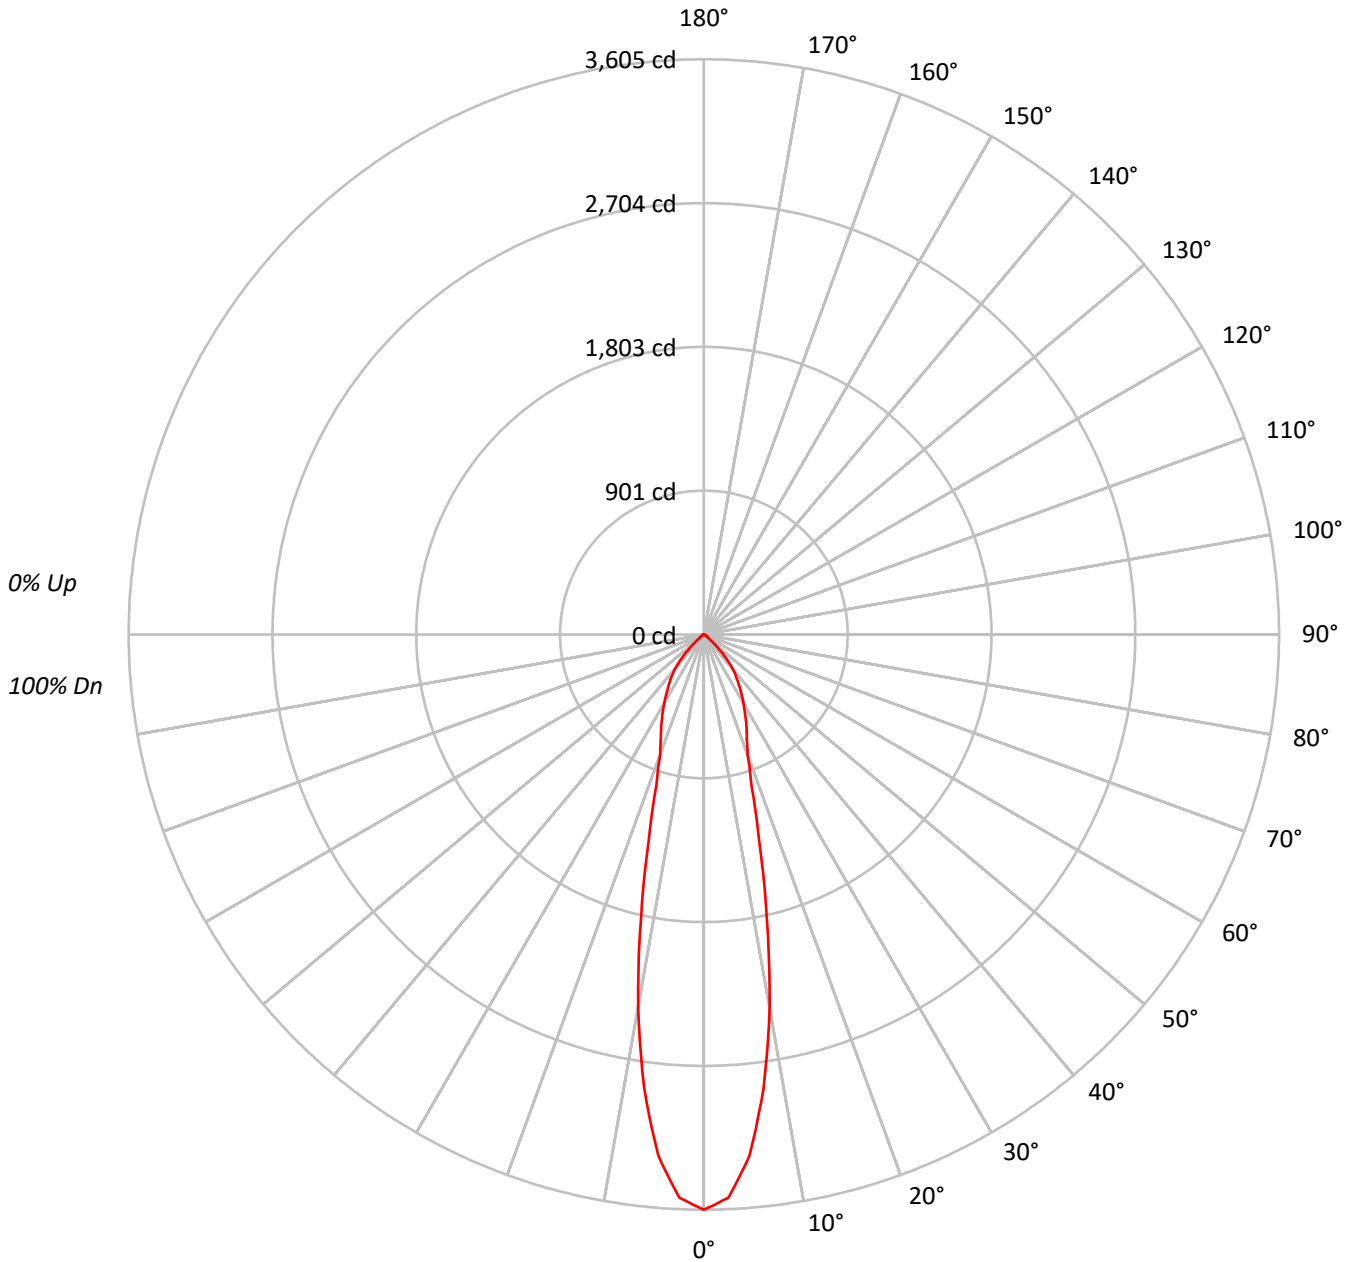



TEST NUMBER: P642778

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100	
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			94	
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88			88	
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	83			83	
4	99	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77			77	
5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	80	77	74	73			73	
6	90	82	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69			69	
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	66	65			65	
8	82	73	68	64	81	73	68	64	72	67	64	71	67	63	70	66	63	62			62	
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59			59	
10	76	67	61	58	75	66	61	58	66	61	58	65	61	58	64	60	57	56			56	

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	284606
5°	259852
10°	190016
15°	109096
20°	67239
25°	54935
30°	45194
35°	36697
40°	28916
45°	17606
50°	5576
55°	2945
60°	2116
65°	1251
70°	623
75°	397
80°	591
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17606 cd/sqm



TEST NUMBER: P642778

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	283.3	21.1
10°-20°	383.3	28.5
20°-30°	290.1	21.6
30°-40°	238.4	17.7
40°-50°	119.9	8.9
50°-60°	21.4	1.6
60°-70°	6.9	0.5
70°-80°	1.9	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	956.6	71.1
0°-40°	1195.1	88.8
0°-60°	1336.3	99.3
0°-90°	1345.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1345.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3605	
5°	3279	283
15°	1335	383
25°	631	290
35°	381	238
45°	158	120
55°	21	21
65°	7	7
75°	1	2
85°	0	1
90°	0	



TEST NUMBER: P642778

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3605.3
2.5°	3533.1
5°	3279.2
7.5°	2866.3
10°	2370.5
12.5°	1824.0
15°	1334.9
17.5°	991.5
20°	800.4
22.5°	702.9
25°	630.7
27.5°	559.9
30°	495.8
32.5°	435.6
35°	380.8
37.5°	330.1
40°	280.6
42.5°	215.1
45°	157.7
47.5°	96.2
50°	45.4
52.5°	28.1
55°	21.4
57.5°	17.4
60°	13.4
62.5°	9.4
65°	6.7
67.5°	4.0
70°	2.7
72.5°	2.7
75°	1.3
77.5°	1.3
80°	1.3
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)