

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642796

Luminaire Tested: ML5615LSNFL259FS1E - 593TBZB - 1500LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642796  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-8)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSNFL259FS1E - 593TBZB - 1500LM - 2700K  
Description: ML56 RR, 25D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1515.6 lumens  
Efficiency: N/A  
Efficacy: 88.6 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642796

CATALOG NUMBER: ML5615LSNFL259FS1E - 593TBZB - 1500LM - 2700K

### Luminous Intensity Polar Plot

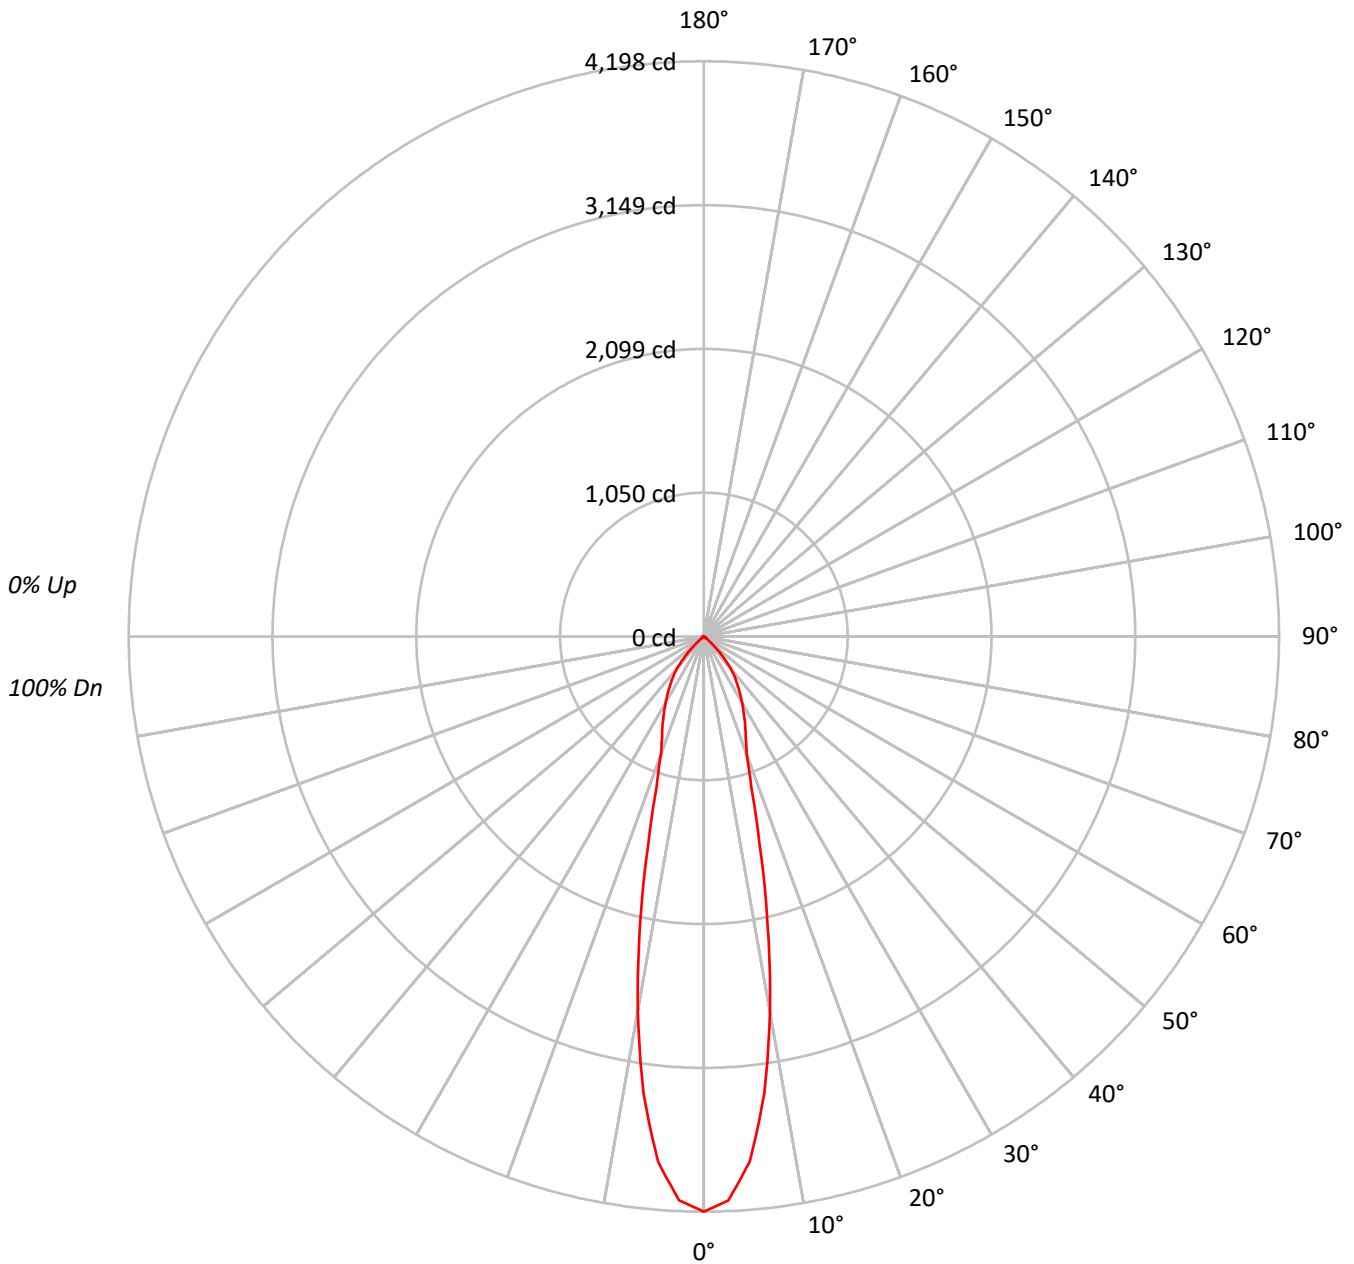



TEST NUMBER: P642796

CATALOG NUMBER: ML5615LSNFL259FS1E - 593TBZB - 1500LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89			
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	86	78	72	69	76	72	68	75	71	68	74	71	68	66			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	331410
5°	304695
10°	222689
15°	127884
20°	76573
25°	62051
30°	50763
35°	40918
40°	31255
45°	17539
50°	4581
55°	2353
60°	1468
65°	579
70°	369
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17539 cd/sqm



TEST NUMBER: P642796

CATALOG NUMBER: ML5615LSNFL259FS1E - 593TBZB - 1500LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	332.0	21.9
10°-20°	447.1	29.5
20°-30°	328.0	21.6
30°-40°	265.5	17.5
40°-50°	121.1	8.0
50°-60°	17.2	1.1
60°-70°	4.0	0.3
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1107.1	73.1
0°-40°	1372.7	90.6
0°-60°	1510.9	99.7
0°-90°	1515.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1515.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4198	
5°	3845	332
15°	1565	447
25°	712	328
35°	425	266
45°	157	121
55°	17	17
65°	3	4
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P642796

CATALOG NUMBER: ML5615LSNFL259FS1E - 593TBZB - 1500LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4198.2
2.5°	4118.9
5°	3845.1
7.5°	3367.6
10°	2778.1
12.5°	2146.6
15°	1564.8
17.5°	1144.8
20°	911.5
22.5°	796.4
25°	712.4
27.5°	631.5
30°	556.9
32.5°	488.4
35°	424.6
37.5°	367.1
40°	303.3
42.5°	225.5
45°	157.1
47.5°	87.1
50°	37.3
52.5°	23.3
55°	17.1
57.5°	14.0
60°	9.3
62.5°	6.2
65°	3.1
67.5°	1.6
70°	1.6
72.5°	1.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)