

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642825

Luminaire Tested: ML5615LSNFL259FS1E - 594SNB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642825
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 594SNB - 1200LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1572.2 lumens
Efficiency: N/A
Efficacy: 117.3 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.43
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642825
CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1200LM - 5000K

Luminous Intensity Polar Plot

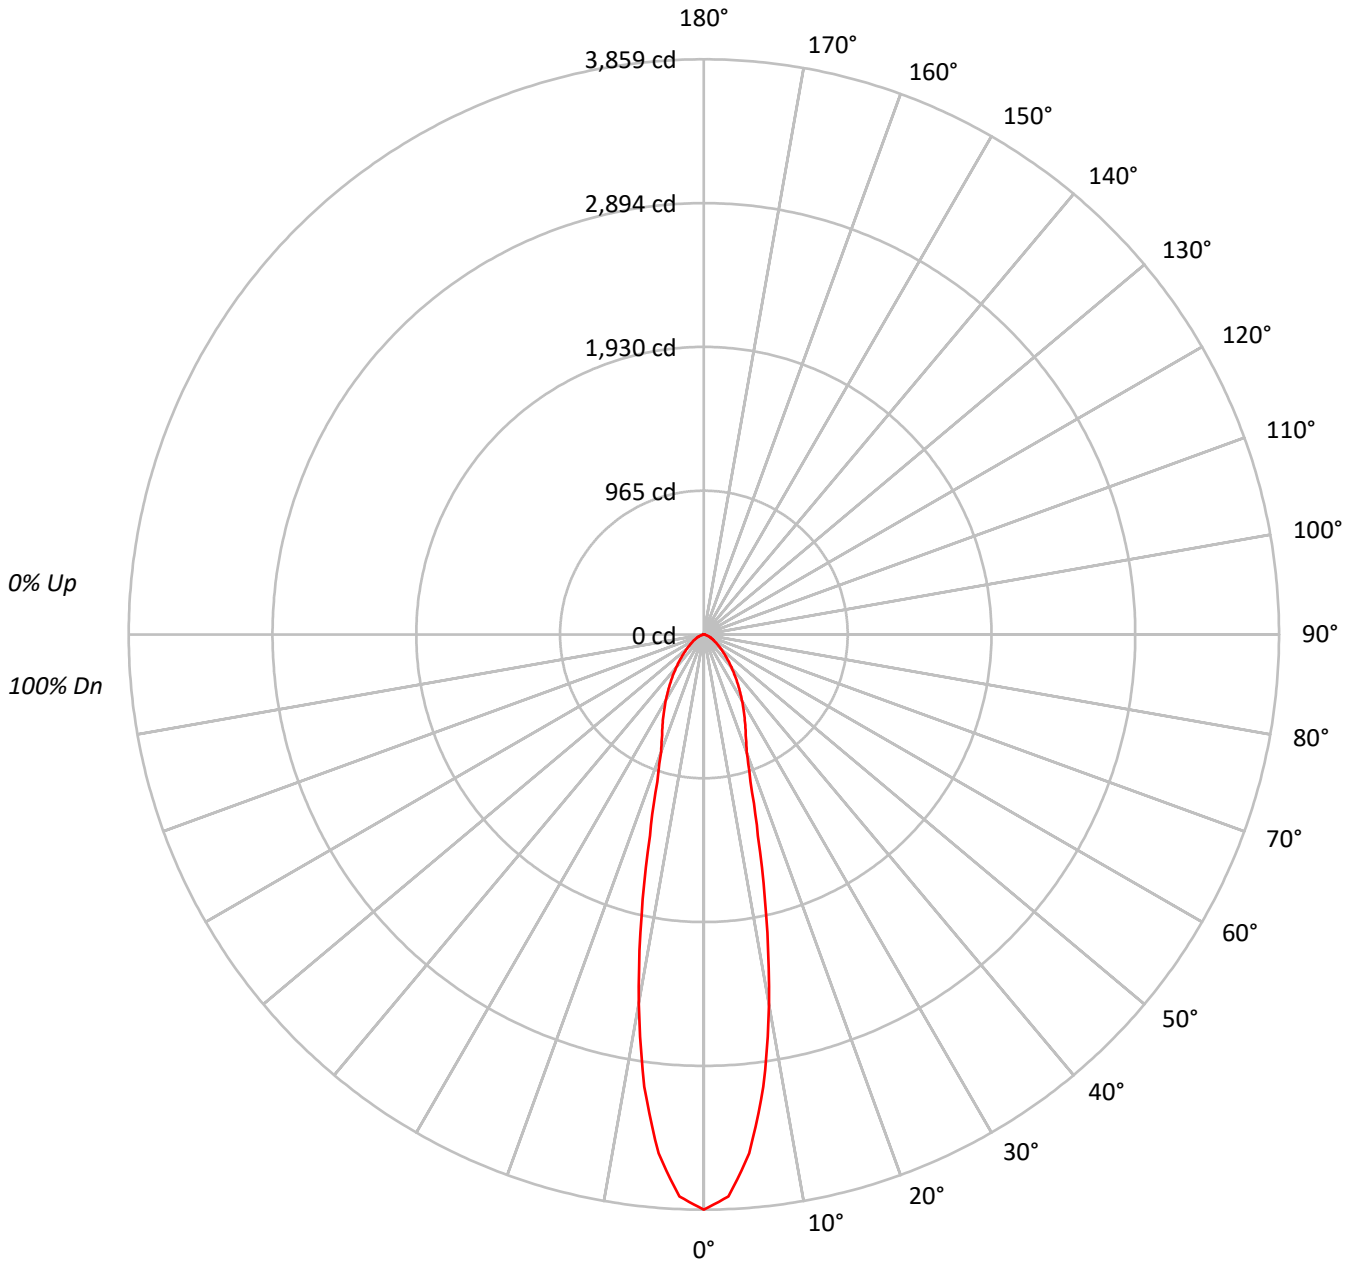



TEST NUMBER: P642825

CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85																			
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	78																			
4	96	88	82	78	94	87	81	77	84	80	76	82	78	75	81	77	74	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	67	85	76	71	66	75	70	66	74	69	66	72	68	65	64																			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54																			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	55	52	51																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	304641
5°	276857
10°	201767
15°	114375
20°	70322
25°	56877
30°	46543
35°	37430
40°	29647
45°	23288
50°	18200
55°	14258
60°	11352
65°	9134
70°	6647
75°	3508
80°	1955
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23288 cd/sqm



TEST NUMBER: P642825

CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	302.0	19.2
10°-20°	403.3	25.7
20°-30°	301.2	19.2
30°-40°	243.6	15.5
40°-50°	162.7	10.3
50°-60°	94.4	6.0
60°-70°	49.4	3.1
70°-80°	14.2	0.9
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1006.6	64.0
0°-40°	1250.2	79.5
0°-60°	1507.3	95.9
0°-90°	1572.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1572.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3859	
5°	3494	302
15°	1400	403
25°	653	301
35°	388	244
45°	209	163
55°	104	94
65°	49	49
75°	12	14
85°	0	1
90°	0	



TEST NUMBER: P642825

CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3859.1
2.5°	3774.2
5°	3493.8
7.5°	3059.4
10°	2517.1
12.5°	1928.8
15°	1399.5
17.5°	1037.1
20°	837.1
22.5°	733.6
25°	653.0
27.5°	579.7
30°	510.6
32.5°	445.9
35°	388.4
37.5°	335.1
40°	287.7
42.5°	246.0
45°	208.6
47.5°	175.5
50°	148.2
52.5°	123.7
55°	103.6
57.5°	86.3
60°	71.9
62.5°	60.4
65°	48.9
67.5°	40.3
70°	28.8
72.5°	18.7
75°	11.5
77.5°	7.2
80°	4.3
82.5°	2.9
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)