

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642829

Luminaire Tested: ML5615LSNFL259FS1E - 594SNB - 1500LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642829
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 594SNB - 1500LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1932.1 lumens
Efficiency: N/A
Efficacy: 113.0 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.43
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642829
CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1500LM - 4000K

Luminous Intensity Polar Plot

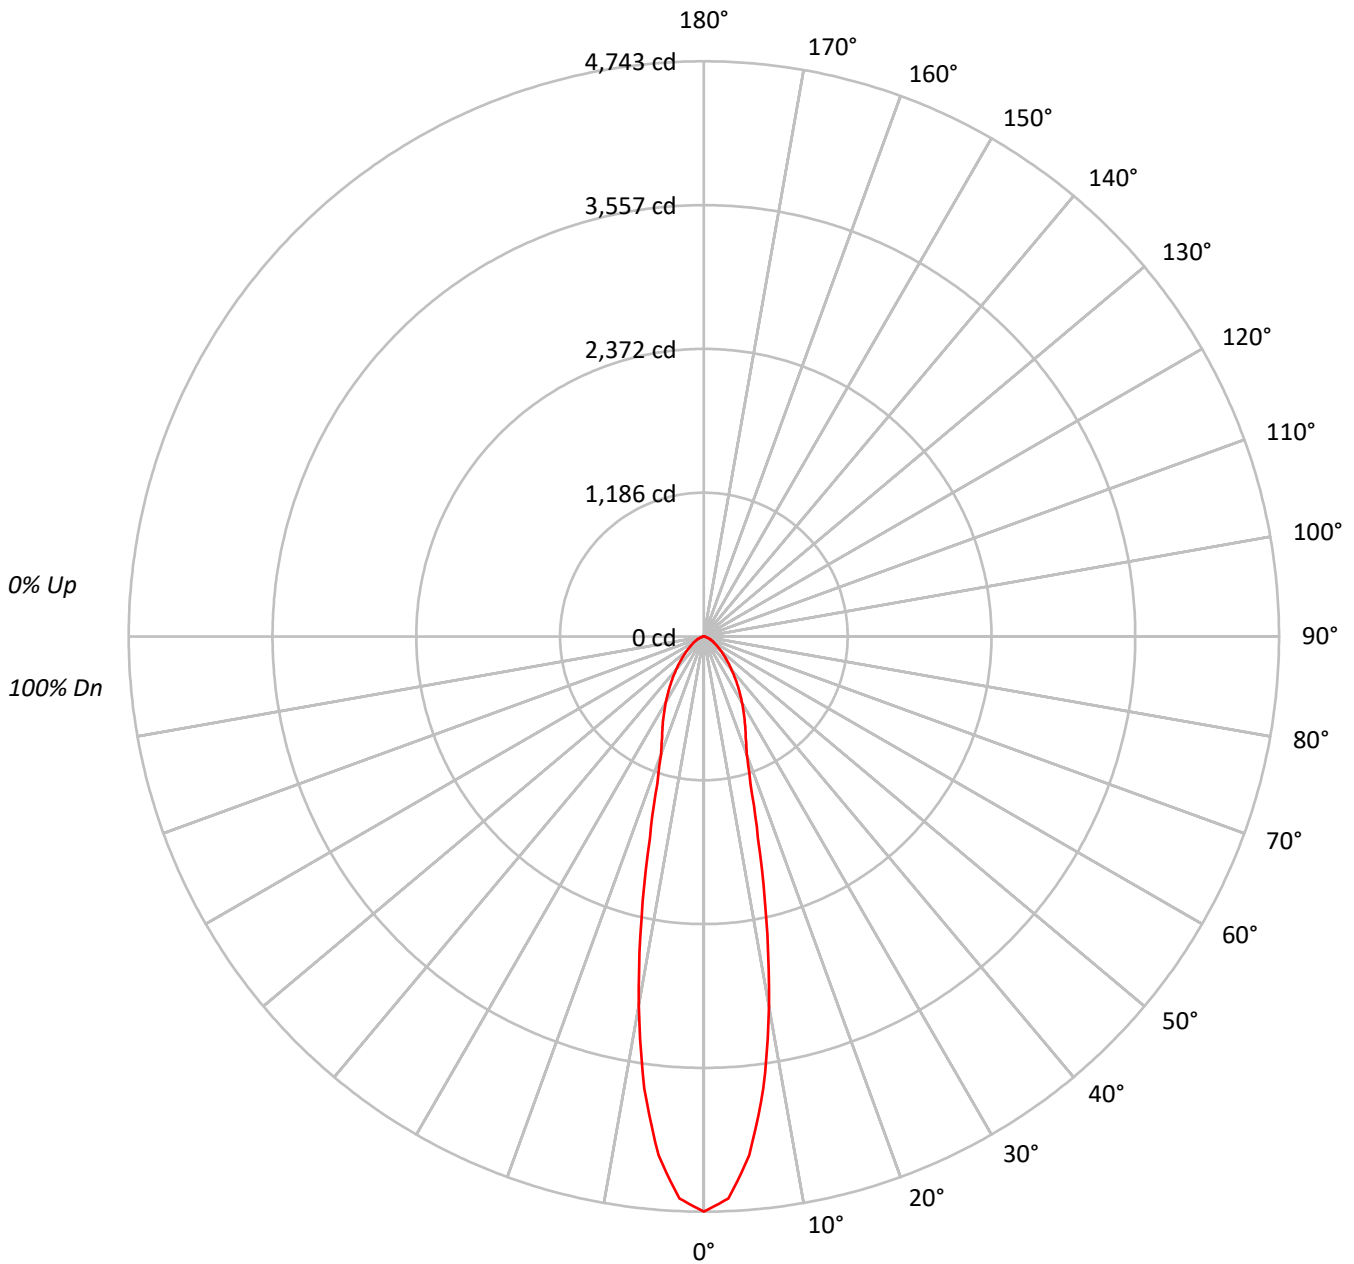



TEST NUMBER: P642829

CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1500LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85																			
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	78																			
4	96	88	82	78	94	87	81	77	84	80	76	82	78	75	81	77	74	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	67	85	76	71	66	75	70	66	74	69	66	72	68	65	64																			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54																			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	55	52	51																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	374393
5°	340243
10°	247963
15°	140568
20°	86427
25°	69899
30°	57199
35°	45997
40°	36428
45°	28613
50°	22364
55°	17520
60°	13957
65°	11226
70°	8171
75°	4301
80°	2409
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28613 cd/sqm



TEST NUMBER: P642829

CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1500LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	371.2	19.2
10°-20°	495.7	25.7
20°-30°	370.1	19.2
30°-40°	299.4	15.5
40°-50°	199.9	10.3
50°-60°	116.0	6.0
60°-70°	60.6	3.1
70°-80°	17.4	0.9
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1237.0	64.0
0°-40°	1536.4	79.5
0°-60°	1852.4	95.9
0°-90°	1932.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1932.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4743	
5°	4294	371
15°	1720	496
25°	802	370
35°	477	299
45°	256	200
55°	127	116
65°	60	61
75°	14	17
85°	0	2
90°	0	



TEST NUMBER: P642829

CATALOG NUMBER: ML5615LSNFL259FS1E - 594SNB - 1500LM - 4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	4742.7
2.5°	4638.4
5°	4293.7
7.5°	3759.9
10°	3093.4
12.5°	2370.5
15°	1720.0
17.5°	1274.5
20°	1028.8
22.5°	901.5
25°	802.5
27.5°	712.4
30°	627.5
32.5°	548.0
35°	477.3
37.5°	411.9
40°	353.5
42.5°	302.3
45°	256.3
47.5°	215.7
50°	182.1
52.5°	152.0
55°	127.3
57.5°	106.1
60°	88.4
62.5°	74.2
65°	60.1
67.5°	49.5
70°	35.4
72.5°	23.0
75°	14.1
77.5°	8.8
80°	5.3
82.5°	3.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)