

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642846

Luminaire Tested: ML5615LSNFL259FS1E - 594TBZB - 900LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642846  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-11)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSNFL259FS1E - 594TBZB - 900LM - 2700K  
Description: ML56 RR, 25D TIR OPTIC, 5" TUSCON BRONZE GIMBAL TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1094.0 lumens  
Efficiency: N/A  
Efficacy: 104.2 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.43  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642846  
CATALOG NUMBER: ML5615LSNFL259FS1E - 594TBZB - 900LM - 2700K

### Luminous Intensity Polar Plot

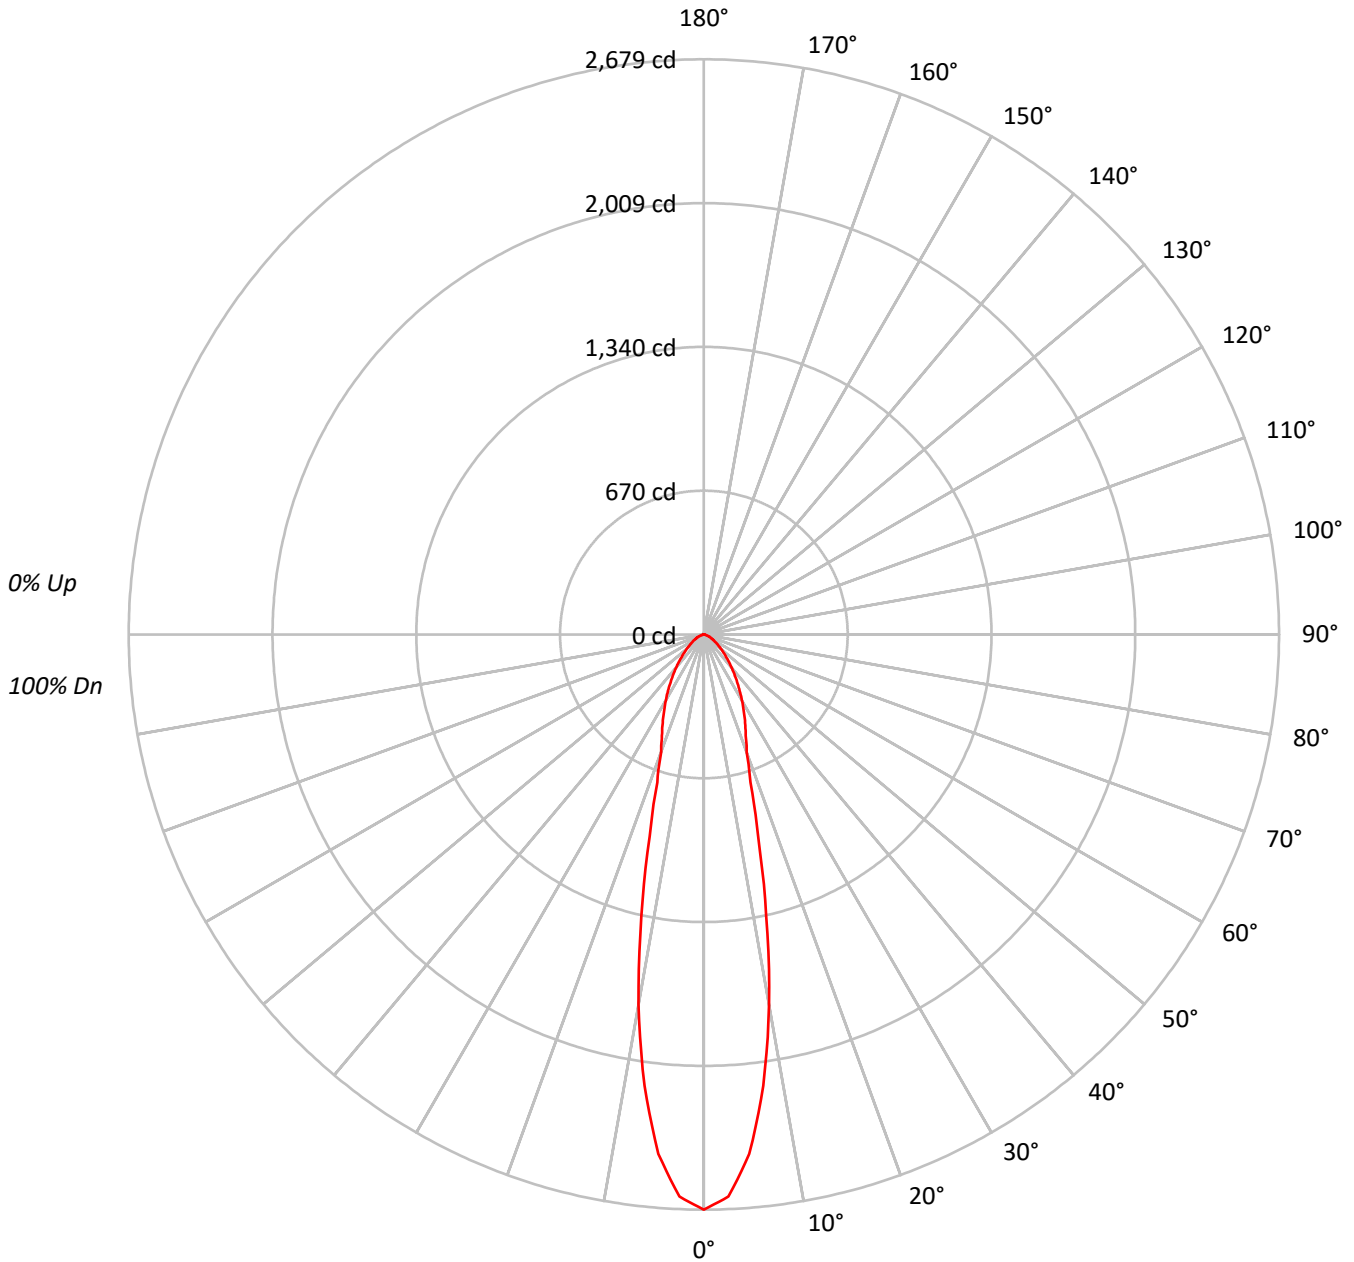



TEST NUMBER: P642846

CATALOG NUMBER: ML5615LSNFL259FS1E - 594TBZB - 900LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85																			
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	78																			
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	81	77	74	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	67	85	76	71	66	75	70	66	73	69	65	72	68	65	64																			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54																			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	211499
5°	192424
10°	140398
15°	79658
20°	48959
25°	39535
30°	32259
35°	26010
40°	20600
45°	16188
50°	12649
55°	9909
60°	7894
65°	6538
70°	4616
75°	2440
80°	1818
85°	906

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16188 cd/sqm



TEST NUMBER: P642846

CATALOG NUMBER: ML5615LSNFL259FS1E - 594TBZB - 900LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	209.7	19.2
10°-20°	280.9	25.7
20°-30°	209.3	19.1
30°-40°	169.4	15.5
40°-50°	113.3	10.4
50°-60°	65.6	6.0
60°-70°	34.6	3.2
70°-80°	10.0	0.9
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	699.9	64.0
0°-40°	869.2	79.5
0°-60°	1048.1	95.8
0°-90°	1094.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1094.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2679	
5°	2428	210
15°	975	281
25°	454	209
35°	270	169
45°	145	113
55°	72	66
65°	35	35
75°	8	10
85°	1	1
90°	0	



TEST NUMBER: P642846

CATALOG NUMBER: ML5615LSNFL259FS1E - 594TBZB - 900LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2679.2
2.5°	2620.2
5°	2428.3
7.5°	2119.4
10°	1751.5
12.5°	1342.6
15°	974.7
17.5°	722.8
20°	582.8
22.5°	509.9
25°	453.9
27.5°	402.9
30°	353.9
32.5°	310.9
35°	269.9
37.5°	232.9
40°	199.9
42.5°	171.0
45°	145.0
47.5°	123.0
50°	103.0
52.5°	86.0
55°	72.0
57.5°	60.0
60°	50.0
62.5°	42.0
65°	35.0
67.5°	28.0
70°	20.0
72.5°	13.0
75°	8.0
77.5°	5.0
80°	4.0
82.5°	2.0
85°	1.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)