

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642885

Luminaire Tested: ML5615LSNFL259FS1E - 691WB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642885
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 691WB - 1200LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 6" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1560.6 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642885
CATALOG NUMBER: ML5615LSNFL259FS1E - 691WB - 1200LM - 5000K

Luminous Intensity Polar Plot

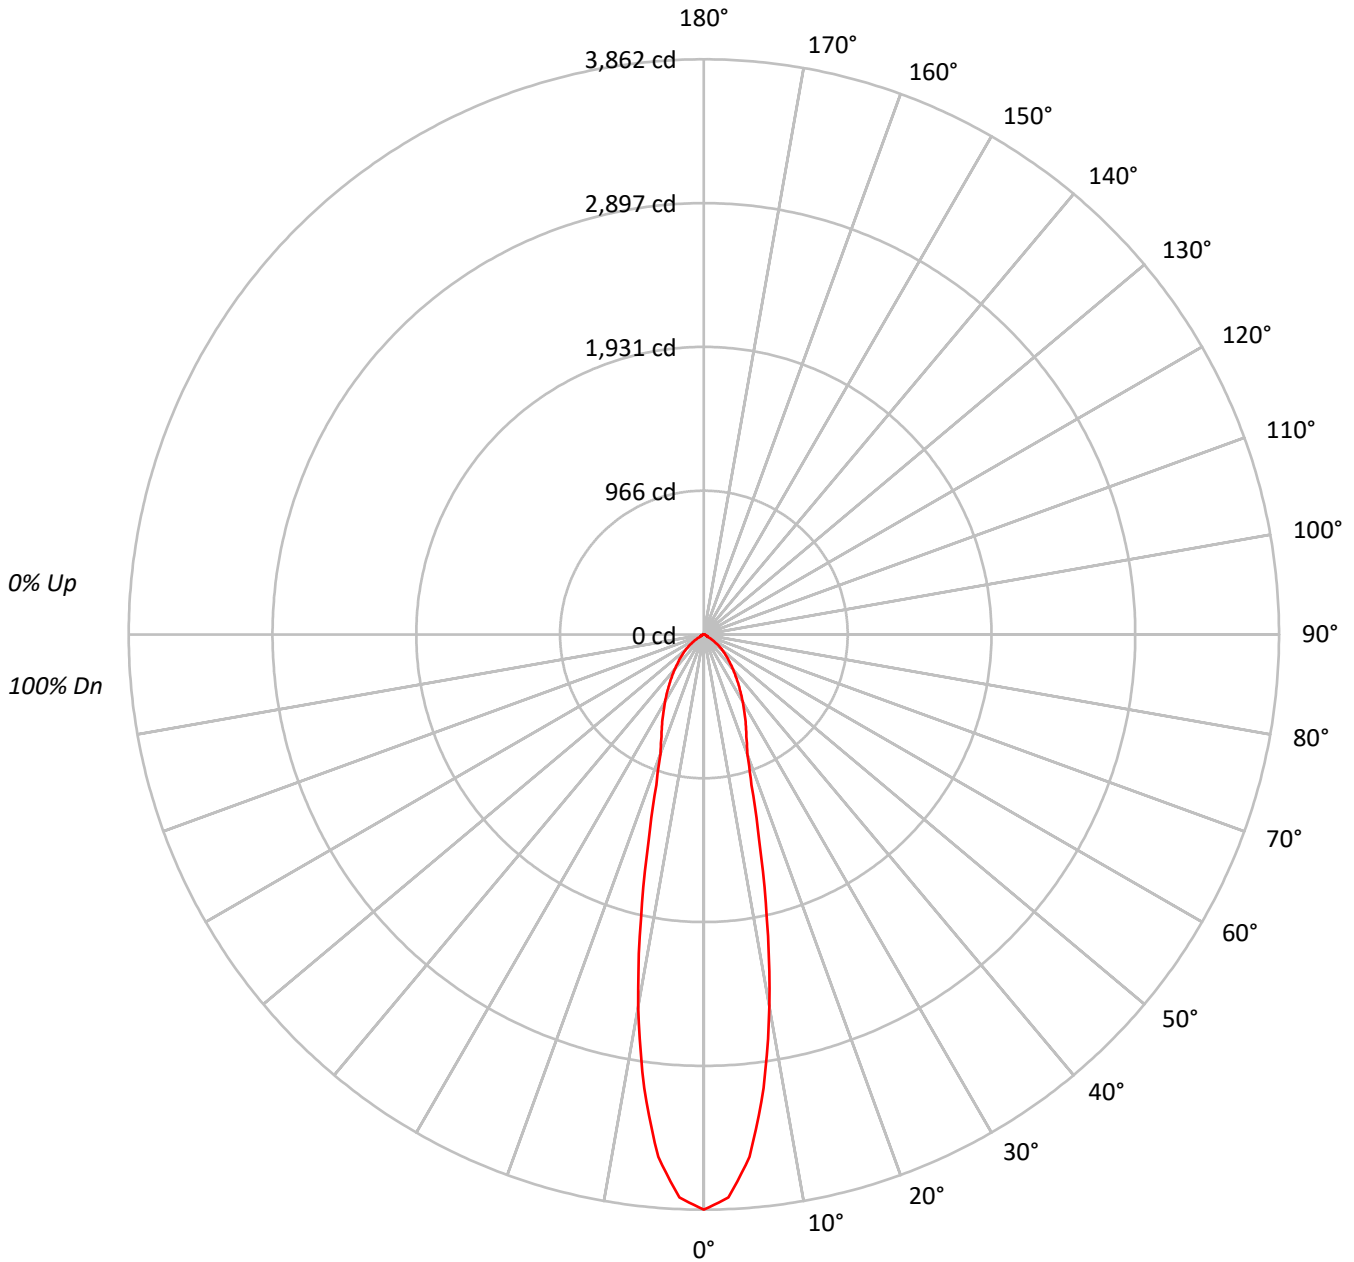



TEST NUMBER: P642885

CATALOG NUMBER: ML5615LSNFL259FS1E - 691WB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	91	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80																			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74																			
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69																			
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65																			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61																			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58																			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55																			
10	73	63	58	54	72	63	58	54	62	57	54	61	57	54	61	57	53	52																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	211699
5°	193754
10°	141152
15°	81136
20°	49675
25°	40194
30°	32961
35°	26856
40°	21612
45°	17281
50°	13611
55°	8793
60°	3465
65°	2607
70°	2068
75°	1822
80°	1831
85°	1824

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17281 cd/sqm



TEST NUMBER: P642885

CATALOG NUMBER: ML5615LSNFL259FS1E - 691WB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	303.6	19.5
10°-20°	409.9	26.3
20°-30°	306.2	19.6
30°-40°	251.7	16.1
40°-50°	173.5	11.1
50°-60°	83.2	5.3
60°-70°	20.0	1.3
70°-80°	9.3	0.6
80°-90°	3.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1019.7	65.3
0°-40°	1271.4	81.5
0°-60°	1528.1	97.9
0°-90°	1560.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1560.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3862	
5°	3521	304
15°	1430	410
25°	664	306
35°	401	252
45°	223	174
55°	92	83
65°	20	20
75°	9	9
85°	3	3
90°	0	



TEST NUMBER: P642885
CATALOG NUMBER: ML5615LSNFL259FS1E - 691WB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3861.7
2.5°	3784.1
5°	3520.9
7.5°	3070.7
10°	2535.7
12.5°	1954.6
15°	1429.6
17.5°	1058.6
20°	851.5
22.5°	743.6
25°	664.5
27.5°	589.7
30°	520.7
32.5°	457.4
35°	401.3
37.5°	349.5
40°	302.0
42.5°	260.3
45°	222.9
47.5°	189.9
50°	159.6
52.5°	129.4
55°	92.0
57.5°	59.0
60°	31.6
62.5°	23.0
65°	20.1
67.5°	15.8
70°	12.9
72.5°	10.1
75°	8.6
77.5°	7.2
80°	5.8
82.5°	4.3
85°	2.9
87.5°	1.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)