

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642913

Luminaire Tested: ML5615LSNFL259FS1E - 692SC - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642913
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 692SC - 1200LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1441.9 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 0.37 / 0.37 / 0.39
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642913

CATALOG NUMBER: ML5615LSNFL259FS1E - 692SC - 1200LM - 3500K

Luminous Intensity Polar Plot

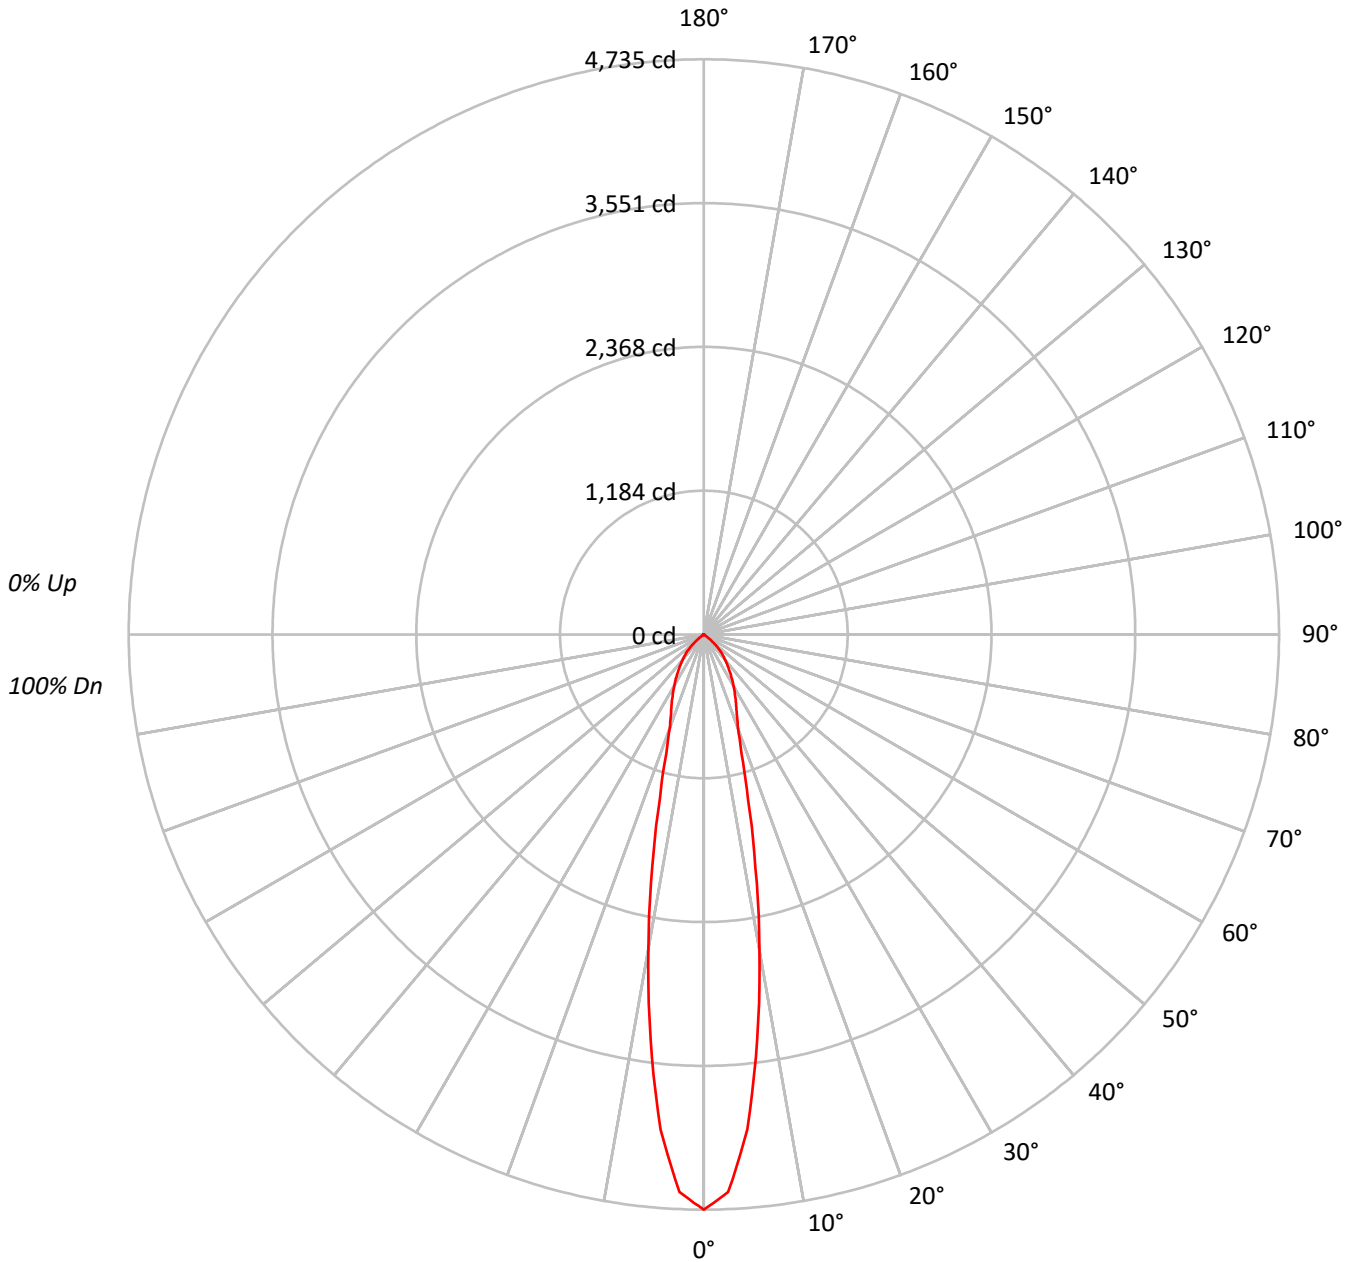



TEST NUMBER: P642913

CATALOG NUMBER: ML5615LSNFL259FS1E - 692SC - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89																			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83																			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78																			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74																			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70																			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66																			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63																			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60																			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	66	62	59	58																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	259595
5°	225198
10°	146535
15°	79518
20°	47732
25°	37847
30°	30802
35°	24695
40°	19422
45°	14823
50°	7642
55°	1787
60°	1031
65°	519
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14823 cd/sqm



TEST NUMBER: P642913

CATALOG NUMBER: ML5615LSNFL259FS1E - 692SC - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	341.9	23.7
10°-20°	406.8	28.2
20°-30°	289.4	20.1
30°-40°	231.8	16.1
40°-50°	141.5	9.8
50°-60°	26.4	1.8
60°-70°	4.1	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1038.2	72.0
0°-40°	1270.0	88.1
0°-60°	1437.8	99.7
0°-90°	1441.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1441.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4735	
5°	4092	342
15°	1401	407
25°	626	289
35°	369	232
45°	191	141
55°	19	26
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642913

CATALOG NUMBER: ML5615LSNFL259FS1E - 692SC - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	4735.4
2.5°	4593.7
5°	4092.3
7.5°	3359.7
10°	2632.4
12.5°	1958.6
15°	1401.1
17.5°	1029.4
20°	818.2
22.5°	707.2
25°	625.7
27.5°	553.5
30°	486.6
32.5°	426.5
35°	369.0
37.5°	318.2
40°	271.4
42.5°	231.3
45°	191.2
47.5°	137.7
50°	89.6
52.5°	40.1
55°	18.7
57.5°	12.0
60°	9.4
62.5°	6.7
65°	4.0
67.5°	1.3
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)