

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642939

Luminaire Tested: ML5615LSNFL259FS1E - 692W - 900LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642939
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 692W - 900LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 6" WHITE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1216.4 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642939
CATALOG NUMBER: ML5615LSNFL259FS1E - 692W - 900LM - 4000K

Luminous Intensity Polar Plot

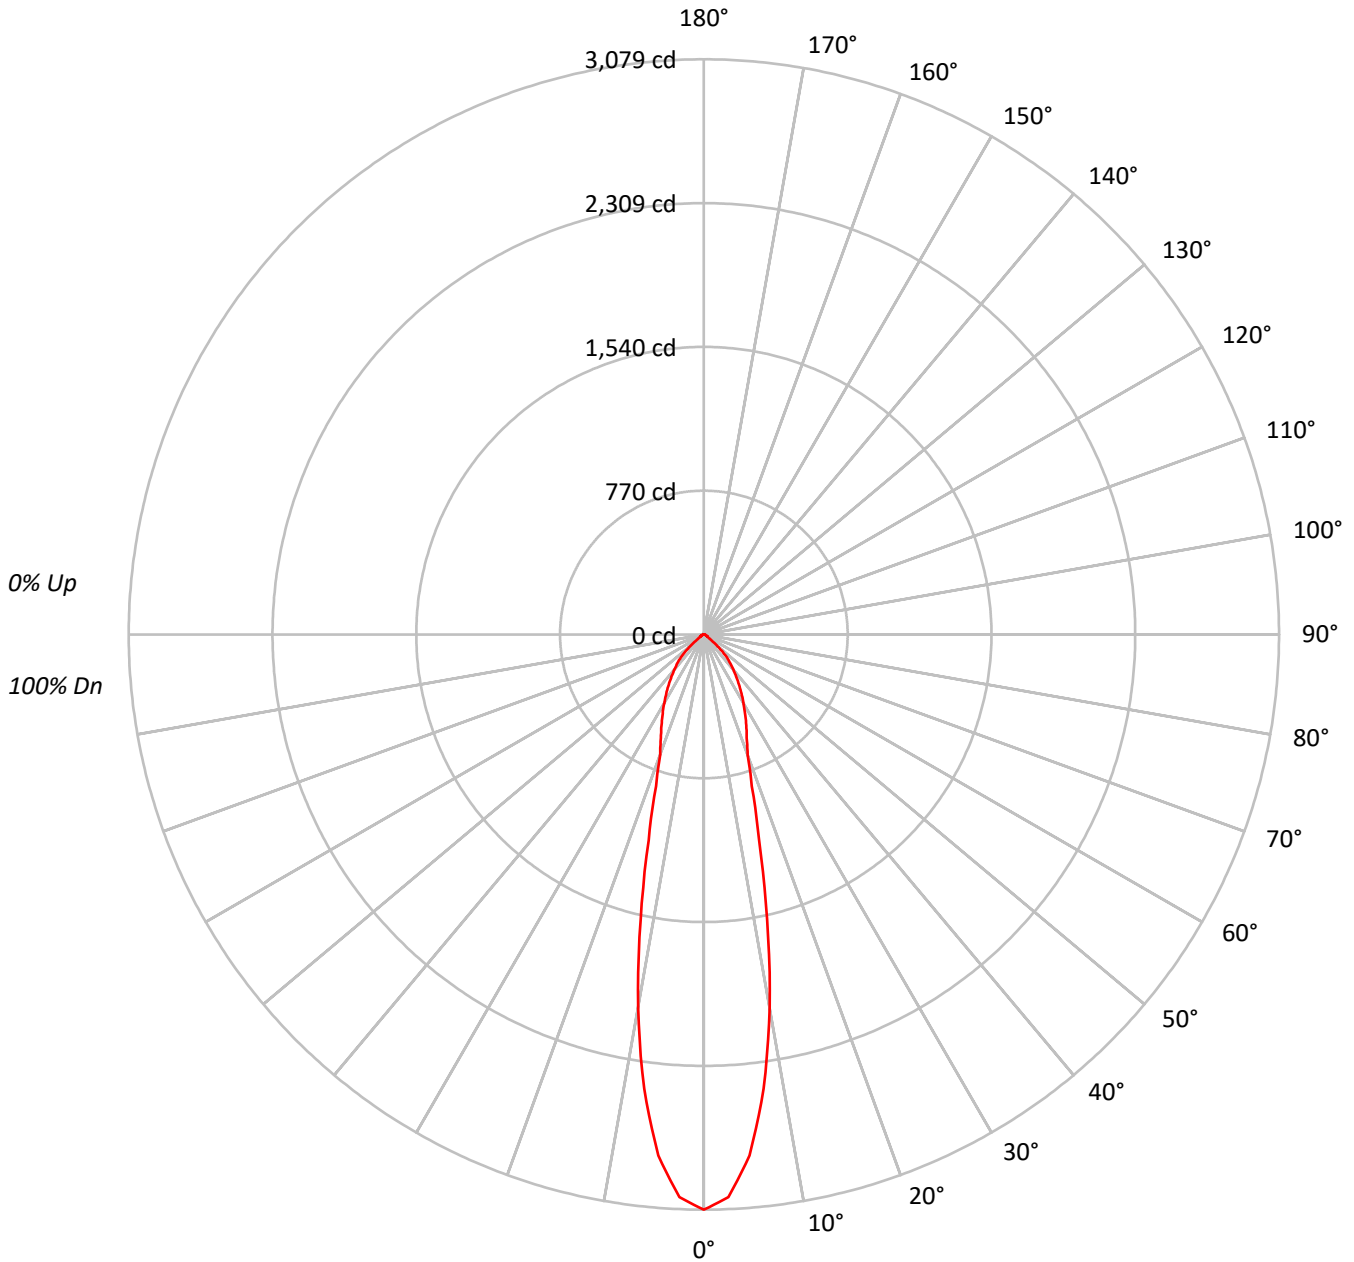



TEST NUMBER: P642939

CATALOG NUMBER: ML5615LSNFL259FS1E - 692W - 900LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	81																			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75																			
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70																			
6	88	79	74	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66																			
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	62																			
8	80	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	61	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	61	57	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	54																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	168786
5°	154050
10°	112996
15°	64762
20°	39915
25°	32451
30°	26833
35°	21904
40°	17569
45°	13660
50°	7565
55°	2934
60°	2368
65°	2062
70°	1827
75°	1927
80°	1799
85°	1447

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13660 cd/sqm



TEST NUMBER: P642939

CATALOG NUMBER: ML5615LSNFL259FS1E - 692W - 900LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	242.1	19.9
10°-20°	328.2	27.0
20°-30°	247.4	20.3
30°-40°	205.1	16.9
40°-50°	130.8	10.8
50°-60°	34.8	2.9
60°-70°	16.1	1.3
70°-80°	9.1	0.8
80°-90°	2.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	817.7	67.2
0°-40°	1022.9	84.1
0°-60°	1188.5	97.7
0°-90°	1216.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1216.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3079	
5°	2799	242
15°	1141	328
25°	536	247
35°	327	205
45°	176	131
55°	31	35
65°	16	16
75°	9	9
85°	2	3
90°	0	



TEST NUMBER: P642939

CATALOG NUMBER: ML5615LSNFL259FS1E - 692W - 900LM - 4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3078.9
2.5°	3015.3
5°	2799.4
7.5°	2451.6
10°	2029.9
12.5°	1561.6
15°	1141.1
17.5°	851.3
20°	684.2
22.5°	600.1
25°	536.5
27.5°	477.4
30°	423.9
32.5°	373.9
35°	327.3
37.5°	284.1
40°	245.5
42.5°	210.3
45°	176.2
47.5°	130.7
50°	88.7
52.5°	46.6
55°	30.7
57.5°	25.0
60°	21.6
62.5°	19.3
65°	15.9
67.5°	13.6
70°	11.4
72.5°	10.2
75°	9.1
77.5°	6.8
80°	5.7
82.5°	3.4
85°	2.3
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)