

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642944

Luminaire Tested: ML5615LSNFL259FS1E - 693BB - 1200LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642944
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-18)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 693BB - 1200LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1435.6 lumens
Efficiency: N/A
Efficacy: 107.1 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.43
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642944

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 1200LM - 4000K

Luminous Intensity Polar Plot

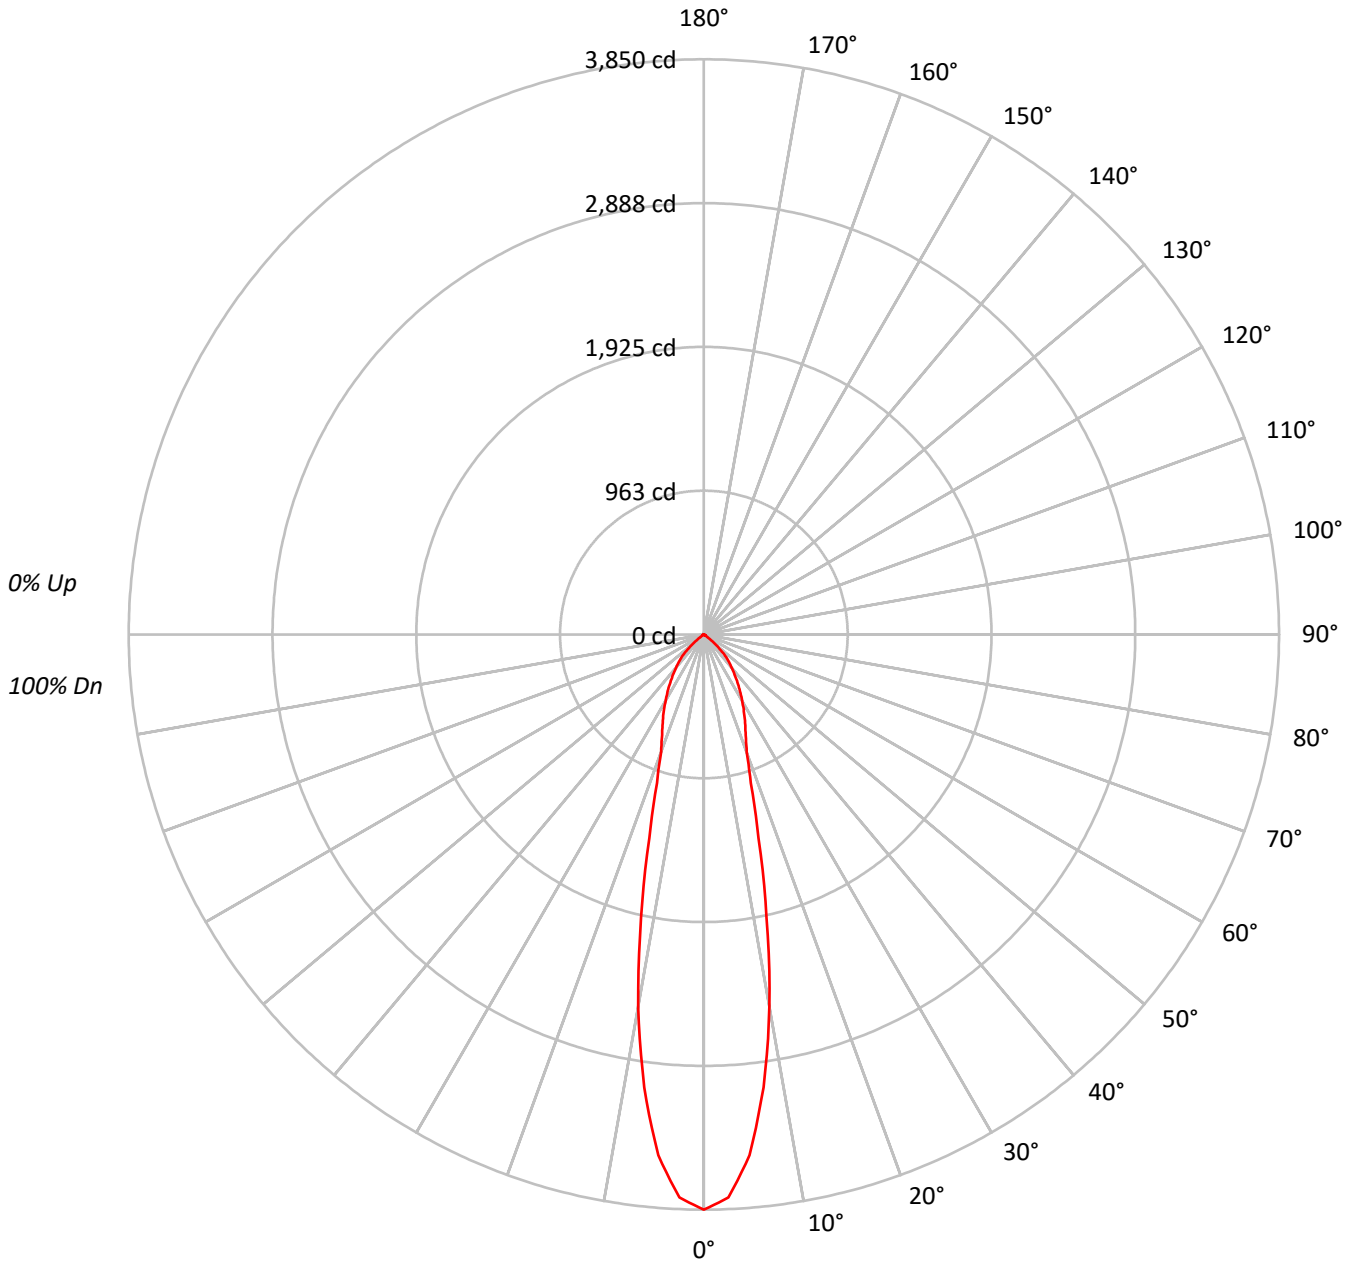



TEST NUMBER: P642944

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 1200LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88																			
3	103	97	92	89	101	96	92	88	93	90	87	91	88	85	89	86	84	82																			
4	98	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77																			
5	94	86	81	76	92	85	80	76	83	79	75	82	78	75	80	77	74	73																			
6	90	81	76	72	88	80	75	71	79	74	71	78	74	70	76	73	70	69																			
7	86	77	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65																			
8	82	73	68	64	81	73	67	64	72	67	63	71	66	63	70	66	63	62																			
9	79	70	64	60	78	69	64	60	68	64	60	67	63	60	67	63	60	59																			
10	76	67	61	58	75	66	61	57	65	61	57	65	60	57	64	60	57	56																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	211058
5°	192543
10°	140790
15°	80103
20°	48765
25°	39510
30°	32423
35°	26187
40°	20696
45°	15730
50°	7974
55°	1787
60°	1107
65°	558
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15730 cd/sqm



TEST NUMBER: P642944

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 1200LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	302.3	21.1
10°-20°	405.5	28.2
20°-30°	300.8	21.0
30°-40°	245.5	17.1
40°-50°	150.0	10.4
50°-60°	27.1	1.9
60°-70°	4.4	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1008.7	70.3
0°-40°	1254.1	87.4
0°-60°	1431.2	99.7
0°-90°	1435.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1435.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3850	
5°	3499	302
15°	1411	406
25°	653	301
35°	391	245
45°	203	150
55°	19	27
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642944

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 1200LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3850.0
2.5°	3772.3
5°	3498.9
7.5°	3057.2
10°	2529.2
12.5°	1940.8
15°	1411.4
17.5°	1041.6
20°	835.9
22.5°	729.4
25°	653.2
27.5°	579.8
30°	512.2
32.5°	450.3
35°	391.3
37.5°	338.1
40°	289.2
42.5°	246.0
45°	202.9
47.5°	145.3
50°	93.5
52.5°	40.3
55°	18.7
57.5°	12.9
60°	10.1
62.5°	7.2
65°	4.3
67.5°	1.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)